


WAAS CH 93702 W06A	APP CRS 057°	Rwy Ldg TDZE Apt Elev	7201 2351 2351
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

GENERAL WM J FOX AIRFIELD (WJT)

RNP APCH - GPS.				
	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using PMD altimeter setting. When local altimeter setting not received, use PMD altimeter setting and increase LPV DA to 2646 feet, increase LNAV/VNAV DA to 2694 feet, increase all MDAs 60 feet, and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.		MISSED APPROACH: Climb to 6000 direct SISOY and on track 091° to ETHER and hold.	
	ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER★ 118.525 (CTAF) 256.9	GND CON 121.7 256.9

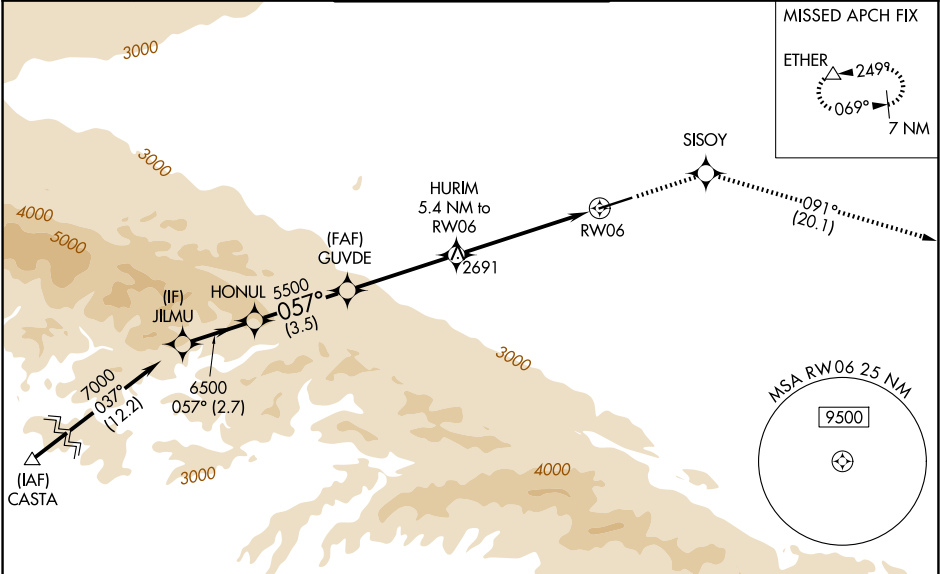

ELEV 2351		TDZE 2351	
JILMU		6000	
HONUL		SISOY	
GUVDE		tr 091°	
GP 3.00° TCH 40		ETHER	
7000		6500	
057°		5500	
2.7 NM		4.1 NM	
3.5 NM		3.7 NM	
1.7 NM		1.7 NM	
CATEGORY		A	
LPV DA		2601-1 250 (300-1)	
LNAV/VNAV DA		2649-1 298 (300-1)	
LNAV MDA		2940-1 589 (600-1)	
CIRCLING		3120-2¼ 769 (800-2¼)	
2940-1 589 (600-1)		3120-2½ 769 (800-2½)	
REIL Rwy 6 and 24		MIRL Rwy 6-24	