

WAAS CH 78103 W04A	APP CRS 038°	Rwy Idg 11001 TDZE 947 Apt Elev 964
--	------------------------	--

RNAV (GPS) RWY 4

GREENVILLE SPARTANBURG INTL (GSP)

RNP APCH.

 Increase LNAV/Cat C/D visibility to RVR 8000. When local altimeter setting not received, use Greenville Downtown altimeter setting; increase LPV DA to 1176 feet and LNAV/VNAV DA to 1450 feet and all Cats visibility to RVR 5500; increase all MDAs 40 feet and visibility LNAV Cats C and D to RVR 4500 and Circling Cat D visibility ¼ SM. For inop ALS, when using Greenville Downtown altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ SM. Baro-VNAV NA when using Greenville Downtown altimeter setting.

ALSF-2

MISSED APPROACH:
Climb to 3000 direct
RAYCE and hold.



ATIS
134.25

GREER APP CON★
118.8 270.275


GREER TOWER ★
120.1 (CTAF) 251.15

GND CON
121.9

CLNC DEL
121.9

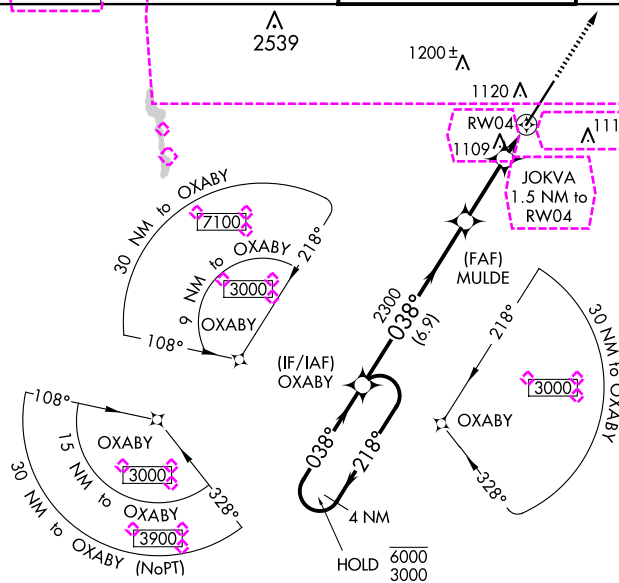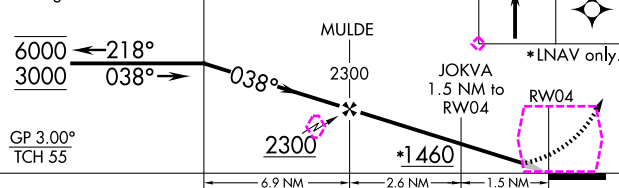UNICOM
122.954 NM
Holding Pattern

CATEGORY		A	B	C	D
LPV	DA	1147/18 200 (200-½)			
LNAV/ VNAV	DA	1421/50 474 (500-1)			
LNAV	MDA	1360/24	413 (400-½)	1360/40	413 (400-¾)
C CIRCLING		1440-1	476 (500-1)	1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)

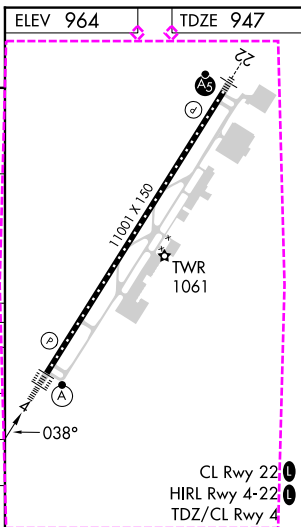

GREER, SOUTH CAROLINA
Amdt 3 05DEC19

34°54'N-82°13'W

GREENVILLE SPARTANBURG INTL (GSP)
RNAV (GPS) RWY 4

SE-2. 11 JUN 2026 to 09 JUL 2026

GREER, SOUTH CAROLINA

AL-5124 (FAA)

26190

WAAS CH 78103 W04A	APP CRS 038°	Rwy Ldg: 11001 TDZE: 947 Apt Elev: 964
--	------------------------	---

RNAV (GPS) RWY 4
GREENVILLE SPARTANBURG INTL (GSP)




RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and increase LNAV Cat C/D visibility to RVR 6000. When local altimeter setting not received, use Greenville Downtown altimeter setting: increase LPV DA to 1176 feet and LNAV/VNAV DA to 1450 feet and all Cats visibility to RVR 5500; increase all MDAs 40 feet and visibility LNAV Cats C and D to RVR 4500 and Circling Cat D visibility ¼ SM. For inop ALS, when using Greenville Downtown altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ SM. Baro-VNAV NA when using Greenville Downtown altimeter setting.

ALSF-2

MISSED APPROACH:
Climb to 3000 direct RAYCE and hold.

ATIS 134.25	GREER APP CON* 118.8 270.275	GREER TOWER* 120.1(CTAF) 251.15	GND CON 121.9	UNICOM 122.95
------------------------------	---	--	--------------------------------	--------------------------------

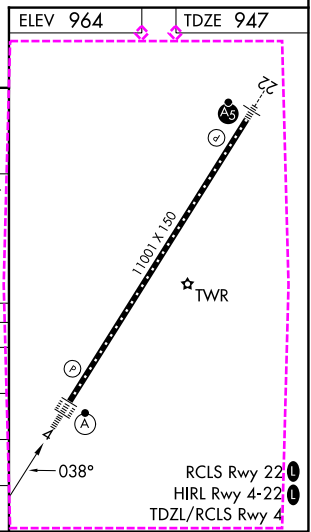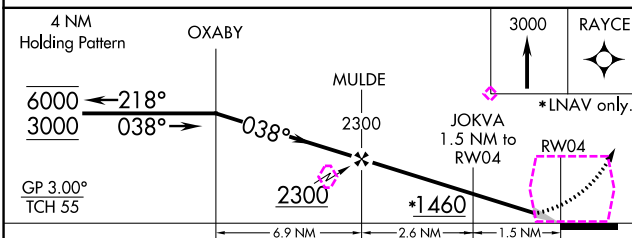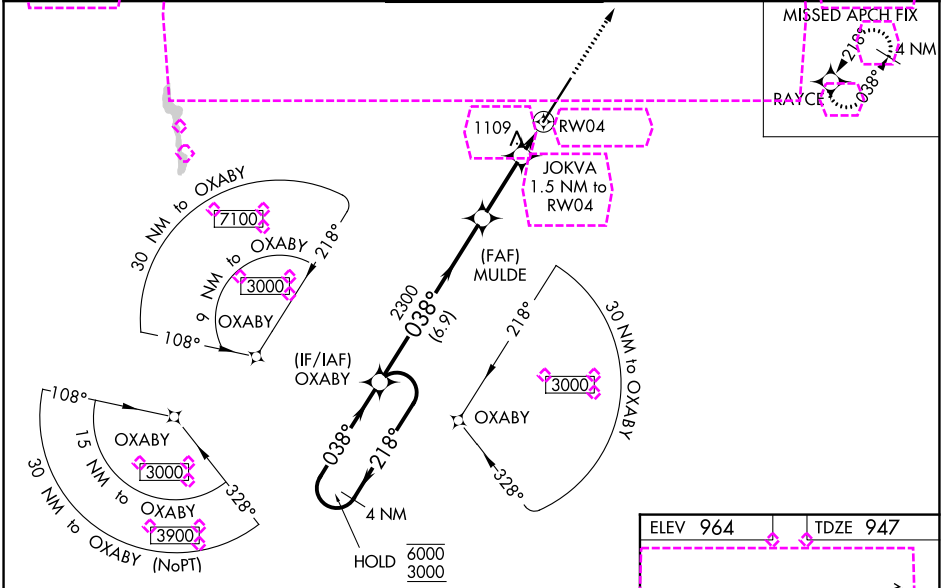

CATEGORY	A	B	C	D
LPV DA		1147/18	200 (200-½)	
LNAV/VNAV DA		1421/50	474 (500-1)	
LNAV MDA	1360/24	413 (400-½)	1360/40	413 (400-¾)
CIRCLING	1440-1	476 (500-1)	1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)