

WAAS CH 50309 W22A	APP CRS 218°	Rwy Idg 5420 TDZE 161 Apt Elev 163
--	------------------------	---

RNAV (GPS) RWY 22

MC MINNVILLE MUNI (MMV)

RNP APCH.


⚠ Baro-VNAV NA when using Aurora State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. When local altimeter setting not received, use Aurora State altimeter setting; increase LPV DA to 534 feet, LNAV/VNAV DA to 703 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ½ SM. For inop ALS, increase LPV all Cats visibility to ½ SM, LNAV/VNAV all Cats to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. For inop ALS when using Aurora State altimeter setting, increase LNAV/VNAV all Cats visibility to 1 ½ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1 ½ SM. VDP NA when using Aurora State altimeter setting.

MALSR




MISSED APPROACH:
Climb to 4900 direct
OVUGE then on 218°
track to PUCIV and hold,
continue climb-in-hold
to 4900.

ASOS 135.675	PORTLAND APP CON 126.0 284.6 (NORTH)	SEATTLE CENTER 125.8 291.7 (SOUTH)	CLNC DEL 118.35	UNICOM 123.0 (CTAF) 1
------------------------	--	--	---------------------------	--

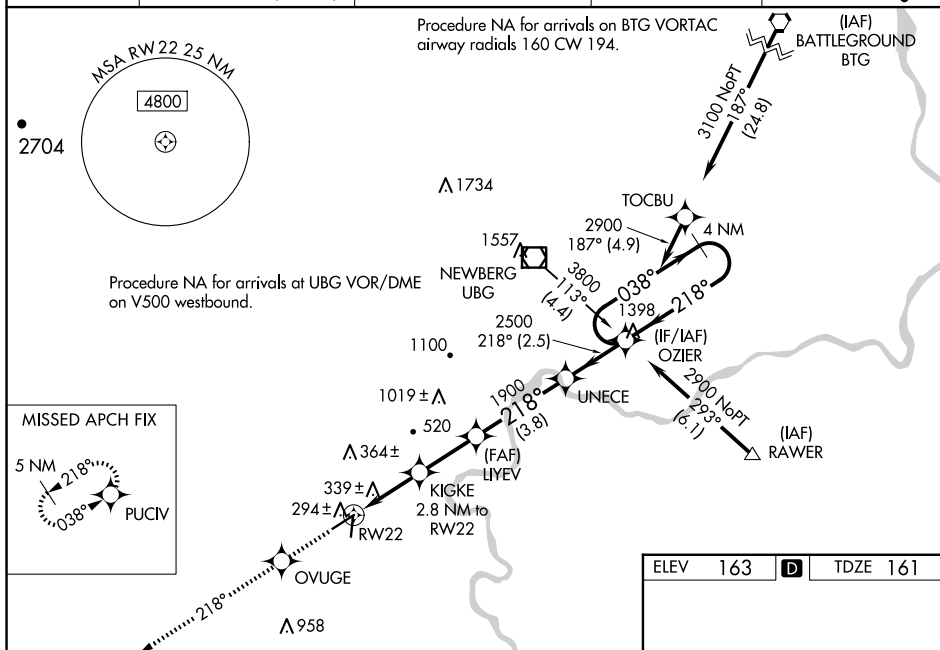

4900 ↑		OVUGE ✧		218° tr		PUCIV ✧	
* RNAV only				KIGKE 2.8 NM to RW22		LIYEV 1900	
RW22 ↻		* 1.7 NM to RW22		218°		UNECE	
1.7		1.1		2.4 NM		3.8 NM	
1100*		1900		2500		OZIER	
						4 NM Holding Pattern	
						038° → 2900 ← 218°	
						GP 3.00° TCH 57	
CATEGORY		A		B		C	
LPV DA		474-3/4 313 (400-3/4)					
RNAV/ VNAV DA		643-1 1/4 482 (500-1 1/4)					
RNAV MDA		740-3/4 579 (600-3/4)				740-1 1/4 579 (600-1 1/4)	

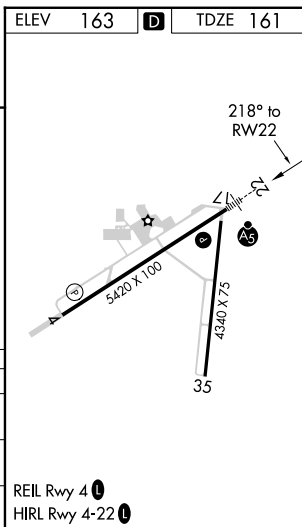

RNAV (GPS) RWY 22