

26190




ILS PRM RWY 27L
(CLOSE PARALLEL)

RADAR required for procedure entry.
DME or RADAR required.


T Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. Dual VHF comm required. See additional requirements on AAUP.

MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.


D-ATIS	ATLANTA APP CON	ATLANTA TOWER						ALL	GND CON				ALL
119.65	134.725 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS		(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS	
		119.1	125.325	123.85	119.3	119.5	254.4		121.9	121.75	121.65	254.4	
		PRM 132.55											

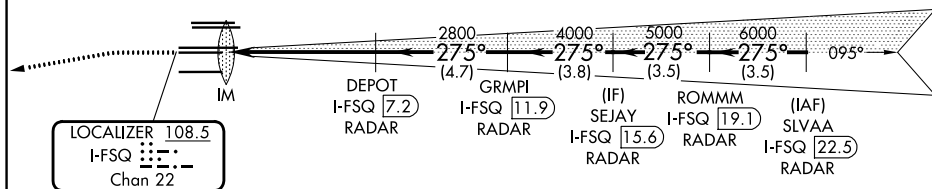

ELEV 1026	D	TDZE 999
-----------	----------	----------

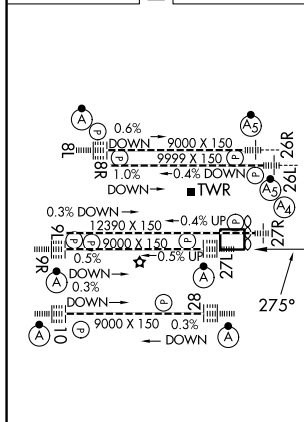

HIRL all Rwys
TDZL/RCLS Rwys 8L,
9R, 10, 26R, 27L and 28

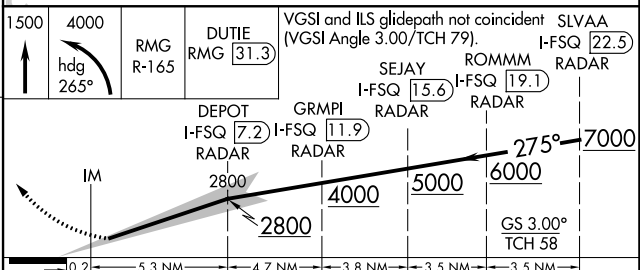

CATEGORY	A	B	C	D
S-ILS 27L	1199/18 200 (200-½)			

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

ILS PRM RWY 27L (CLOSE PARALLEL)

SE-4, 06 AUG 2026 to 03 SEP 2026