

WAAS

CH **48802**

W05A

APP CRS

051°

Rwy Ldg

9508

TDZE

953

Apt Elev

986

RNAV (GPS) RWY 5L

MC GHEE TYSON (T'YS)

RNP APCH - GPS.

T

A


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

A5

MISSED APPROACH: Climb to 1500 then climb to 4000 direct VXV VORTAC and hold, continue climb-in-hold to 4000.

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6
-----------------------	---	---------------------------------------	-------------------------------

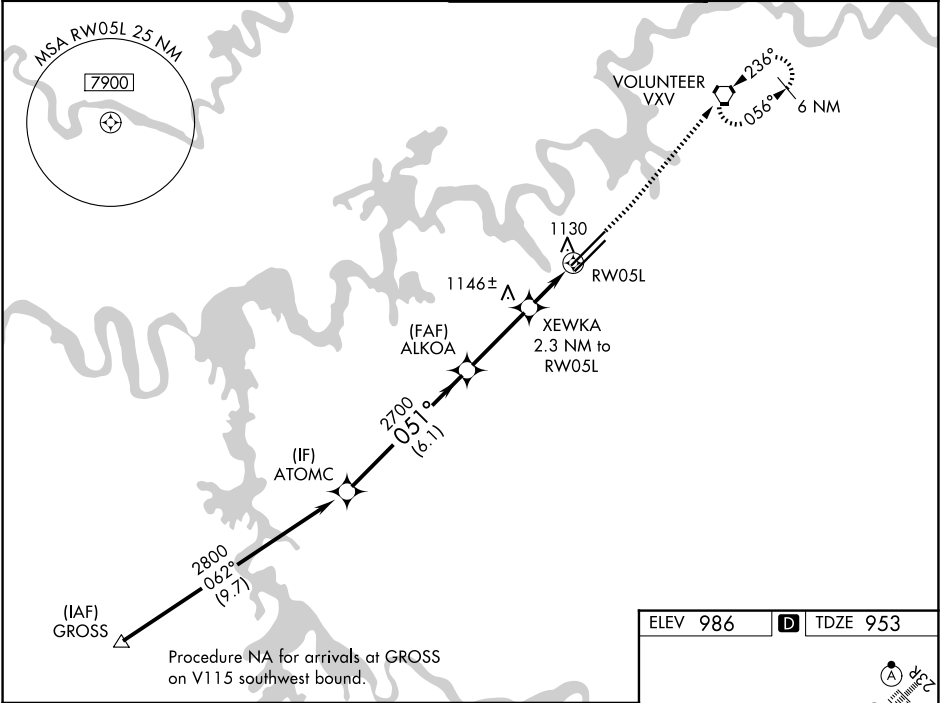

ELEV 986		D TDZE 953	
ATOMIC		ALKOE	
2800		2700	
GP 3.00°		1700	
TCH 55		1.2 NM to RWY 5L	
6.1 NM		3.1 NM	
1.1 NM		1.2 NM	
CATEGORY	A	B	C
LPV DA*	1153/24		200 (200-½)
LNAV/VNAV DA	1291/26		338 (400-½)
LNAV MDA	1380/24	427 (400-½)	1380/40 427 (400-¾)
CIRCLING	1500-1 514 (600-1)	1560-1 574 (600-1)	1660-2 674 (700-2) 1900-3 914 (1000-3)

TWR

1500

1000 X 1.50

800 X 1.50

0.8% UP

0.4% DOWN

0.3% UP

0.51°

HIRL Rwy 5L-23R and 5R-23L

REIL Rwy 5R and 23L

TDZL/RCLS Rwy 23R