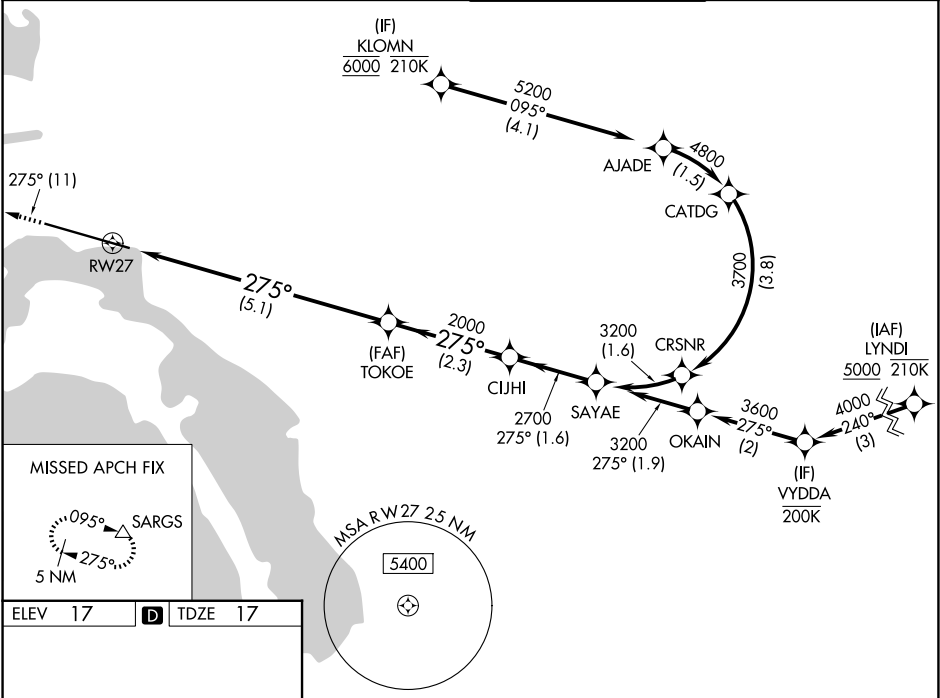


APP CRS	Rwy Ldg	7591
275°	TDZE	17
	Apt Elev	17


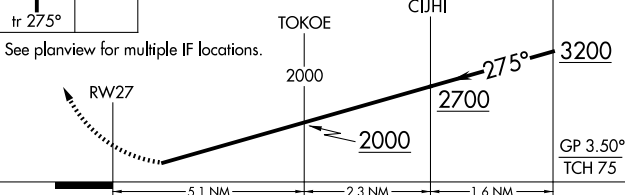
RNAV (RNP) Z RWY 27
SAN DIEGO INTL (SAN)

RNP AR APCH - GPS. Authorization required. From KLOMN: RF.	MALS 	MISSED APPROACH: Climb to 2500 on track 275° to SARGS and hold.
 For uncompensated Baro-VNAV systems, procedure NA below 5°C or above 44°C. For inop ALS, increase RNP 0.30 all Cats visibility to 2 1/2 SM. Straight-in Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.		

D-ATIS 134.8	SOCAL APP CON 119.6 363.1 (W) 124.35 279.625 (E)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9
-----------------	--	----------------------------------	------------------



ELEV 17		TDZE 17
---------	---	---------

	2500 tr 275° SARGS VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 66).									
	See planview for multiple IF locations.									
	<table><tr><td></td><td>5.1 NM</td><td>2.3 NM</td><td>1.6 NM</td><td></td></tr></table>						5.1 NM	2.3 NM	1.6 NM	
		5.1 NM	2.3 NM	1.6 NM						
	CATEGORY	A	B	C	D					
RNP 0.11 DA	624-1½ 607 (700-1½)									
RNP 0.30 DA	789-2 772 (800-2)									
AUTHORIZATION REQUIRED										

SW-3, 06 AUG 2026 to 03 SEP 2026

SW-3, 06 AUG 2026 to 03 SEP 2026