


DEP CON	RADAR required	[USN]	Rwy	Knots	60	120	180	240	300	360
125.55 282.325			3L/3R	(a) V/V(fpm)	325	650	975	1300	1625	1950
SAN DIEGO RADIO			8	(b) V/V(fpm)	300	600	900	1200	1500	1800
122.6			26	(c) V/V(fpm)	300	600	900	1200	1500	1800

- Minimum Climb Rate
- (a) to 1700
 - (b) to 1900
 - (c) to 3300

TOP ALTITUDE:
ASSIGNED BY ATC

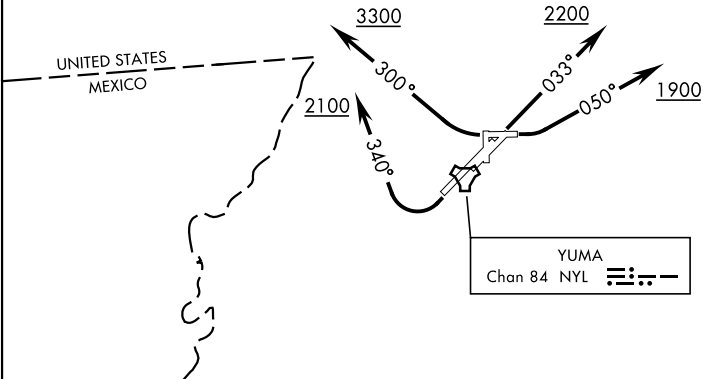

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWY 3L/3R: Climb on heading 033° to 2200 thence...
 - TAKEOFF RWY 8: Climbing left turn heading 050° to 1900 thence...
 - TAKEOFF RWY 21L/21R: Climbing right turn heading 340° to 2100 thence...
 - TAKEOFF RWY 26: Climbing right turn heading 300° to 3300 thence...
- ...expect RADAR vectors to first enroute navaid/fix. Expect clearance to requested altitude/flight level ten minutes after departure.

SW-4, 06 AUG 2026 to 03 SEP 2026

SW-4, 06 AUG 2026 to 03 SEP 2026