


LOC I-SBD 109.3	APP CRS 057°	Rwy Ldg TDZE 1103 Apt Elev 1159
---------------------------	------------------------	---

ILS or LOC Z RWY 6
SAN BERNARDINO INTL (SBD)

⚠ Circling NA northwest of Rwy 6-24. When local altimeter setting not received, use Ontario altimeter setting and increase DA to 1426 feet and all visibilities ¼ SM; increase all MDA 80 feet and S-LOC Cats C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 2000 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.
* Missed approach requires minimum climb of 340 feet per NM to 4000; if unable to meet climb gradient, see LOC Y RWY 6.

D-ATIS 124.175	SOCAL APP CON 127.0 318.2	SAN BERNARDINO TOWER ★ 119.45 (CTAF) 0	GND CON 121.8	UNICOM 122.975
--------------------------	-------------------------------------	--	-------------------------	--------------------------

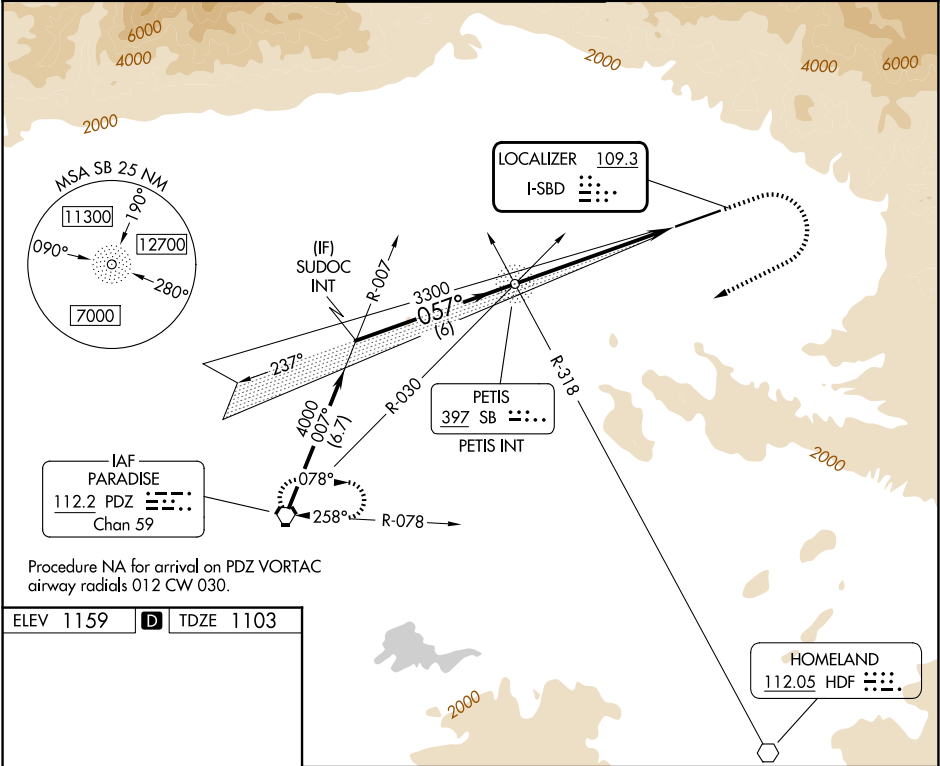

ELEV 1159 **D** TDZE 1103

HIRL Rwy 6-24
REIL Rws 6 and 24

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

TWR 0.7% UP
0.8% DOWN
10000 X 200

057°

SUDOC INT				SB NDB PETIS INT				2000	6000	PDZ
4000				3118				↑	↷	⬡
GS 3.00° TCH 51				3300						
6 NM				6.1 NM						
CATEGORY	A			B			C			D
S-ILS 6*				1353-¾			250 (200-¾)			
S-LOC 6*	1740-1			637 (600-1)			1740-1¾ 637 (600-1¾)			
CIRCLING	1740-1			581 (600-1)			1760-1¾ 601 (700-1¾) 2640-3 1481 (1500-3)			