



APP CRS	Rwy Ldg	10526
259°	TDZE	2069
	Apt Elev	2181

RNAV (RNP) RWY 26L
HARRY REID INTL (LAS)

RNP AR APCH.		MALSF	MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to BLD VORTAC and hold. *Missed approach requires minimum climb of 255 feet per NM to 3200.	
▼ For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C.				
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0
				CPDLC

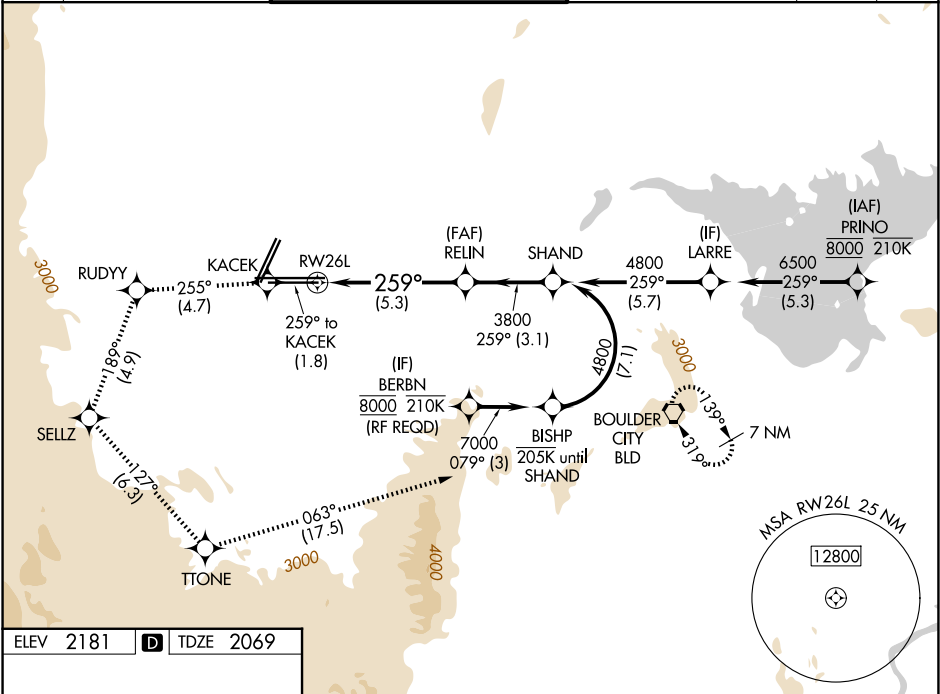

ELEV	2181	TDZE	2069
------	------	------	------

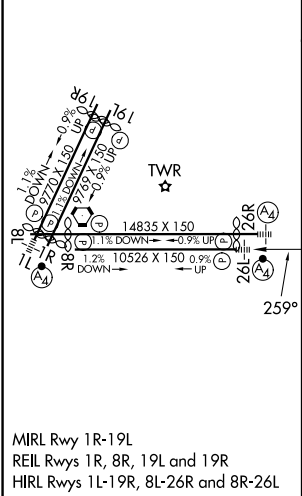

7000	KACEK	RUDYY	SELZ	TTONE	BLD
↑ tr 259°	✦ tr 255°	✦ tr 189°	✦ tr 127°	✦ tr 063°	◻
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 84). See planview for multiple IF locations.					
RELIN 3800 259° 4800 RWY26L 5.3 NM 3.1 NM GP 3.00° TCH 60					
CATEGORY	A	B	C	D	
RNP 0.30 DA*	2450-7/8 381 (300-7/8)				
RNP 0.30 DA	2502-1 433 (400-1)				
AUTHORIZATION REQUIRED					