


WAAS CH 86299 W25A	APP CRS 256°	Rwy Ldg TDZE Apt Elev	5500 44 45
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 25

OXNARD (OXR)

RNP APCH - GPS.	MALSF	MISSED APPROACH: Climb to 2000 direct PEWKI and on track 239° to SQUID and hold.
⚠ Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 440 feet, LNAV/VNAV DA to 437 feet. Increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.		

ATIS 118.05	POINT MUGU APP CON* 124.7 335.5	OXNARD TOWER* 134.95 (CTAF) 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

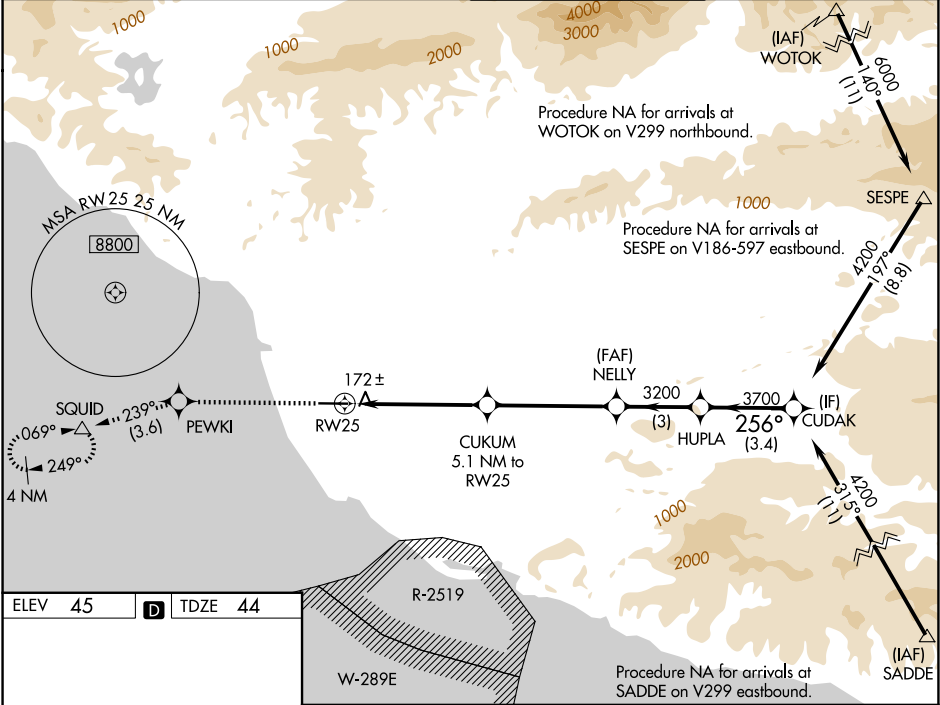

ELEV 45	D	TDZE 44
2000	PEWKI	SQUID
↑	tr 239°	△
CUKUM 5.1 NM to RW25		
RW25		
1.3 NM		
1.3 NM		
3.8 NM		
4.6 NM		
3 NM		
3.4 NM		
CATEGORY	A	B
LPV DA	424-1 380 (400-1)	
LNAV/VNAV DA	421-1 377 (400-1)	
LNAV MDA	520-1 476 (500-1)	520-1 476 (500-1 3/8)
CIRCLING	520-1 475 (500-1)	700-1 760-2 655 (700-1 3/4) 715 (800-2 1/4)
REIL Rwy 7		
MIRL Rwy 7-25		

SW-3, 06 AUG 2026 to 03 SEP 2026

SW-3, 06 AUG 2026 to 03 SEP 2026