


ATIS ★ 133.475 352.0	SHL-903 [USN]	Rwy	Knots	60	120	180	240	300	360
CLNC DEL		24L/R	V/V(fpm)	780	1560	2340	3120	3900	4680

ATC Climb Rate to 2000

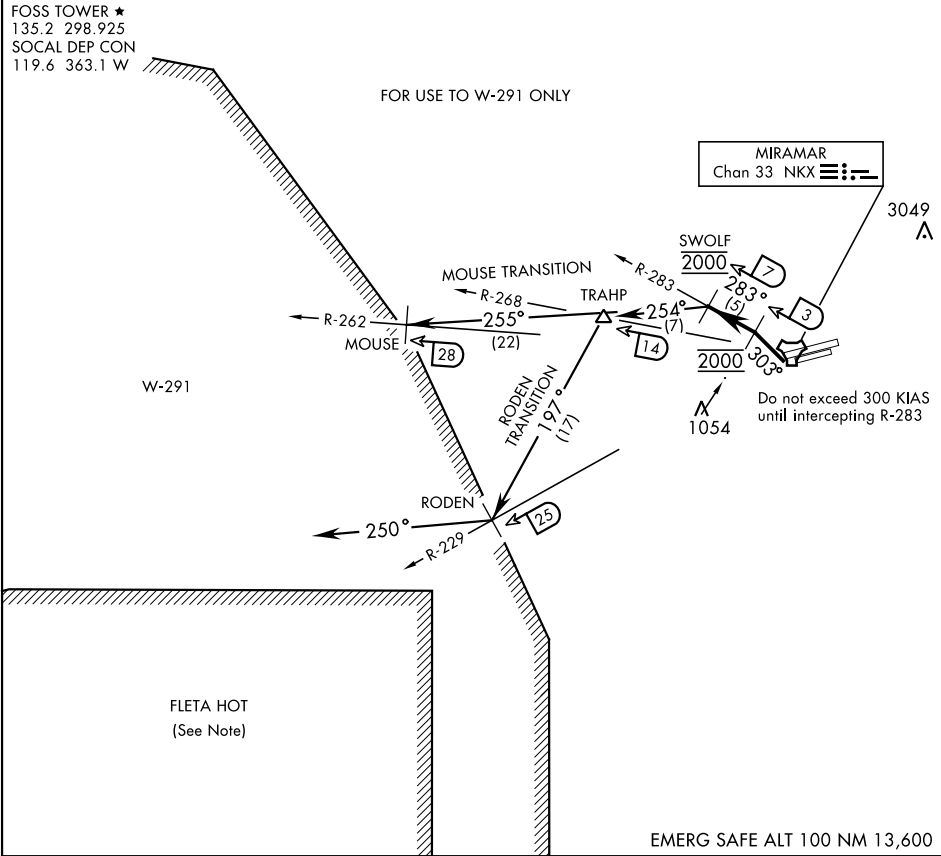

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 24L/R: Climbing right turn to 2000 via heading 303° to intercept and proceed via NKX TACAN R-283 to SWOLF. Complete turn within NKX 2 DME. Cross NKX R-283/3 DME at 2000 mandatory. Maintain 2000 at SWOLF mandatory. Thence...

MOUSE TRANSITION (SWOLF9 • MOUSE): Turn left heading 255° to intercept NKX R-262 at MOUSE. Maintain 2000 for entry into W-291.

(Continued on next page)

SHL-903 [USN]

DEPARTURE ROUTE DESCRIPTION
(Continued)

RODEN TRANSITION (SWOLF9 • RODEN): Turn left heading 254 °to intercept NKX R-268 at TRAHP. Then turn left heading 197° to intercept NKX R-229 at RODEN. Maintain 2000 for entry into W-291 via heading 250°.

- NOTE:
- (1) FLETA HOT-ACTIVE FIRING AREA (DANGER, REMAIN CLEAR).
 - (2) ALL AIRCRAFT SHOULD MAINTAIN LAST ASSIGNED HEADING/RADIAL AND ALTITUDE TO AVOID INBOUND MILITARY OR CIVIL AIRCRAFT AT HIGHER ALTITUDES!

SW-3, 06 AUG 2026 to 03 SEP 2026

SW-3, 06 AUG 2026 to 03 SEP 2026