

LOC/DME I-SGU	APP CRS	Rwy Ldg	9300
110.9	198°	TDZE	2884
Chan 46		Apt Elev	2884

LDA RWY 19
ST GEORGE RGNL (SGU)


V NA
8 -5°C

DME required. For inop ALS, increase S-LDA/GS 19 all Cats visibility to ½ SM.

MALSR

MISSED APPROACH: Climb to 4200 then climbing right turn to 9800 on heading 354° and UTI VOR/DME R-314 to HUNKU INT/ MMM 42.1 DME and hold, continue climb-in-hold to 9800.

AWOS-3PT 135,075	LOS ANGELES CENTER 124.2 343.6	UNICOM 123,075 (CTAF) 1
---------------------	-----------------------------------	-----------------------------------

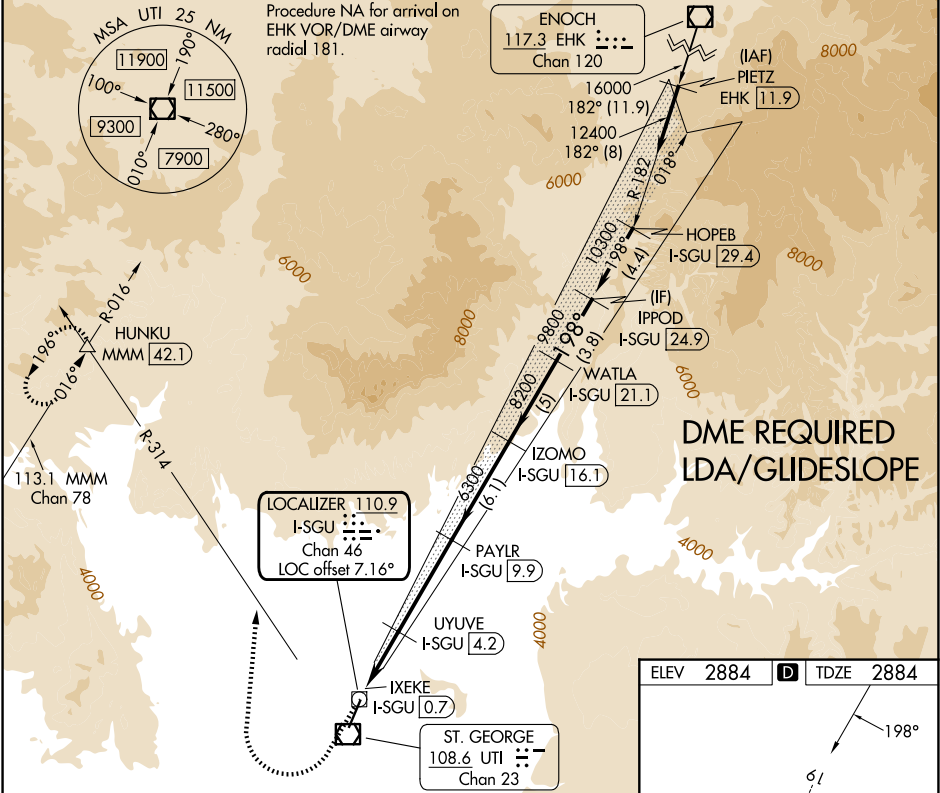

4200 9800


↑ hdg R-314

HUNKU

Use I-SGU DME when on the localizer course.

*LDA only.	UYUVE I-SGU [4.2]	PAYLR I-SGU [9.9]	IZOMO I-SGU [16.1]	WATLA I-SGU [21.1]	IPPOD I-SGU [24.9]
IXEKE I-SGU [0.7]	4300*	6300	8200	9800	10300
LOC unusable inside 0.7 DME.		GS 3.10° TCH 55			
0.7	2.3 NM	1.2 NM	5.7 NM	6.1 NM	5 NM

CATEGORY	A	B	C	D
S-LDA/GS 19	3170-½ 286 (300-½)			
S-LDA 19	3940-¾ 1056 (1100-¾)	3940-1 1056 (1100-1)	3940-2½ 1056 (1100-2½)	
CIRCLING	3940-1¼ 1056 (1100-1¼)	3940-1½ 1056 (1100-1½)	3940-3 1056 (1100-3)	4660-3 1776 (1800-3)

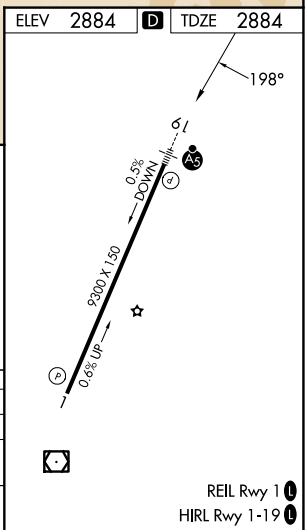

SW-4, 06 AUG 2026 to 03 SEP 2026

SW-4, 06 AUG 2026 to 03 SEP 2026