

ATLANTA, GEORGIA

AL-26 (FAA)

ILS PRM RWY 10
(CLOSE PARALLEL)

LOC/DME	I-OMO	APP CRS	Rwy Ldg	9000
111.55		095°	TDZE	1000
Chan 52 (Y)			Apt Elev	1026

HARTSFIELD/JACKSON ATLANTA INTL (ATL)




DME or RADAR required. RNP APCH - GPS from YINNZ.

Simultaneous approach authorized. Procedure NA when glide slope not available (ILS procedures only). Dual VHF Comm required. See additional requirements on AAUP. Localizer not suitable for electronic rollout guidance.

ALSF-2

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 120° and AHN R-222 to IHOPE/AHN 36 DME and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER				ALL	GND CON		ALL
119.65	134.725 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28 RWYS	(8L-26R, 8R-26L)	(9L-27R, 9R-27L)	10-28 RWYS
		119.1	125.325	123.85	119.3	119.5 254.4	121.9	121.75	121.65 254.4
		PRM 133.425							

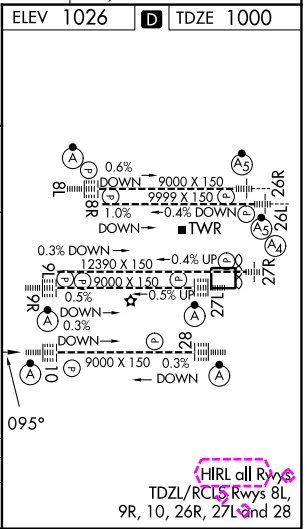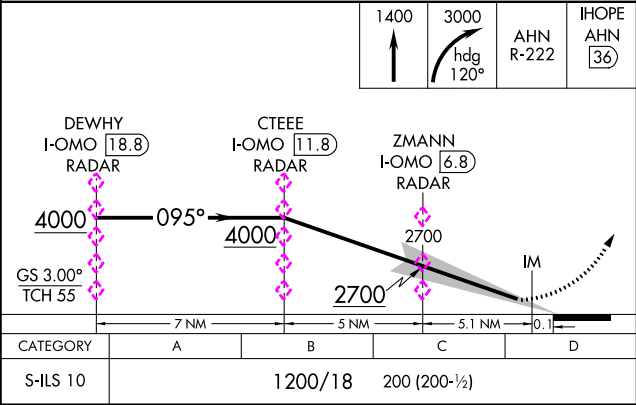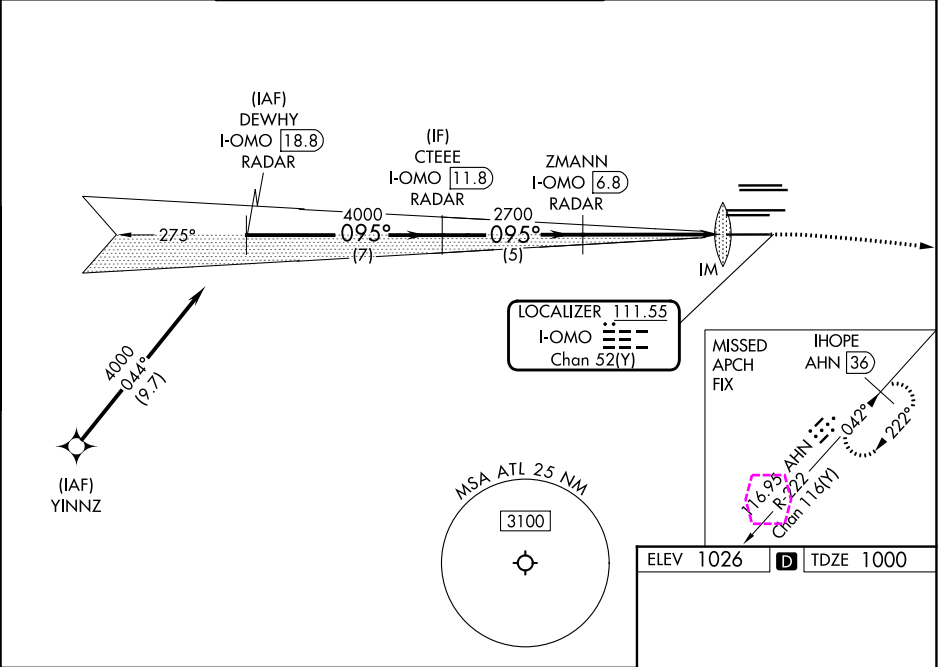

ATLANTA, GEORGIA

AL-26 (FAA)

ILS PRM RWY 10
(CLOSE PARALLEL)

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

LOC/DME	I-OMO	APP CRS	Rwy Ldg	9000
111.55		095°	TDZE	1000
Chan 52 (Y)			Apt Elev	1026

DME or RADAR required. RNP APCH - GPS from YINNZ.

Simultaneous approach authorized. Procedure NA when glide slope not available (ILS procedures only). Dual VHF Comm required. See additional requirements on AAUP. Localizer not suitable for electronic rollout guidance.

ALSF-2

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on heading 120° and AHN R-222 to IHOPE/AHN 36 DME and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER				ALL	GND CON	ALL
119.65	134.725 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28 RWYS	(8L-26R, 8R-26L) (9L-27R, 9R-27L) 10-28	10-28 RWYS
		119.1	125.325	123.85	119.3	119.5 254.4	121.9	121.75 121.65 254.4
		PRM 133.425						

