

(BHM8.BHM) 24081


BIRMINGHAM EIGHT DEPARTURE

BIRMINGHAM-SHUTTLESWORTH INTL (BHM)
AL-50 (FAA)
BIRMINGHAM, ALABAMA

ATIS
119.4 270.1
CLNC DEL
125.675 305.2
BIRMINGHAM TOWER
119.9 317.725

TOP ALTITUDE:
4000

NOTE: RADAR required.
NOTE: Use frequency depicted within
sector where FIX/NAVAID
for your route is located.

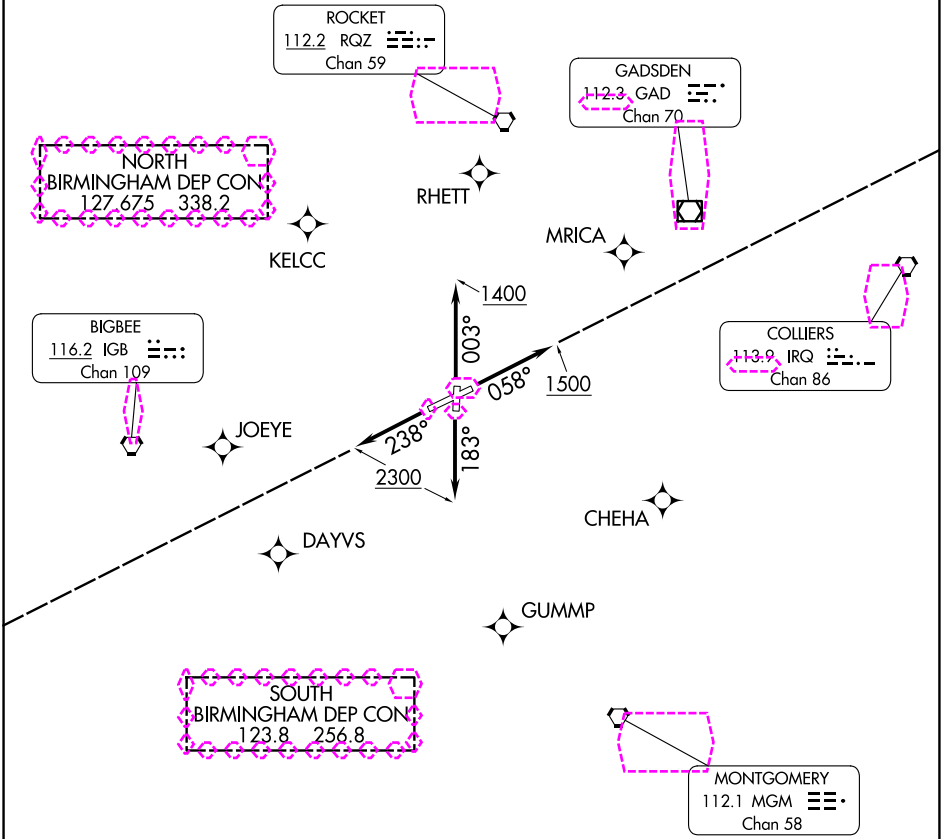

TAKEOFF MINIMUMS

- Rwy 6: 300-2 with minimum climb of 285' per NM to 1800
or standard with minimum climb of 435' per NM to 1300.
- Rwy 18: 600-3 with minimum climb of 225' per NM to 1300
or standard with minimum climb of 455' per NM to 1500.
- Rwy 24: Standard with minimum climb of 280' per NM to 1400.
- Rwy 36: 300-2¼ or standard with minimum climb of 565' per
NM to 1000.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

BIRMINGHAM EIGHT DEPARTURE

(BHM8.BHM) 22APR21

BIRMINGHAM, ALABAMA
BIRMINGHAM-SHUTTLESWORTH INTL (BHM)

(BHM8.BHM) 26246


BIRMINGHAM EIGHT DEPARTURE

BIRMINGHAM-SHUTTLESWORTH INTL (BHM)
AL-50 (FAA) BIRMINGHAM, ALABAMA

ATIS
119.4 270.1
CLNC DEL
125.675 305.2
BIRMINGHAM TOWER
119.9 317.725

TOP ALTITUDE:
4000

NOTE: RADAR required.
NOTE: Use frequency depicted within
sector where FIX/NAVAID
for your route is located.

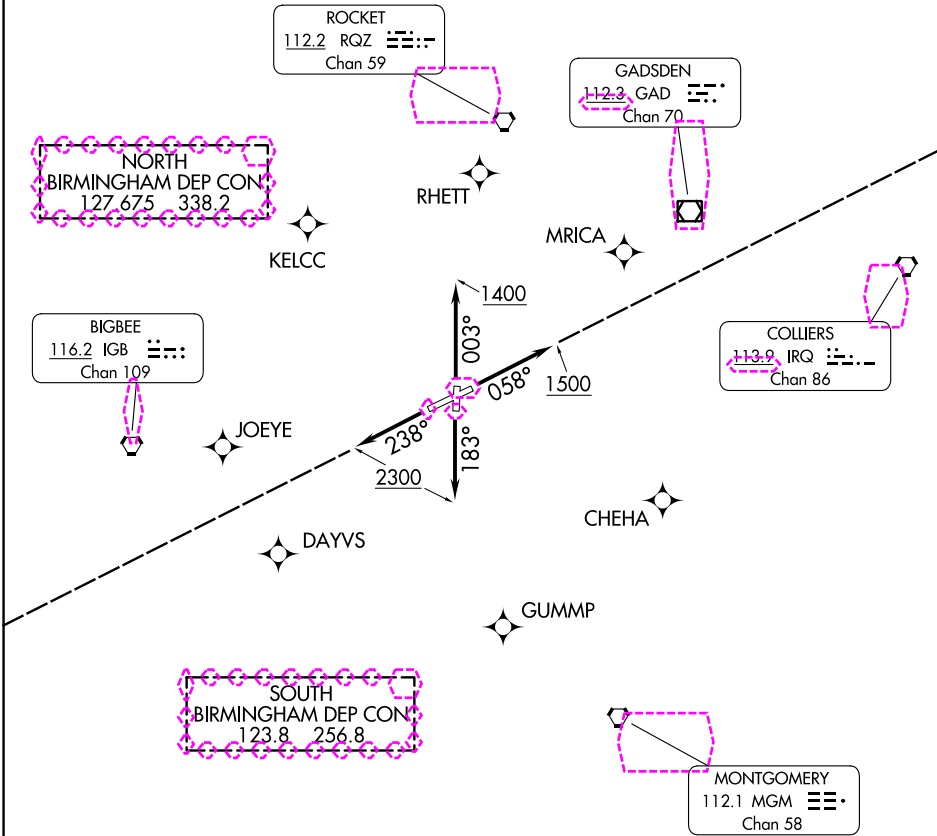

TAKEOFF MINIMUMS

- Rwy 6: 300-2 with minimum climb of 285' per NM to 1800
or standard with minimum climb of 435' per NM to 1300.
- Rwy 18: 600-3 with minimum climb of 225' per NM to 1300
or standard with minimum climb of 455' per NM to 1500.
- Rwy 24: Standard with minimum climb of 280' per NM to 1400.
- Rwy 36: 300-2¼ or standard with minimum climb of 565' per
NM to 1000.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

BIRMINGHAM EIGHT DEPARTURE

(BHM8.BHM) 22APR21

BIRMINGHAM, ALABAMA
BIRMINGHAM-SHUTTLESWORTH INTL (BHM)

SE-4, 03 SEP 2026 to 01 OCT 2026

SE-4, 03 SEP 2026 to 01 OCT 2026