

CHARLOTTE, NORTH CAROLINA




AL-78 (FAA)

26190

LOC/DME I-XUU 110.15 Chan 38(Y)	APP CRS 003°	Rwy Ldg TDZE 744 Apt Elev 748
---	------------------------	---

ILS RWY 1L (CAT II & III)
CHARLOTTE/DOUGLAS INTL (CLT)

DME or RADAR required. RADAR required for procedure entry.		ALSIF-2 	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 280° and on BZM VOR/DME R-184 to BUDKE/BZM 26.5 DME/RADAR and hold.
Simultaneous approach authorized.			
D-ATIS 121.15	CHARLOTTE APP CON 128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	257.2 (180°-359°) 307.8 (360°-179°)	CHARLOTTE TOWER 118.1 257.8 (18L-36R) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)
			GND CON 121.8 348.6 (W) 121.9 348.6 (E)

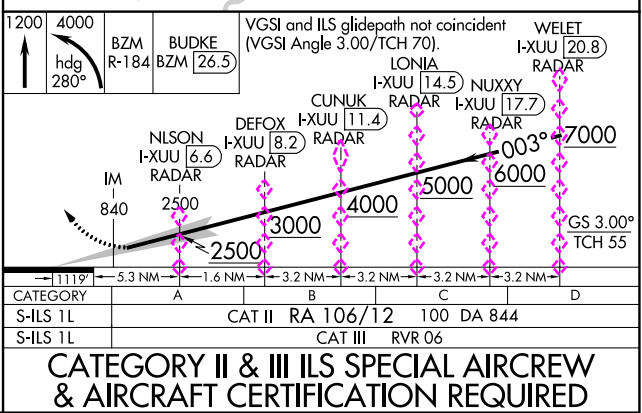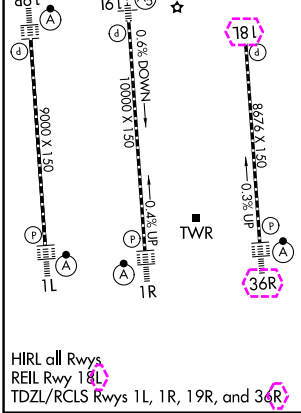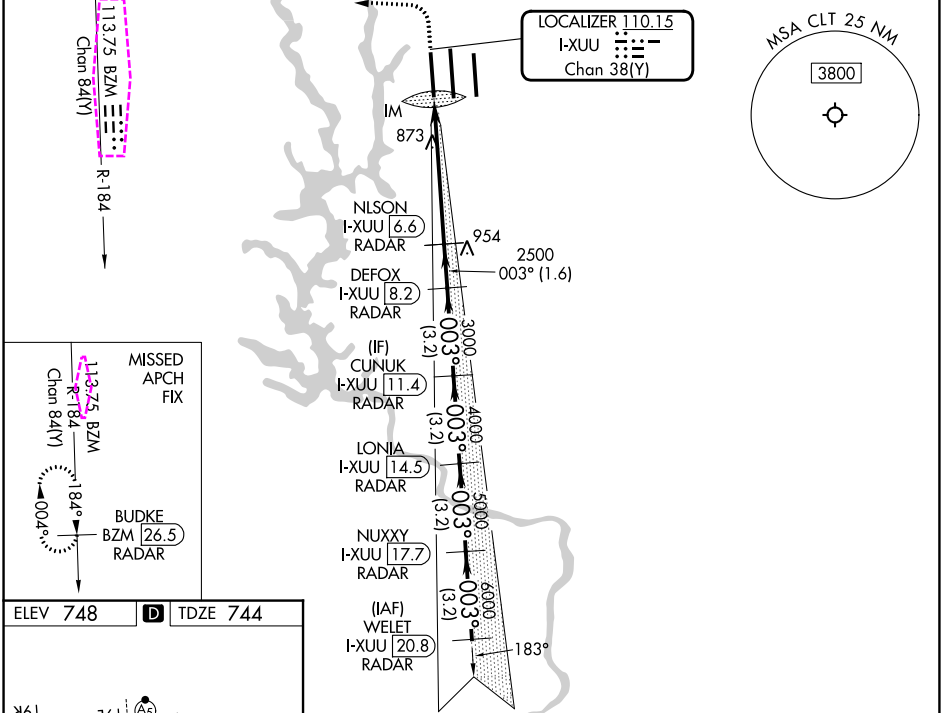

CHARLOTTE, NORTH CAROLINA
Amdt 2 14MAY26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
ILS RWY 1L (CAT II & III)

LOC/DME I-XUU <u>110.15</u> Chan 38 (Y)	APP CRS 003°	Rwy Ldg 9000 TDZE 744 Apt Elev 748
---	------------------------	---

ILS RWY 1L (CAT II & III)
CHARLOTTE/DOUGLAS INTL (CLT)

DME or RADAR required. RADAR required for procedure entry.			MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 280° and on BZM VOR/DME R-184 to BUDKE/BZM 26.5 DME/RADAR and hold.	
 Simultaneous approach authorized.				
D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER	
	128.325 (001°-119°)	257.2 (180°-359°)	118.1 257.8 (18-36)	GND CON
121.15	120.05 (120°-295°)	307.8 (360°-179°)	126.4 257.8 (11R-19L)	121.8 348.6 (W)
	134.75 (296°-360°)		133.35 257.8 (11L-19R)	121.9 348.6 (E)

