

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)



26190

APP CRS	Rwy Ldg 10000
183°	TDZE 742
	Apt Elev 748

RNAV (RNP) Z RWY 19L
CHARLOTTE/DOUGLAS INTL (CLT)


RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3000 direct DENNE and hold.
For uncompensated Baro-VNAV systems, procedure NA below -7°C or above 54°C. Simultaneous approach authorized.		

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 257.2 (180°-359°) 120.05 (120°-295°) 307.8 (360°-179°) 134.75 (296°-360°)	118.1 257.8 (18L-36R) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

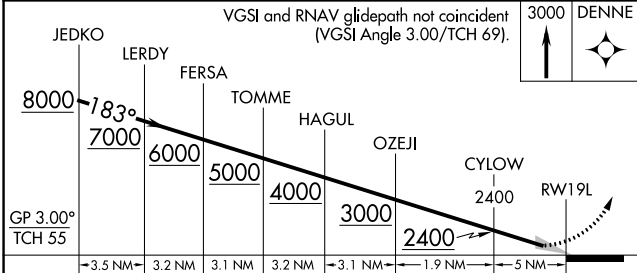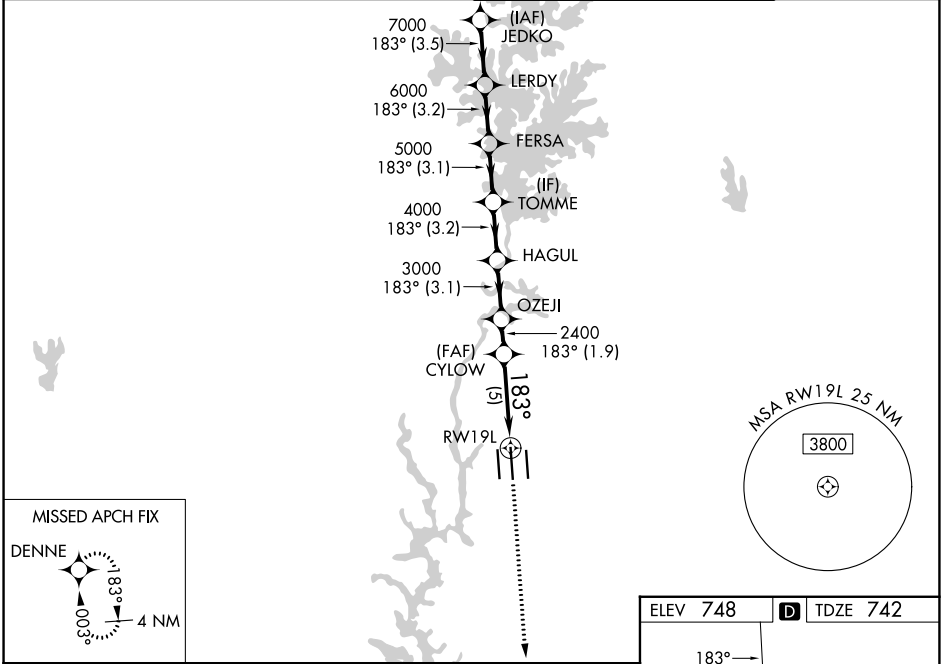

CATEGORY	A	B	C	D
RNP 0.11 DA	1067/26	325 (400-½)		
RNP 0.30 DA	1177/40	435 (500-¾)		

AUTHORIZATION REQUIRED

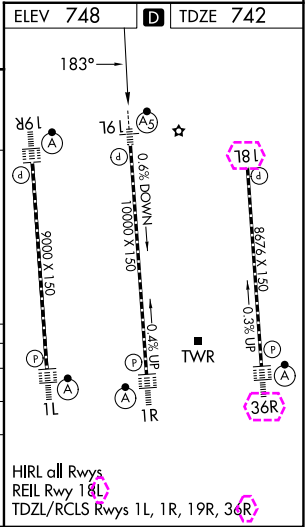

CHARLOTTE, NORTH CAROLINA
Orig 09JUL26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (RNP) Z RWY 19L

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26246




APP CRS	Rwy Ldg 10000
183°	TDZE 742
	Apt Elev 748

RNAV (RNP) Z RWY 19L

CHARLOTTE/DOUGLAS INTL (CLT)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3000 direct DENNE and hold.
For uncompensated Baro-VNAV systems, procedure NA below -7°C or above 54°C. Simultaneous approach authorized.		

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 257.2 (180°-359°) 120.05 (120°-295°) 307.8 (360°-179°) 134.75 (296°-360°)	118.1 257.8 (18-36) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

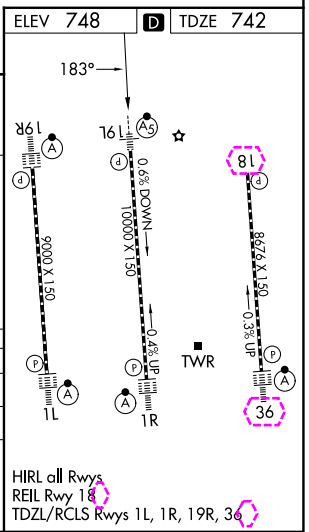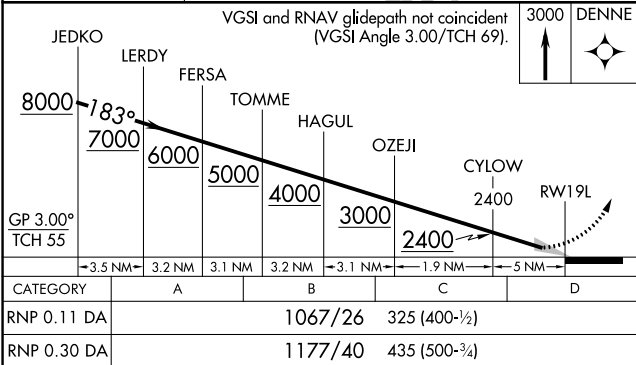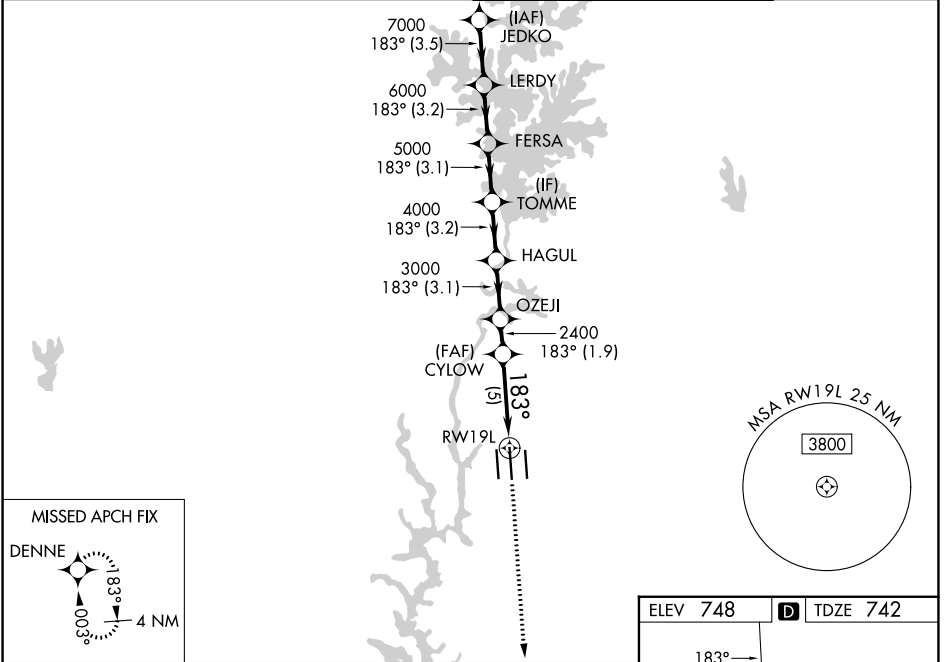

CATEGORY		A	B	C	D
RNP 0.11 DA		1067/26		325 (400-½)	
RNP 0.30 DA		1177/40		435 (500-¾)	

AUTHORIZATION REQUIRED

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, 36

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026