

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26190

APP CRS	Rwy Ldg	10000
003°	TDZE	707
	Apt Elev	748

RNAV (RNP) Z RWY 1R

CHARLOTTE/DOUGLAS INTL (CLT)



RNP AR APCH - GPS.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -7°C or above 54°C. For inop ALS, increase RNP 0.30 visibility all Cats to 1% SM.

ALS-2

MISSED APPROACH: Climb to 3000 on track 003° to TOMME and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 257.8 (18L-36R)		121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4 257.8 (1R-19L)		121.9 348.6 (E)
	134.75 (296°-360°)		133.35 257.8 (1L-19R)		

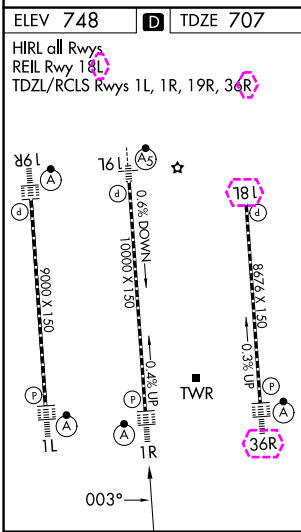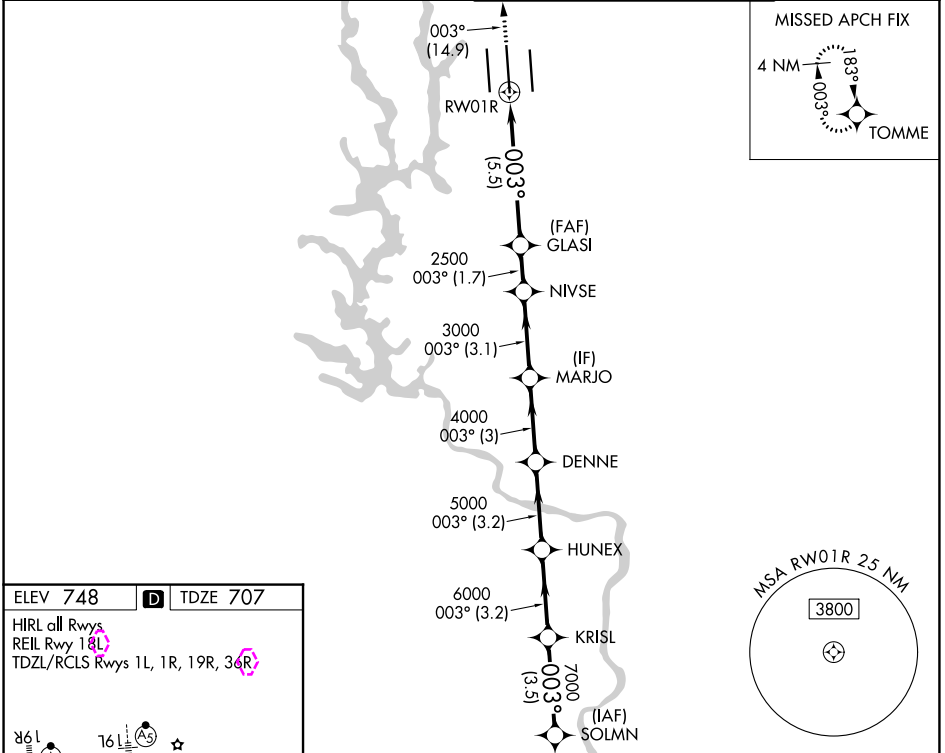

3000 ↑	tr 003°	TOMME ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).					SOLMN																		
<table><tr><td>GLASI</td><td>NIVSE</td><td>MARJO</td><td>DENNE</td><td>HUNEX</td><td>KRISL</td><td colspan="2">003°</td><td>8000</td></tr><tr><td>2500</td><td>3000</td><td>4000</td><td>5000</td><td>6000</td><td>7000</td><td colspan="2"></td><td></td></tr></table>									GLASI	NIVSE	MARJO	DENNE	HUNEX	KRISL	003°		8000	2500	3000	4000	5000	6000	7000			
GLASI	NIVSE	MARJO	DENNE	HUNEX	KRISL	003°		8000																		
2500	3000	4000	5000	6000	7000																					
<table><tr><td colspan="2">RW01R</td><td>5.5 NM</td><td>1.7 NM</td><td>3.1 NM</td><td>3 NM</td><td>3.2 NM</td><td>3.2 NM</td><td>3.5 NM</td></tr><tr><td colspan="2"></td><td>A</td><td></td><td>B</td><td></td><td>C</td><td></td><td>D</td></tr></table>									RW01R		5.5 NM	1.7 NM	3.1 NM	3 NM	3.2 NM	3.2 NM	3.5 NM			A		B		C		D
RW01R		5.5 NM	1.7 NM	3.1 NM	3 NM	3.2 NM	3.2 NM	3.5 NM																		
		A		B		C		D																		
CATEGORY																										
RNP 0.11 DA		1134/40 427 (400-¾)																								
RNP 0.30 DA		1180/50 473 (500-1)																								
AUTHORIZATION REQUIRED																										

CHARLOTTE, NORTH CAROLINA
Orig 09JUL26

CHARLOTTE/DOUGLAS INTL (CLT)
35°13'N-80°57'W
RNAV (RNP) Z RWY 1R

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26246

APP CRS	Rwy Ldg	10000
003°	TDZE	707
	Apt Elev	748

RNAV (RNP) Z RWY 1R

CHARLOTTE/DOUGLAS INTL (CLT)


RNP AR APCH - GPS.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -7°C or above 54°C. For inop ALS, increase RNP 0.30 visibility all Cats to 1% SM.

ALSF-2

MISSED APPROACH: Climb to 3000 on track 003° to TOMME and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 257.8 (18-36)		121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4 257.8 (1R-19L)		121.9 348.6 (E)
	134.75 (296°-360°)		133.35 257.8 (1L-19R)		

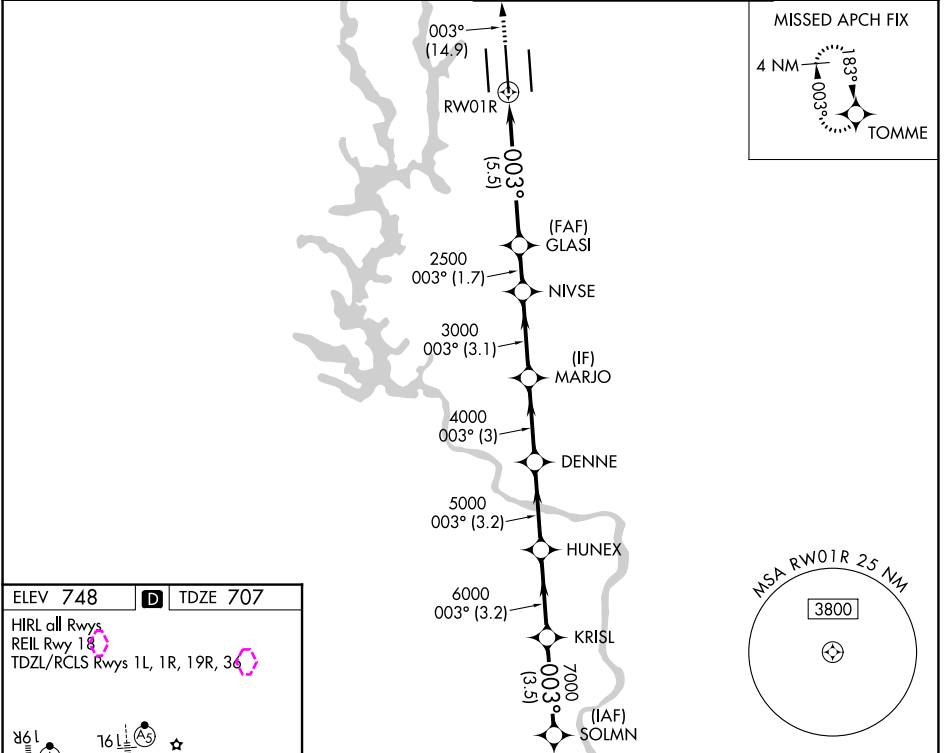

ELEV 748 D TDZE 707

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, 36

3000 ↑	tr 003°	TOMME 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).					SOLMN
CATEGORY		A		B		C		D
RNP 0.11 DA		1134/40		427 (400-¾)				
RNP 0.30 DA		1180/50		473 (500-1)				
AUTHORIZATION REQUIRED								

CHARLOTTE, NORTH CAROLINA
Orig 09JUL26

CHARLOTTE/DOUGLAS INTL (CLT)
35°13'N-80°57'W
RNAV (RNP) Z RWY 1R

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026