

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)


26190

WAAS CH 49247 W19B	APP CRS 183°	Rwy Ldg 10000 TDZE 742 Apt Elev 748
--	------------------------	--


RNAV (GPS) Y RWY 19L

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS.			MALSR	MISSED APPROACH: Climb to 3000 direct DENNE and hold.	
▼ ▲ Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and increase LNAV Cats C/D visibility to 1 3/8 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.					
D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325	(001°-119°)	257.2	(180°-359°)	121.8 348.6 (W) 121.9 348.6 (E)
	120.05	(120°-295°)	307.8	(360°-179°)	
	134.75	(296°-360°)			
			118.1	257.8 (18L-36R)	
			126.4	257.8 (1R-19L)	
			133.35	257.8 (1L-19R)	

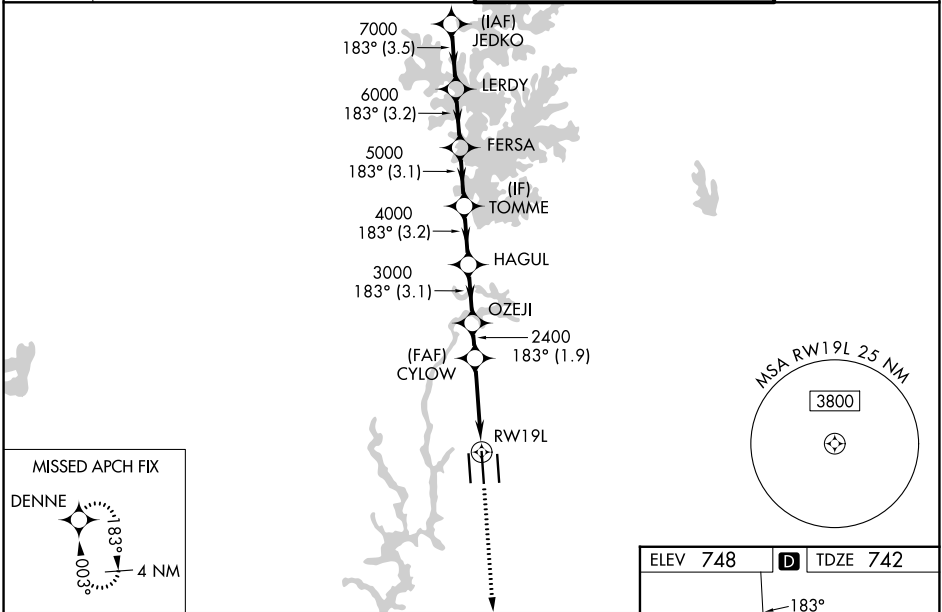

JEDKO		LERDY		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 69).		3000		DENNE	
8000		7000		6000		5000		4000	
TOMME		HAGUL		OZEJI		CYLOW		1.3 NM to RW19L	
GP 3.00° TCH 55		-3.5 NM		3.2 NM		3.1 NM		3.2 NM	
		-3.1 NM		-1.9 NM		3.8 NM		1.3	
CATEGORY		A		B		C		D	
LPV DA*		942/24		200 (200-½)					
LNAV/ VNAV DA		1144/40		402 (400-¾)					
LNAV MDA		1220/24 478 (500-½)		1220/50 478 (500-1)					
CIRCLING		1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)		1500-2½ 752 (800-2½)			

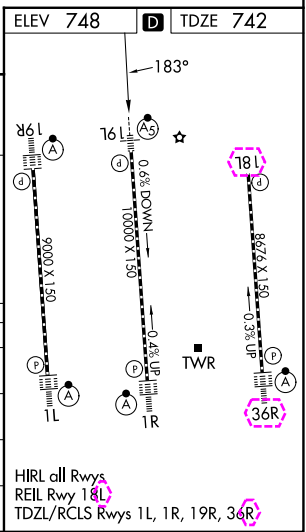

CHARLOTTE, NORTH CAROLINA
Orig 09JUL26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 19L

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)


26246

WAAS CH 49247 W19B	APP CRS 183°	Rwy Ldg 10000 TDZE 742 Apt Elev 748
--	------------------------	--

RNAV (GPS) Y RWY 19L

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 3000 direct DENNE and hold.		
▼ ▲ Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and increase LNAV Cats C/D visibility to 1 3/8 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.						
D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON	
121.15	128.325	(001°-119°)	257.2	(180°-359°)	118.1 257.8 (18-36)	121.8 348.6 (W)
	120.05	(120°-295°)	307.8	(360°-179°)	126.4 257.8 (1R-19L)	121.9 348.6 (E)
	134.75	(296°-360°)			133.35 257.8 (1L-19R)	

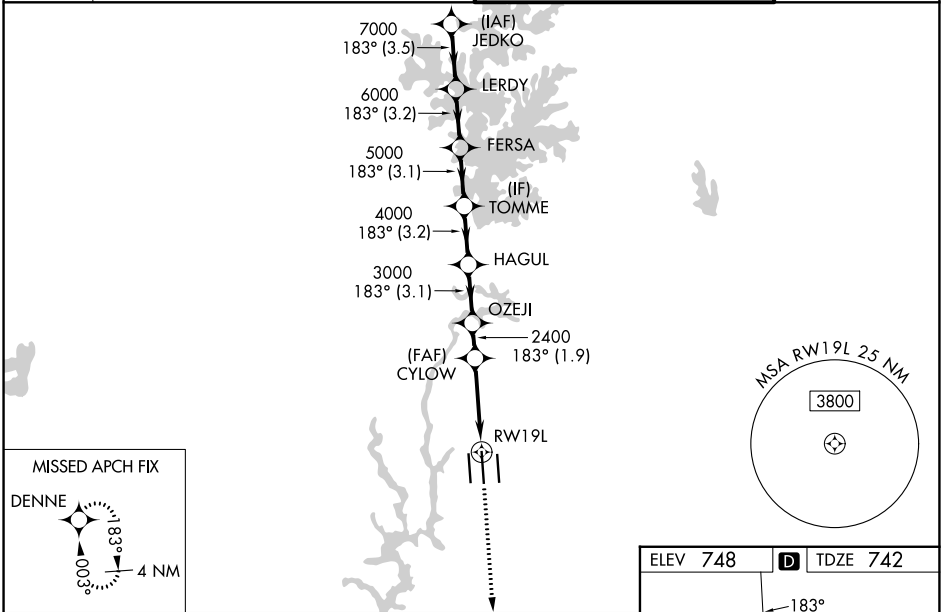

JEDKO LERDY		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 69°).		3000 DENNE
8000 783°		FERSA TOMME	HAGUL	OZEJI
7000		6000	5000	4000
GP 3.00°		3000	2400	1.3 NM to RWY19L
TCH 55		3.2 NM	3.1 NM	3.2 NM
CATEGORY		A	B	C
LPV DA*		942/24		200 (200-1/2)
LNAV/ VNAV DA		1144/40		402 (400-3/4)
LNAV MDA		1220/24	478 (500-1/2)	1220/50 478 (500-1)
CIRCLING		1380-1	632 (700-1)	1500-2 1/4 752 (800-2 1/4) 1500-2 1/2 752 (800-2 1/2)

