

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26190

WAAS CH 82415 W19D	APP CRS 183°	Rwy Ldg TDZE 744 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 19R

CHARLOTTE/DOUGLAS INTL (CLT)


RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, increase LNAV Cat C/D visibility to RVR 5500.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct STULL and hold, continue climb-in-hold to 4000.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON	
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 (18L-36R)	257.8 (1R-19L)	121.8 (W)	348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4 (1R-19L)	257.8 (1L-19R)	121.9 (E)	348.6 (E)
	134.75 (296°-360°)		133.35 (1L-19R)	257.8		

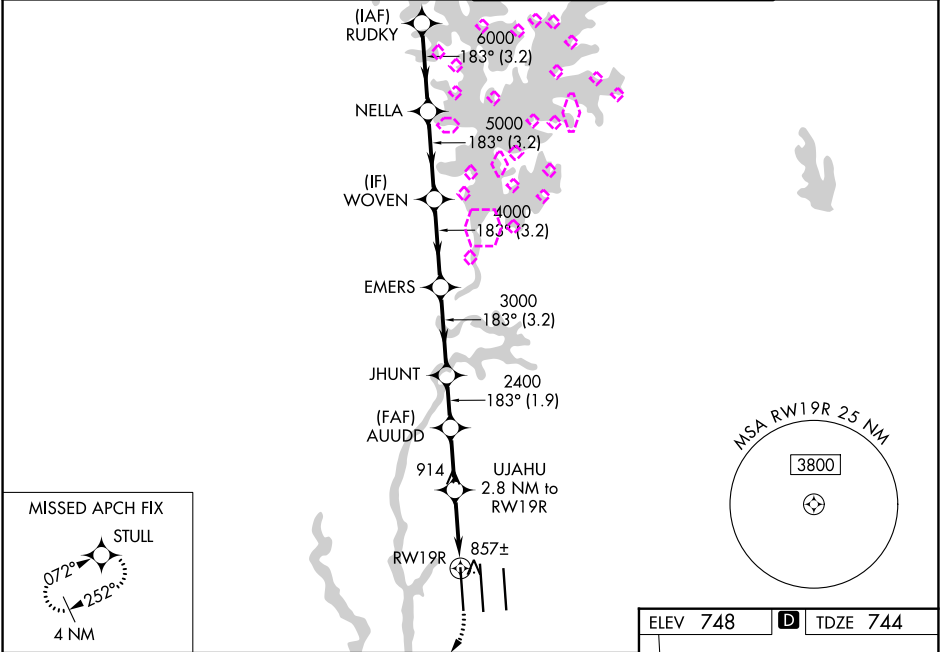

RUDKY		NELLA		VGSI and RNAV glidepath not coincident (VGSI Angle 2.80/TCH 65).		1200	4000	STULL
7000		183°		6000		5000		4000
GP 3.00°								
TCH 55								
-3.2 NM		-3.2 NM		-3.2 NM		-1.9 NM		2.2 NM
CATEGORY		A		B		C		D
LPV DA		944/18		200 (200-½)				
LNAV/ VNAV DA		1018/24		274 (300-½)				
LNAV MDA		1120/24		376 (400-½)		1120/35		376 (400-¾)
CIRCLING		1380-1		632 (700-1)		1500-2¼ 752 (800-2¼)		1500-2½ 752 (800-2½)

Diagram illustrating the RNAV glidepath and associated data for RUDKY, NELLA, WOVEN, EMERS, JHUNT, AUUDD, UJAHU, and STULL.

Key data points and distances:

- GP 3.00° TCH 55
- Distances: 3.2 NM, 1.9 NM, 2.2 NM, 1.8 NM, 1 NM
- Altitudes: 7000, 6000, 5000, 4000, 3000, 2400, 1680
- Angles: 183°, 2.8 NM to RW19R, 1 NM to RW19R
- Category: A, B, C, D
- DA (Decision Altitude): 944/18, 200 (200-½)
- VNAV DA (Vertical Navigation Decision Altitude): 1018/24, 274 (300-½)
- MDA (Minimum Descent Altitude): 1120/24, 376 (400-½), 1120/35, 376 (400-¾)
- Circling: 1380-1, 632 (700-1), 1500-2¼, 752 (800-2¼), 1500-2½, 752 (800-2½)

Visual elements include a glidepath diagram, a star symbol, and a TWR (Tower) symbol.

Diagram illustrating the RNAV glidepath and associated data for RUDKY, NELLA, WOVEN, EMERS, JHUNT, AUUDD, UJAHU, and STULL.

Key data points and distances:

- GP 3.00° TCH 55
- Distances: 3.2 NM, 1.9 NM, 2.2 NM, 1.8 NM, 1 NM
- Altitudes: 7000, 6000, 5000, 4000, 3000, 2400, 1680
- Angles: 183°, 2.8 NM to RW19R, 1 NM to RW19R
- Category: A, B, C, D
- DA (Decision Altitude): 944/18, 200 (200-½)
- VNAV DA (Vertical Navigation Decision Altitude): 1018/24, 274 (300-½)
- MDA (Minimum Descent Altitude): 1120/24, 376 (400-½), 1120/35, 376 (400-¾)
- Circling: 1380-1, 632 (700-1), 1500-2¼, 752 (800-2¼), 1500-2½, 752 (800-2½)

Visual elements include a glidepath diagram, a star symbol, and a TWR (Tower) symbol.

CHARLOTTE, NORTH CAROLINA
Amdt 3 14MAY26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT) RNAV (GPS) Y RWY 19R

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026

CHARLOTTE, NORTH CAROLINA

AL-78 (FAA)

26246

WAAS CH 82415 W19D	APP CRS 183°	Rwy Ldg TDZE 744 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 19R

CHARLOTTE/DOUGLAS INTL (CLT)


RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, increase LNAV Cat C/D visibility to RVR 5500.


ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct STULL and hold, continue climb-in-hold to 4000.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 (18-36)	257.8 (1R-19L)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4 257.8 (1R-19L)		121.9 348.6 (E)
	134.75 (296°-360°)		133.35 257.8 (1L-19R)		

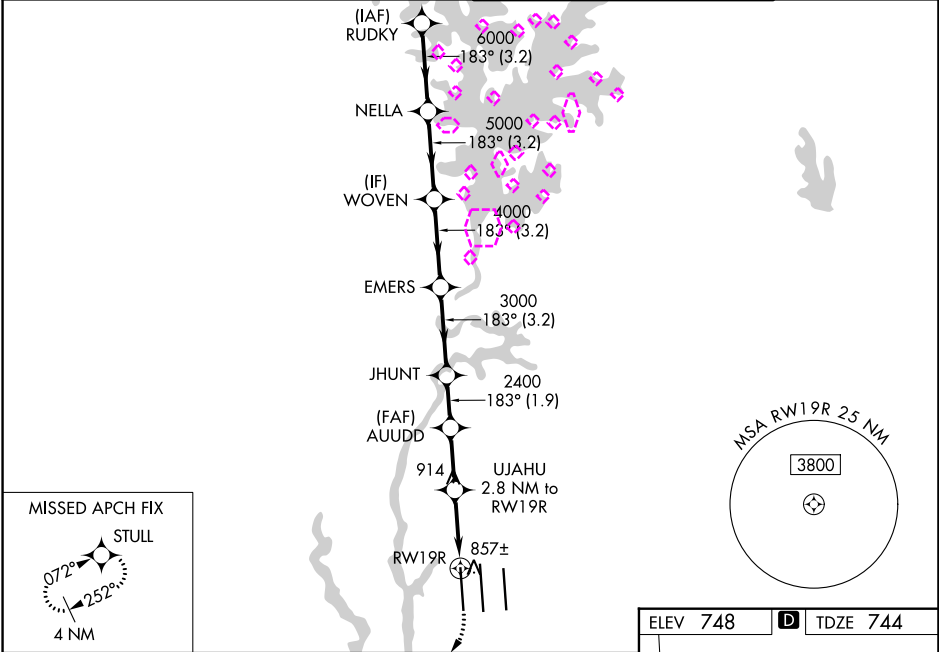

RUDKY		NELLA	VGSI and RNAV glidepath not coincident (VGSI Angle 2.80/TCH 65).		1200	4000	STULL	
7000		183°	6000	5000	4000	3000	2400	1680
GP 3.00° TCH 55								
-3.2 NM		-3.2 NM	-3.2 NM	-3.2 NM	-1.9 NM	2.2 NM	1.8 NM	1 NM
CATEGORY	A	B	C	D				
LPV DA	944/18		200 (200-½)					
LNAV/ VNAV	DA		1018/24		274 (300-½)			
LNAV MDA	1120/24	376 (400-½)	1120/35	376 (400-¾)				
CIRCLING	1380-1	632 (700-1)	1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)				

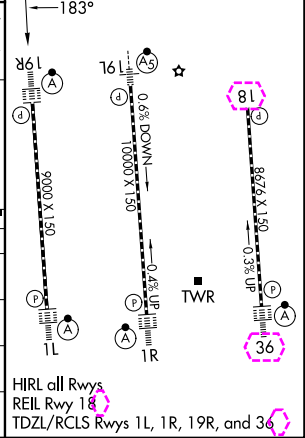

CHARLOTTE, NORTH CAROLINA
Amdt 3 14MAY26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT) RNAV (GPS) Y RWY 19R

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026