

WAAS CH 93947 W01B	APP CRS 003°	Rwy Ldg 10000 TDZE 707 Apt Elev 748
--	------------------------	--

RNAV (GPS) Y RWY 1R
CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS.	
-----------------	--

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.
▲ Circling NA at night. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LNAV Cat C/D visibility to 1 $\frac{3}{4}$ SM.

ALSF-2


MISSED APPROACH:
Climb to 3000 direct
TOMME and hold.

D-ATIS	CHARLOTTE APP CON	
121.15	128.325 (001°-119°)	257.2 (180°-359°)
	120.05 (120°-295°)	307.8 (360°-179°)
	134.75 (296°-360°)	



CHARLOTTE TOWER

118.1	257.8	(18L-36R)
126.4	257.8	(1R-19L)
133.35	257.8	(1L-19R)

GND CON
121.8 348.6 (W)
121.9 348.6 (E)

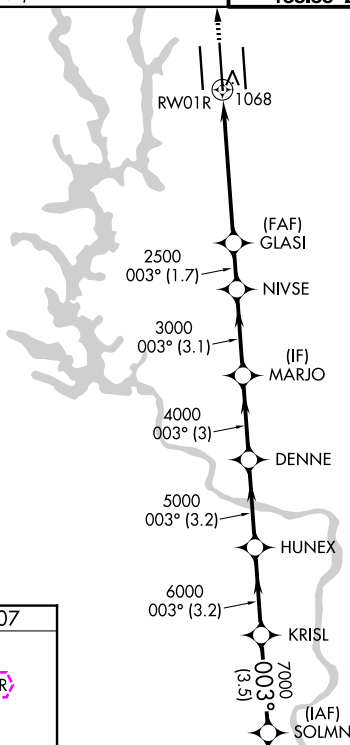



MISSED APCH FIX



ELEV 748	D	TDZE 707
----------	----------	----------

HIRL all Rwy's
REIL Rwy 18L
TDZL/RCLS Rwy's 1L, 1R, 19R, 36R

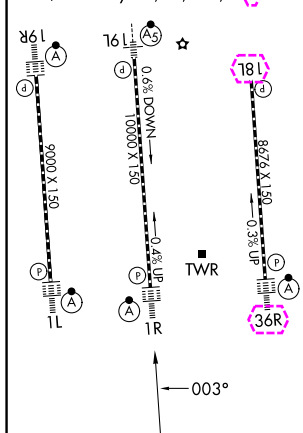

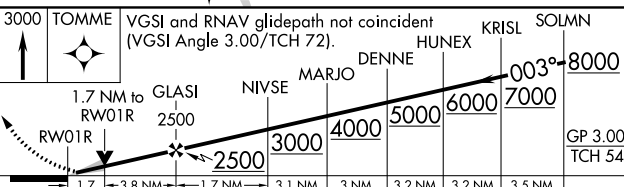3000	TOMME	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 72).										SOLMN
												8000
		1.7 NM to RW01R	GLASI 2500	NIVSE 3000	MARJO 4000	DENNE 5000	HUNEX 6000	KRISL 7000	SOLMN 8000	GP 3.00° TCH 54		
1.7		3.8 NM	1.7 NM	3.1 NM	3 NM	3.2 NM	3.2 NM	3.5 NM				
CATEGORY	A	B			C			D				
LPV DA	907/18 200 (200-½)											
RNAV/ VNAV DA	1229/55 522 (500-1)											
RNAV MDA	1320/24	613 (600-½)				1320-1⅓		613 (600-1⅓)				
CIRCLING	1380-1	632 (700-1)				1500-2¼ 752 (800-2¼)		1500-2½ 752 (800-2½)				

CHARLOTTE, NORTH CAROLINA
Orig 09JUL26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 1R

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026

WAAS CH 93947 W01B	APP CRS 003°	Rwy Ldg 10000 TDZE 707 Apt Elev 748
--	------------------------	--

RNAV (GPS) Y RWY 1R
CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.
▲ Circling NA at night. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LNAV Cat C/D visibility to 1 $\frac{3}{4}$ SM.

ALSF-2


MISSED APPROACH:
Climb to 3000 direct
TOMME and hold.

D-ATIS	CHARLOTTE APP CON	
121.15	128.325 (001°-119°)	257.2 (180°-359°)
	120.05 (120°-295°)	307.8 (360°-179°)
	134.75 (296°-360°)	



CHARLOTTE TOWER

118.1	257.8	(1R-36)
126.4	257.8	(1R-19L)
133.35	257.8	(1L-19R)

GND CON
121.8 348.6 (W)
121.9 348.6 (E)


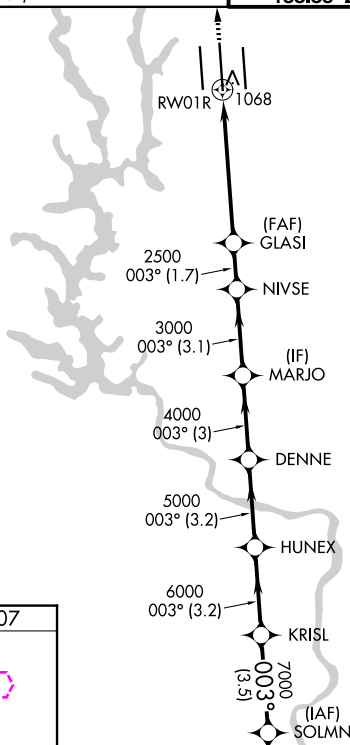


MISSED APCH FIX



ELEV 748	D	TDZE 707
----------	----------	----------

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, 36

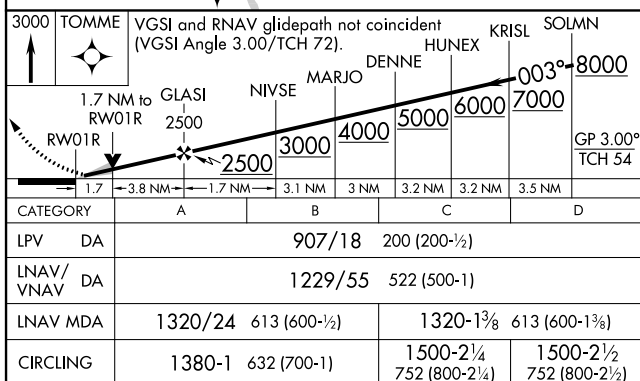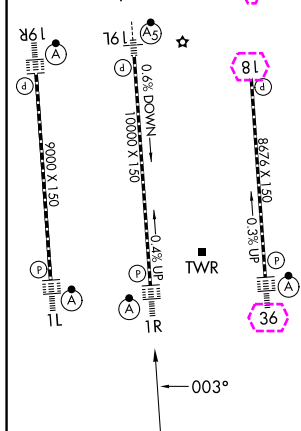

CHARLOTTE, NORTH CAROLINA
Orig 09JUL26

35°13'N-80°57'W

CHARLOTTE/DOUGLAS INTL (CLT)
RNAV (GPS) Y RWY 1R

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT, 2026