



WAAS CH 82527 W27A	APP CRS 275°	Rwy Ldg 7591 TDZE 17 Apt Elev 17
--	------------------------	---

RNAV (GPS) Y RWY 27

SAN DIEGO INTL (SAN)

RNP APCH. Rwy 27 helicopter visibility reduction below RVR 5000 NA. Straight-in Rwy 27 at night, operational VGSi required, remain on or above VGSi glidepath until threshold. Circling NA north of Rwy 9-27. For inop ALS, increase LNAV Cats C/D visibility to 2 SM. Inop table does not apply to LP Cats A/B and LNAV Cat A.	MALS 	MISSED APPROACH: Climb to 2500 direct SARGs and hold.
---	---	---

D-ATIS 134.8	SOCAL APP CON 119.6 363.1 (W) 124.35 279.625 (E)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9
------------------------	--	---	-------------------------

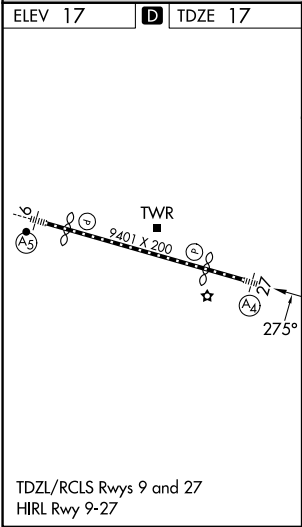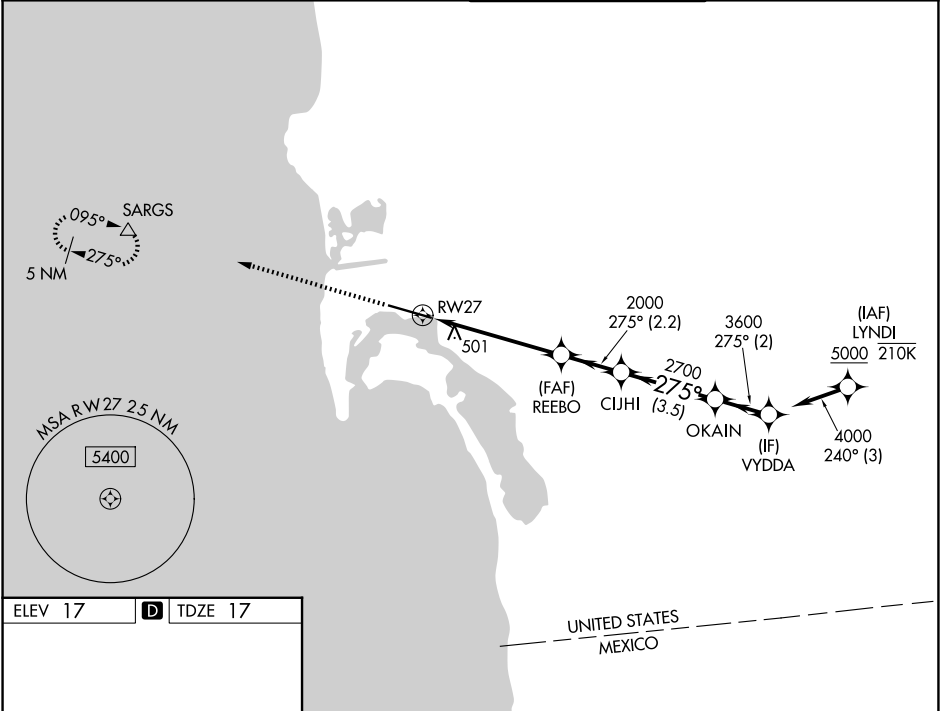

TDZL/RCLS Rwsy 9 and 27
HIRL Rwy 9-27