


LOC I-SBD	APP CRS	Rwy Ldg	10000
109.3	057°	TDZE	1103
		Apt Elev	1159

ILS or LOC Z RWY 6
SAN BERNARDINO INTL (SBD)

⚠ Circling NA northwest of Rwy 6-24. When local altimeter setting not received, use Ontario altimeter setting and increase DA to 1426 feet and all visibilities ¼ SM; increase all MDA 80 feet and S-LOC Cats C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 2000 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.
* Missed approach requires minimum climb of 340 feet per NM to 4000; if unable to meet climb gradient, see LOC Y RWY 6.

D-ATIS 124.175	SOCAL APP CON 127.0 318.2	SAN BERNARDINO TOWER ★ 119.45 (CTAF) 0	GND CON 121.8	UNICOM 122.975
-------------------	------------------------------	---	------------------	-------------------

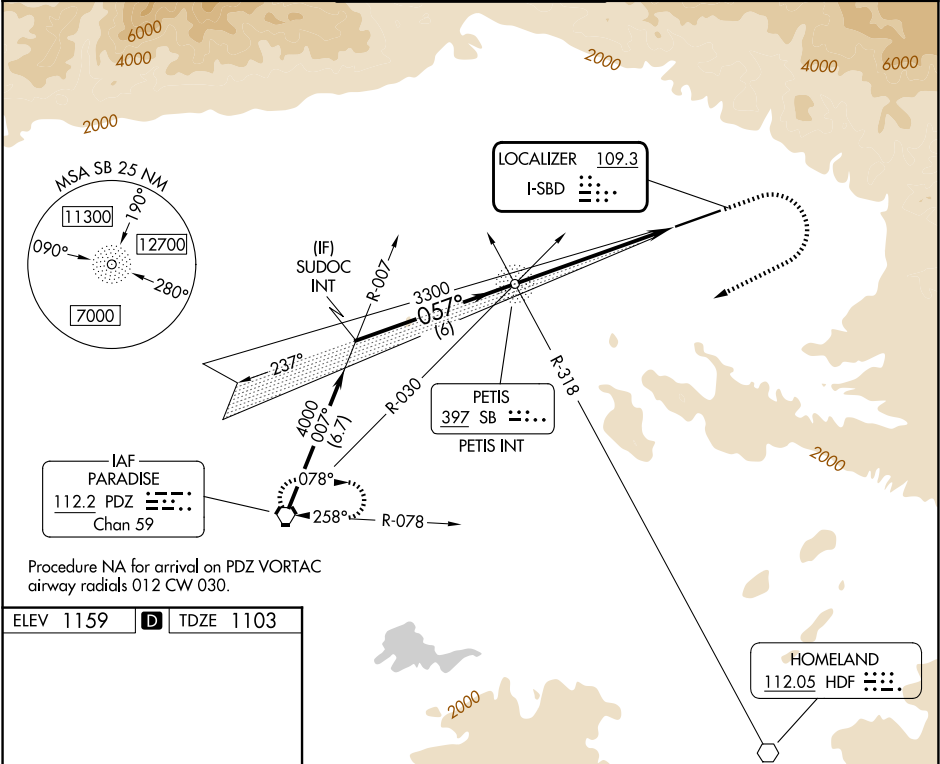

ELEV 1159 **D** TDZE 1103

HIRL Rwy 6-24 **1**
REIL Rwy 6 and 24 **1**

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

SUDOC INT

4000

057°

3300

3118

6 NM

6.1 NM

GS 3.00°
TCH 51

SB NDB
PETIS INT

2000

6000

PDZ

CATEGORY	A	B	C	D
S-ILS 6 *	1353-¾ 250 (200-¾)			
S-LOC 6 *	1740-1	637 (600-1)	1740-1¾	637 (600-1¾)
CIRCLING	1740-1	581 (600-1)	1760-1¾ 601 (700-1¾)	2640-3 1481 (1500-3)