

APP CRS	Rwy Ldg	10526
259°	TDZE	2069
	Apt Elev	2181

RNAV (RNP) RWY 26L
HARRY REID INTL (LAS)

HARRY REID INTL (LAS)

RNP AR APCH.

T For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C.

MALSF



MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to BLD VORTAC and hold.

*Missed approach requires minimum climb of 255 feet per NM to 3200.

D-ATIS
132.4

LAS VEGAS APP CON
125.025 379.15 (West)
119.775 282.2 (East)

LAS VEGAS TOWER

118.75	257.8	(Rwy 1L/19R, 1R/19L)
119.9	257.8	(Rwy 8L/26R, 8R/26L)


GND CON

121.1 270.8 E of 1R/19L
121.9 254.3 W of 1L/19R

CINC DEL

118.0


CPDLC

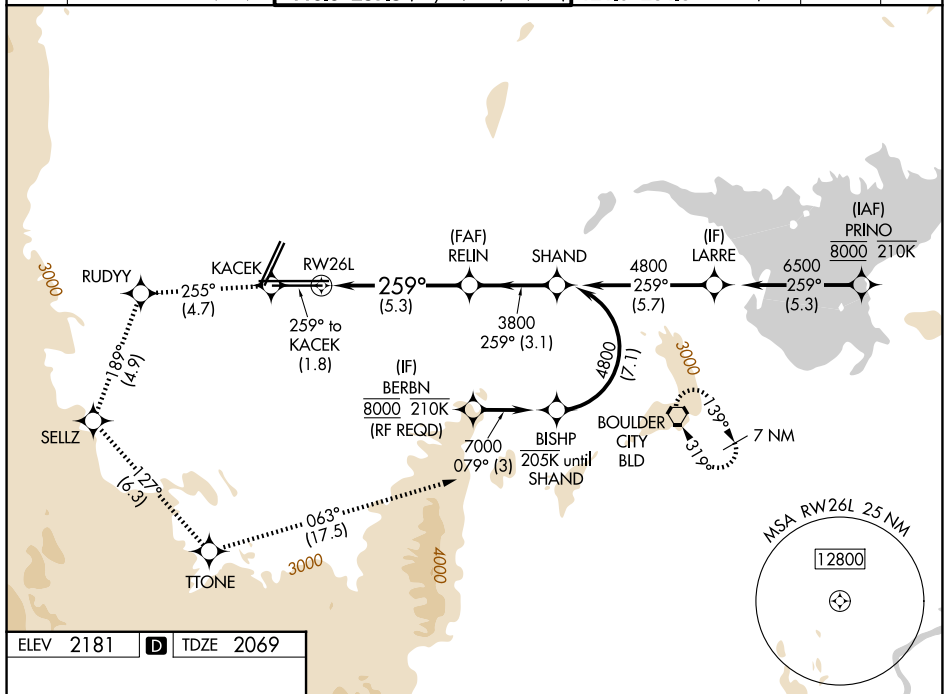

ELEV	2181	D	TDZE	2069
------	------	----------	------	------

D


TDZE 2069



MIRL Rwy 1R-19L

REIL Rwy's 1R, 8R, 19L and 19R

HIRL Rwys 1L-19R, 8L-26R and 8R-26L

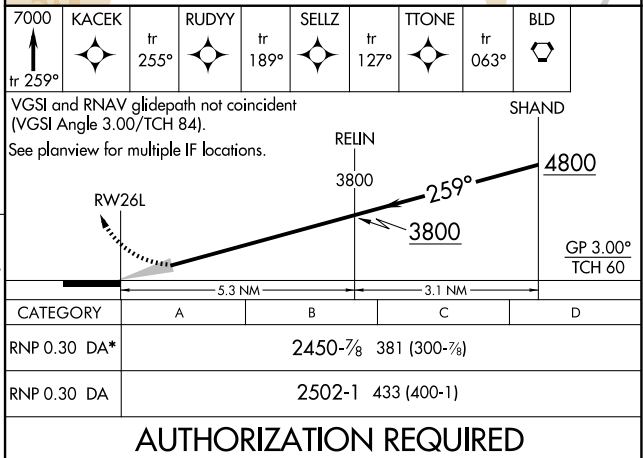

AUTHORIZATION REQUIRED

LAS VEGAS, NEVADA

Orig 25FEB21

36°05'N-115°09'W

HARRY REID INTL (LAS)

RNAV (RNP) RWY 26L