


VORTAC LAS 116.9 Chan 116	APP CRS 262°		26L	26R
		Rwy Ldg	10526	12638
		TDZE	2069	2067
		Apt Elev	2181	2181


VOR RWY 26L/R

HARRY REID INTL (LAS)

	For inop ALS, increase S-26L and S-26R Cat D visibility ¼ SM.	MALSF Rwy 26L	MALS Rwy 26R	MISSED APPROACH: Climb to 4000 then climbing left turn to 6000 on heading 074° and BLD R-270 to BLD VORTAC and hold.		
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER		GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)		121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0	

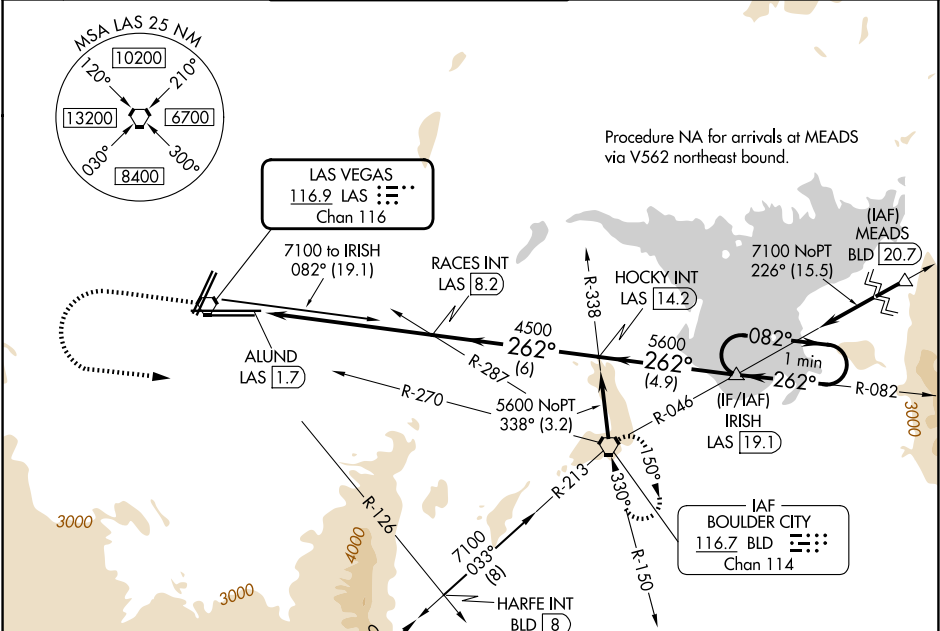

ELEV 2181		TDZE 26L 2069
		TDZE 26R 2067



REIL Rwy 1R, 8R, 19L and 19R					
MIRL Rwy 1R-19L					
HIRL Rwy 1L-19R, 8L-26R and 8R-26L					
FAF to MAP 6.5 NM					
Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

CATEGORY	A		B		C		D	
	2720-¾		651 (600-¾)		2720-1½		651 (600-1½)	
S-26L	2720-¾		651 (600-¾)		2720-1½		651 (600-1½)	
S-26R	2720-¾		653 (600-¾)		2720-1½		653 (600-1½)	
CIRCLING	3020-1¼		3060-1¼		3100-2¾		3540-3	
	839 (900-1¼)		879 (900-1¼)		919 (1000-2¾)		1359 (1400-3)	