

WAAS CH 86299 W25A	APP CRS 256°	Rwy Ldg TDZE Apt Elev	5500 44 45
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 25

OXNARD (OXR)

RNP APCH - GPS.


⚠

Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 440 feet, LNAV/VNAV DA to 437 feet. Increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.

MALSF

MISSED APPROACH: Climb to 2000 direct PEWKI and on track 239° to SQUID and hold.

ATIS 118.05	POINT MUGU APP CON* 124.7 335.5	OXNARD TOWER* 134.95 (CTAF) 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

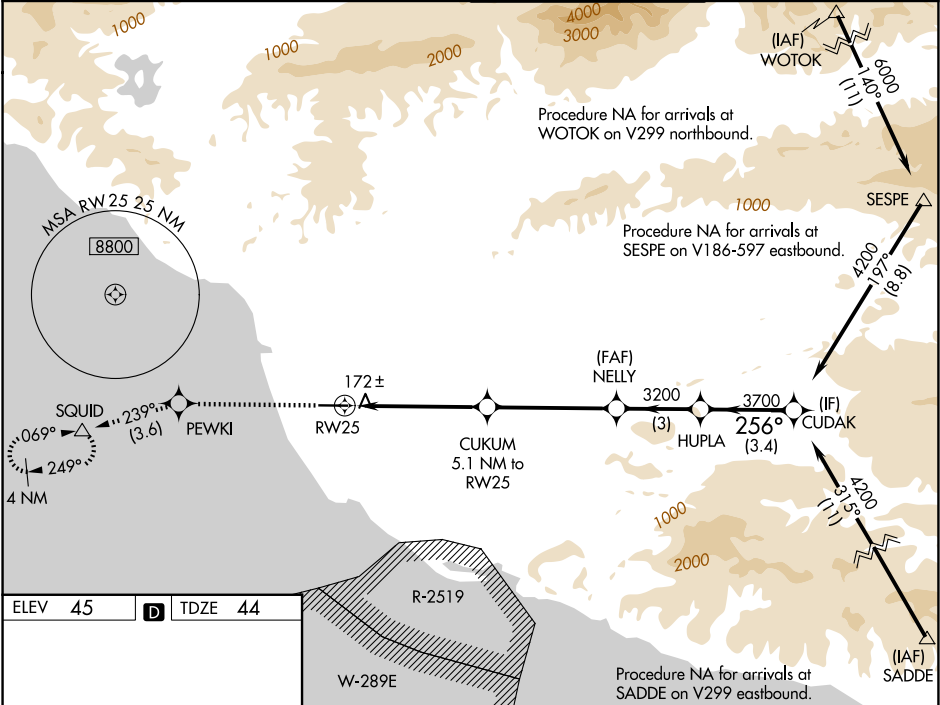

ELEV 45

D

TDZE 44

2000

PEWKI

tr 239°

SQUID

5953 X 100

TWR

256°

1.3 NM to RW25

CUKUM 5.1 NM to RW25

NELLY 3200

HUPLA 3700

CUDAK 4200

GP 3.00° TCH 58

1.3 NM

3.8 NM

4.6 NM

3 NM

3.4 NM

CATEGORY	A	B	C	D
LPV DA	424-1 380 (400-1)			
LNAV/VNAV DA	421-1 377 (400-1)			
LNAV MDA	520-1 476 (500-1)		520-1⅓ 476 (500-1⅓)	
CIRCLING	520-1 475 (500-1)		700-1¾ 760-2¼ 655 (700-1¾) 715 (800-2¼)	

REIL Rwy 7

MIRL Rwy 7-25