


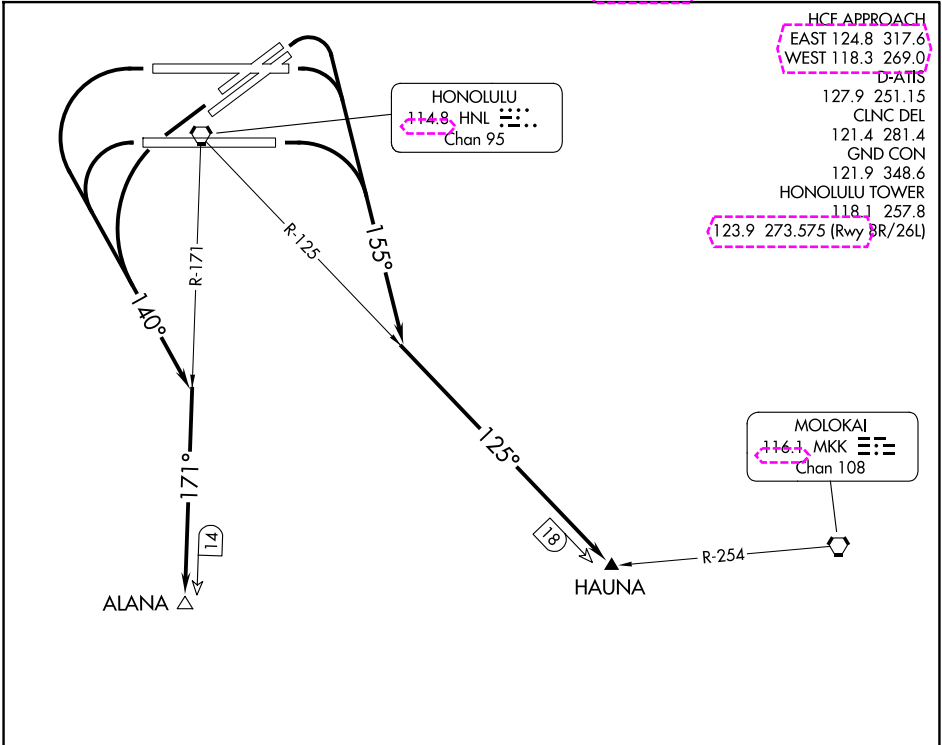

PAC: 09 JUL 2026 to 03 SEP 2026

PAC: 09 JUL 2026 to 03 SEP 2026

TAKEOFF MINIMUMS

- Rwys 4W, 8W, 22W, 26W: NA-ATC.
- Rwys 22L/R, 26R: Standard.
- Rwys 4L/R: Standard with minimum climb of 425' per NM to 1900, do not exceed 180K until southeast bound on 155° heading, or 1700-2½ for VCOA.
- Rwy 8L: Standard with minimum climb of 310' per NM to 1000, or 1700-2½ for VCOA.
- Rwy 8R: Standard with minimum climb of 270' per NM to 1000, or 1700-2½ for VCOA.
- Rwy 26L: Standard with minimum climb of 237' per NM to 300, or 1700-2½ for VCOA.

(CONTINUED ON FOLLOWING PAGE)


NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 4L/R, 8L/R: Climbing right turn to 3000 on heading 155° to intercept HNL R-125 to HAUNA INT before proceeding on course, or. . . .

TAKEOFF RUNWAYS 22L/R, 26L/R: Climbing left turn to 3000 on heading 140° to intercept HNL R-171 to ALANA INT before proceeding on course, or. . . .

. . . for visual climb over airport: obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Daniel K. Inouye Intl Airport southbound at 1600, continue climb to 3000 on HNL R-171 to ALANA INT before proceeding on course.

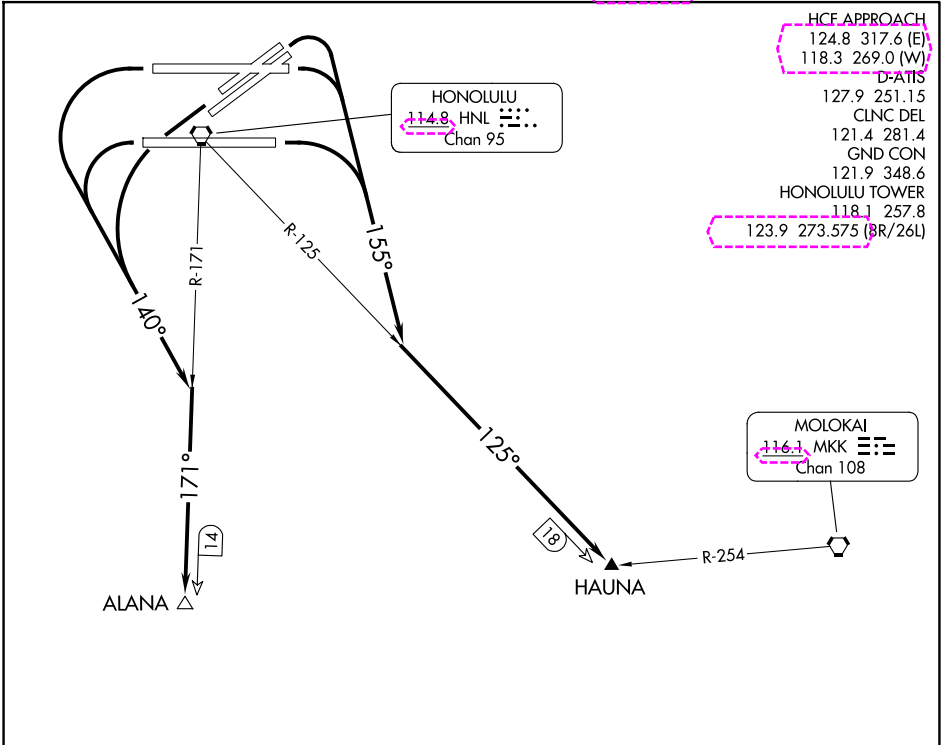

PAC: 03 SEP 2026 to 29 OCT 2026

PAC: 03 SEP 2026 to 29 OCT 2026

TAKEOFF MINIMUMS

- Rwys 4W, 8W, 22W, 26W: NA-ATC.
- Rwys 22L/R, 26R: Standard.
- Rwys 4L/R: Standard with minimum climb of 425' per NM to 1900, do not exceed 180K until southeast bound on 155° heading, or 1700-2½ for VCOA.
- Rwy 8L: Standard with minimum climb of 310' per NM to 1000, or 1700-2½ for VCOA.
- Rwy 8R: Standard with minimum climb of 270' per NM to 1000, or 1700-2½ for VCOA.
- Rwy 26L: Standard with minimum climb of 237' per NM to 300, or 1700-2½ for VCOA.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 4L/R, 8L/R: Climbing right turn to 3000 on heading 155° to intercept HNL R-125 to HAUNA INT before proceeding on course, or. . . .

TAKEOFF RUNWAYS 22L/R, 26L/R: Climbing left turn to 3000 on heading 140° to intercept HNL R-171 to ALANA INT before proceeding on course, or. . . .

. . . .for visual climb over airport: obtain ATC approval for VCOA when requesting IFR clearance. Climb in visual conditions to cross Daniel K. Inouye Intl Airport southbound at 1600, continue climb to 3000 on HNL R-171 to ALANA INT before proceeding on course.