

HONOLULU, HAWAII

AL-754 (FAA)

26190

|                                                 |                        |                                                                     |
|-------------------------------------------------|------------------------|---------------------------------------------------------------------|
| LOC/DME I-HUM<br><b>110.5</b><br>Chan <b>42</b> | APP CRS<br><b>042°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>8950</b><br><b>8</b><br><b>13</b> |
|-------------------------------------------------|------------------------|---------------------------------------------------------------------|

# ILS Y RWY 4R




DANIEL K INOUEY INTL (HNL) (PHNL)

DME required. From HUBAP: RNAV 1-GPS required.  
DME or RADAR required for procedure entry.

For inop ALS, increase S-ILS 4R all Cats visibility to 7/8 SM.

MALSR MISSED APPROACH: Climb to 540 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL 13.9 DME and hold. \*Missed approach requires minimum climb of 318 feet per NM to 1820. (If unable to meet climb gradient use S-ILS 4R minimums).

|                               |                                    |                                                                       |                               |
|-------------------------------|------------------------------------|-----------------------------------------------------------------------|-------------------------------|
| D-ATIS<br><b>127.9 251.15</b> | HCF APPROACH<br><b>118.3 269.0</b> | HONOLULU TOWER<br><b>118.1 257.8</b><br><b>123.9 273.575</b> (8R/26L) | GND CON<br><b>121.9 348.6</b> |
|-------------------------------|------------------------------------|-----------------------------------------------------------------------|-------------------------------|

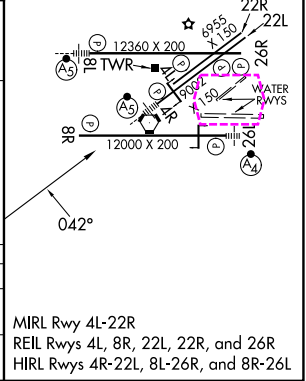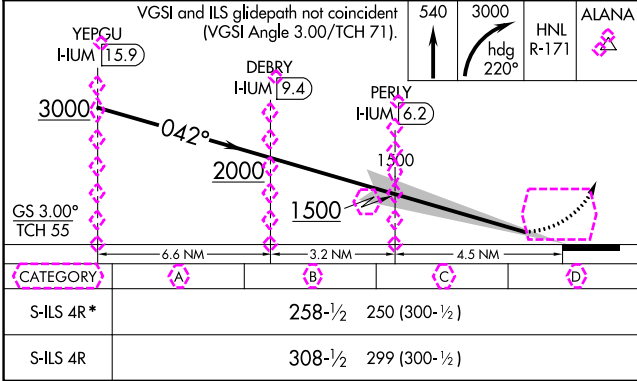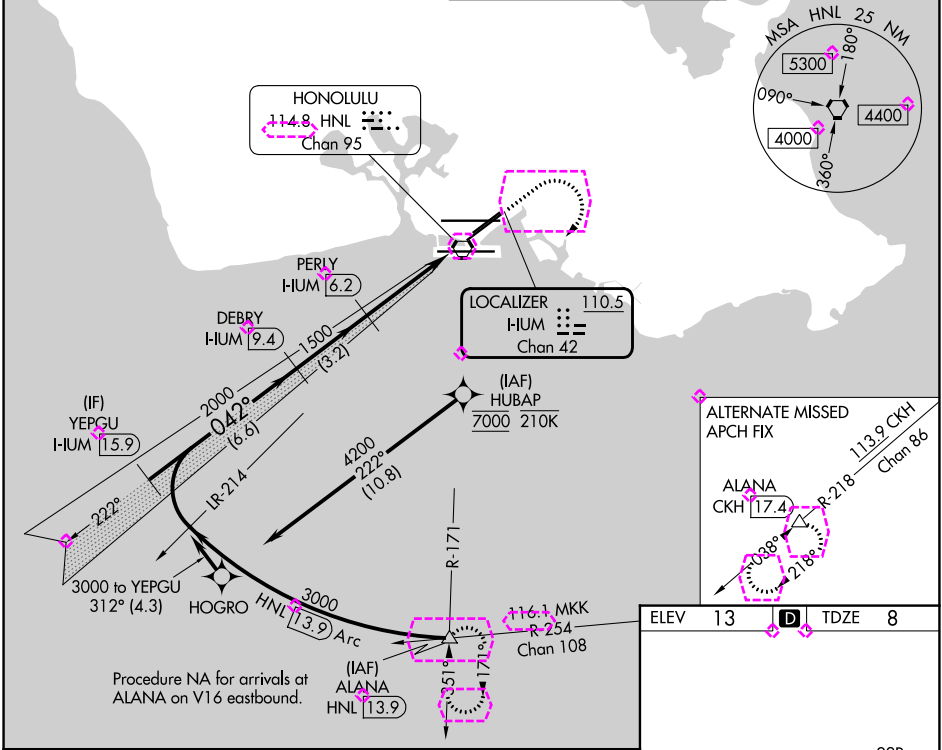

HONOLULU, HAWAII

Amtd 2A 08SEP22

DANIEL K INOUEY INTL (HNL) (PHNL)

21°19'N-157°55'W

# ILS Y RWY 4R

PAC: 09 JUL 2026 to 03 SEP 2026

PAC: 09 JUL 2026 to 03 SEP 2026

|                                                |                        |                                                            |
|------------------------------------------------|------------------------|------------------------------------------------------------|
| LOC/DME I-UM<br><b>110.5</b><br>Chan <b>42</b> | APP CRS<br><b>042°</b> | Rwy Ldg <b>8950</b><br>TDZE <b>8</b><br>Apt Elev <b>13</b> |
|------------------------------------------------|------------------------|------------------------------------------------------------|

ILS Y RWY 4R

DANIEL K INOUE INTL (HNL) (PHNL)

DME required. From HUBAP: RNAV 1-GPS required.  
DME or RADAR required for procedure entry.

For inop ALS, increase S-ILS 4R all Cats visibility to  $\frac{7}{8}$  SM.

MALSR

**MISSED APPROACH:** Climb to 540 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL 13.9 DME and hold. \*Missed approach requires minimum climb of 318 feet per NM to 1820. (If unable to meet climb gradient use S-HLS 4R minimums).

|                               |                                    |                                                                       |                               |
|-------------------------------|------------------------------------|-----------------------------------------------------------------------|-------------------------------|
| D-ATIS<br><b>127.9 251.15</b> | HCF APPROACH<br><b>118.3 269.0</b> | HONOLULU TOWER<br><b>118.1 257.8</b><br><b>123.9 273.575 (8R/26L)</b> | GND CON<br><b>121.9 348.6</b> |
|-------------------------------|------------------------------------|-----------------------------------------------------------------------|-------------------------------|

