

WAAS CH 72936 W02A	APP CRS 016°	Rwy Ldg TDZE 456 Apt Elev 458
--	------------------------	---

RNAV (GPS) RWY 2

AVI SUQUILLA (P2Ø)

RNP APCH - GPS.


▼

⚠ NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. Baro-VNAV and VDP NA when using Blythe altimeter setting. When local altimeter setting not received, use Blythe altimeter setting and increase LPV DA to 804 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1018 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat B/C ¼ SM, and Circling visibility Cat B ¼ SM.

MISSED APPROACH: (Do not exceed 180K until PKE VORTAC) Climb to 1100, then climbing left turn to 5600 direct PKE VORTAC and hold, continue climb-in-hold to 5600.

AWOS-3PT 132.75	LOS ANGELES CENTER 128.15 285.6	UNICOM 122.725 (CTAF) Ø
---------------------------	---	-----------------------------------

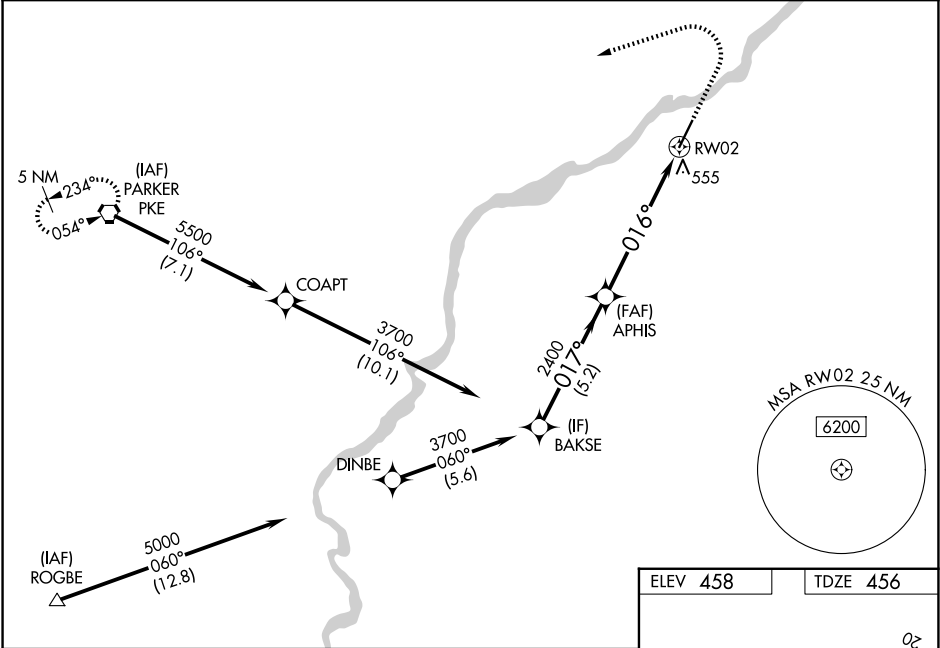

BAKSE		APHIS		1100	5600	PKE
3700		2400		1.9 NM to RW02		
GP 3.00°		2400		RW02		
TCH 40		5.2 NM		4.1 NM		
CATEGORY	A	B	C	D		
LPV DA	706-¾ 250 (300-¾)				NA	
LNAV/VNAV DA	920-1⅓ 464 (500-1⅓)				NA	
LNAV MDA	1100-1	644 (700-1)	1100-3 644 (700-3)	NA		
CIRCLING	1100-1	642 (700-1)	1580-3 1122 (1200-3)	NA		

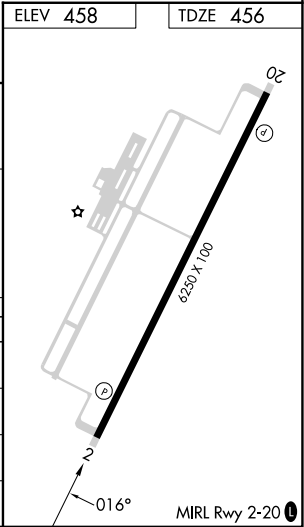

SW-4, 03 SEP 2026 to 01 OCT 2026

SW-4, 03 SEP 2026 to 01 OCT 2026