


WAAS CH 45645 W05A	APP CRS 035°	Rwy Ldg TDZE 1513 Apt Elev 1515
--	------------------------	---

RNAV (GPS) RWY 5

HEMET-RYAN (HMT)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 then climbing left turn to 6000 direct JESEX and hold, continue climb-in-hold to 6000. *Missed approach requires minimum climb of 400 feet per NM to 3000.
When local altimeter setting not received, procedure NA.	

AWOS-3PT 118.375	MARCH APP CON ★ 133.5 306.975	UNICOM 123.0 (CTAF)
----------------------------	---	-------------------------------

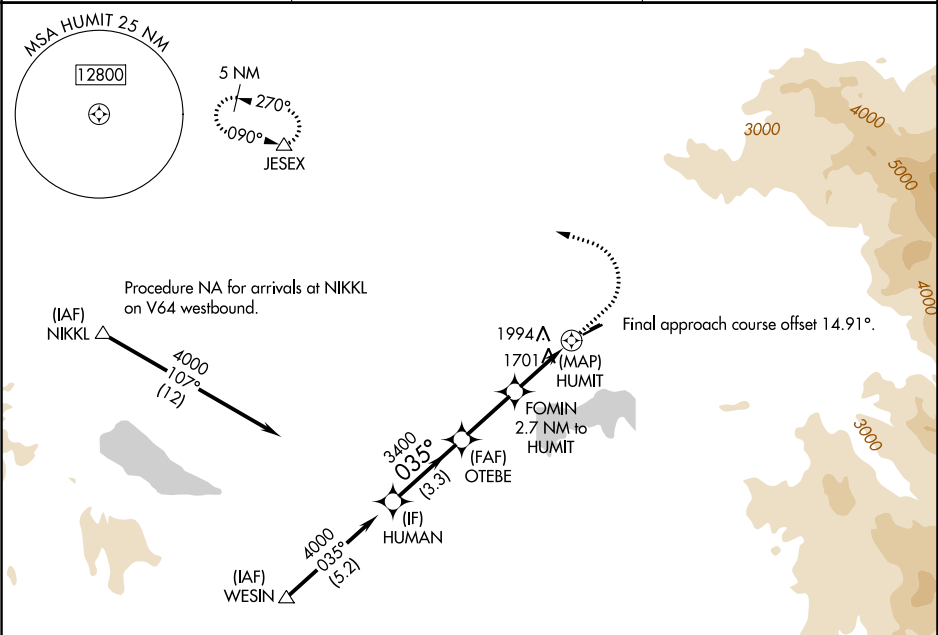

				ELEV 1515 TDZE 1513		
2000 6000 JESEX						
4000 035° 3400 3.08° TCH 40 2600 0.8 NM to HUMIT HUMIT 0.3% UP 2014 X 25 4315 X 100 035°						
3.3 NM 2.6 NM 2 NM 0.8 0.5						
CATEGORY	A	B	C	D		
LP MDA*	1960-1	447 (500-1)	1960-1 $\frac{3}{8}$ 447 (500-1 $\frac{3}{8}$)	NA		
LP MDA	2460-1 $\frac{1}{4}$	947 (1000-1 $\frac{1}{4}$)	2460-2 $\frac{1}{2}$ 947 (1000-2 $\frac{1}{2}$)	NA		
LNAV MDA*	2160-1	647 (700-1)	2160-1 $\frac{7}{8}$ 647 (700-1 $\frac{7}{8}$)	NA		
LNAV MDA	2580-1 $\frac{1}{4}$ 1067 (1100-1 $\frac{1}{4}$)	2580-1 $\frac{1}{2}$ 1067 (1100-1 $\frac{1}{2}$)	2580-3 1067 (1100-3)	NA		
CIRCLING	2580-1 $\frac{1}{4}$ 1065 (1100-1 $\frac{1}{4}$)	2580-1 $\frac{1}{2}$ 1065 (1100-1 $\frac{1}{2}$)	2800-3 1285 (1300-3)	NA		
					MIRL Rwy 5-23	