

LOC I-MZX

111.75

APP CRS

172°

Rwy Ldg

8001

TDZE

146

Apt Elev

146

ILS or LOC RWY 17

AUGUSTA RGNL AT BUSH FLD (AGS)

ADF required for LOC only.

▽

▲

For inop ALS, increase S-LOC 17 Cats C and D visibility to 1½ SM.

MALS R

MISSED APPROACH: Climb to 3000 on heading 180° and IRQ VORTAC R-164 to SHELLY INT and hold.

ATIS

132.75

AUGUSTA APP CON★

126.8 270.3

AUGUSTA TOWER★


118.7 (CTAF) 239.3

GND CON

121.9 348.6

UNICOM

122.95

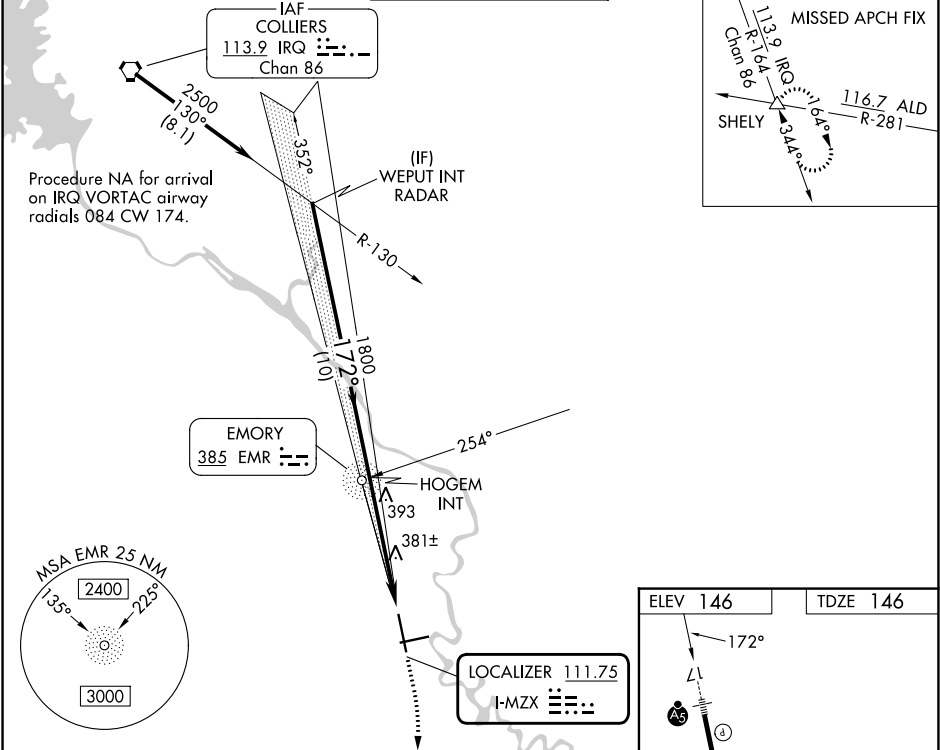

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

WEPUT INT RADAR

2500

172°

1800

1800

3000

hdg 180°

IRQ R-164

SHELLY △

GS 3.00° TCH 57

10 NM

5 NM

FAF to MAP 5 NM

CATEGORY	A	B	C	D
S-ILS 17	351/24 205 (300-½)			
S-LOC 17	640/24	494 (500-½)	640/50	494 (500-1)
CIRCLING	780-1	634 (700-1)	780-1¾ 634 (700-1¾)	940-2½ 794 (800-2½)

ELEV 146

TDZE 146

172°

△

8001 X 150

6001 X 100

26

35

MIRL Rwy 8-26

HIRL Rwy 17-35

REIL Rws 8 and 26

Knots

60 90 120 150 180

Min:Sec

5:00 3:20 2:30 2:00 1:40