

WAAS CH 82507 W06A	APP CRS 071°	Rwy Ldg 8566 TDZE 119 Apt Elev 128
--	------------------------	---

RNAV (GPS) Y RWY 6L
LOS ANGELES INTL (LAX)

LOS ANGELES INTL (LAX)




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. Simultaneous approach authorized.

MALSR



MISSED APPROACH: Climb to 3000 direct ZANAV and track 042° to AMTRA and hold.

D-ATIS 133.8	SOCAL APP CON				LOS ANGELES TOWER	GND CON		
	124.3	363.2 (APCH from W)	124.9	269.0 (090°-224°)		121.65	327.0 (N)	
	124.5	235.975 (225°-044°)	128.5	360.7 (045°-089°)		121.75	327.0 (S)	
							121.4	327.0 (W)

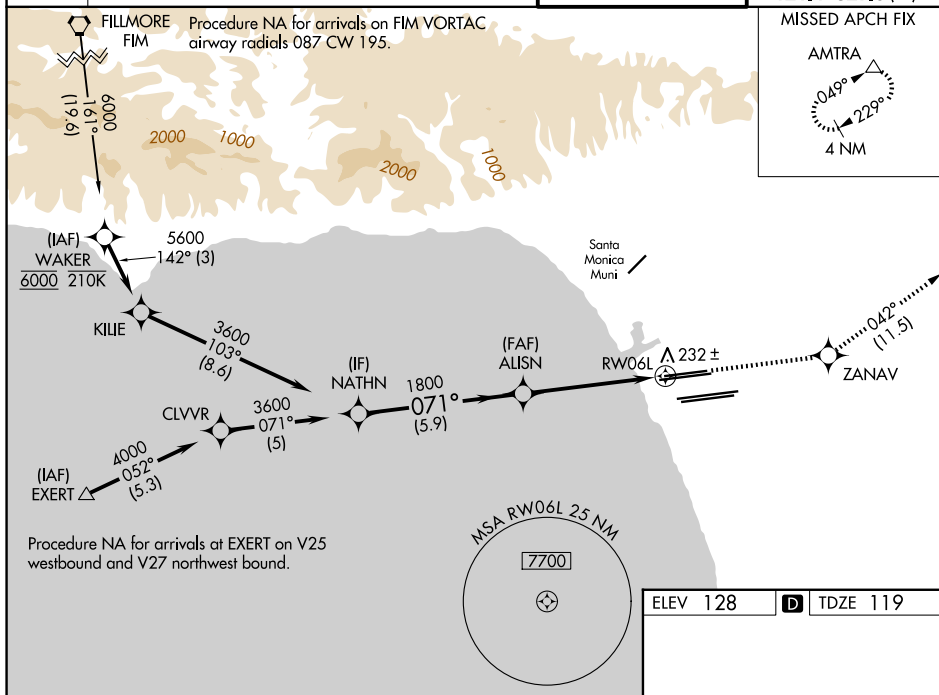

SW-3, 01 OCT 2026 to 29 OCT 2026

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 77).

3600

071°

1800

GP 3.00°
TCH 55

5.9 NM

4.1 NM

1 NM

* 1 NM to RW06L

RW06L

↑ ZANAV

tr 042°

AMTRA △

* RNAV only

CATEGORY	A	B	C	D
LPV DA	369/24 250 (300-½)			
RNAV/ VNAV DA	411/24 292 (300-½)			
RNAV MDA	500/24 381 (400-½)		500/35 381 (400-¾)	

