


LOC/DME I-SNA 111.75 Chan 54(Y)	APP CRS 016°	Rwy Ldg 5700 TDZE 56 Apt Elev 56
---	------------------------	---

LOC BC RWY 2L
JOHN WAYNE/ORANGE COUNTY (SNA)

 Circling Rwy 20L NA at night.	MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold.
---	---

D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER★ 126.8 (CTAF) 343.625	GND CON 120.8	UNICOM 122.95
------------------------	-------------------------------------	--	-------------------------	-------------------------

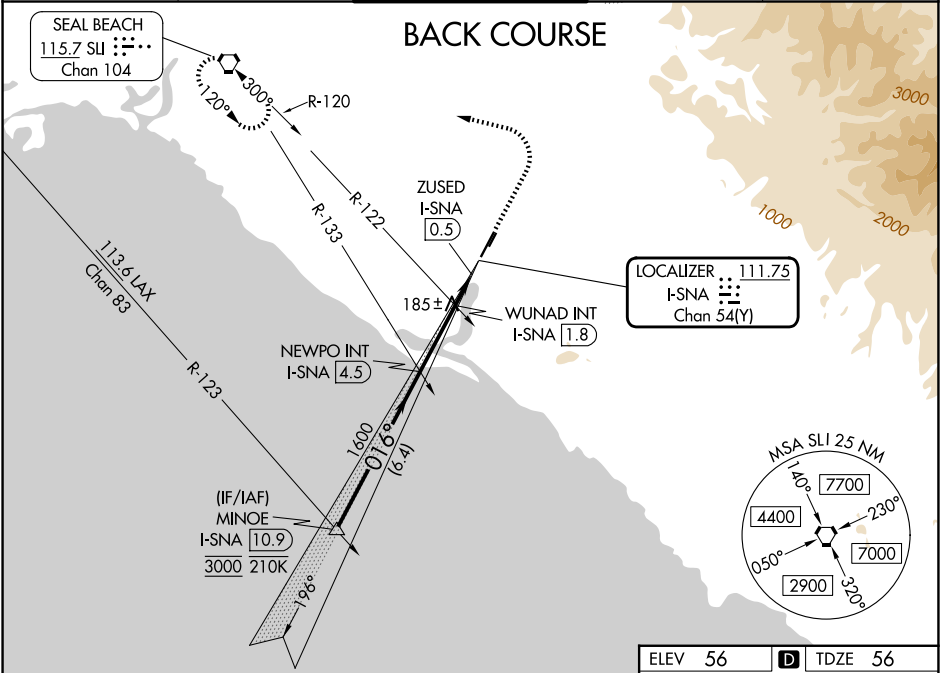

MINOE

I-SNA

10.9

VGSI and descent angles not coincident

(VGSI Angle 3.00/TCH 75).

800

2600

SLI

NEWPO INT

I-SNA

4.5

WUNAD INT

I-SNA

1.8

I-SNA DME ANTENNA

ZUSED

I-SNA

0.5

3000

016°

1600

560

Disregard GS indications.

6.4 NM

2.7 NM

1.3 NM

0.7

CATEGORY	A	B	C	D
S-LOC 2L	560-1	504 (600-1)	560-1 $\frac{3}{8}$	504 (600-1 $\frac{3}{8}$)
CIRCLING	640-1	584 (600-1)	840-2 $\frac{1}{4}$ 784 (800-2 $\frac{1}{4}$)	1180-3 1124 (1200-3)
WUNAD FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 2L	480-1	424 (500-1)	480-1 $\frac{1}{4}$	424 (500-1 $\frac{1}{4}$)
CIRCLING	640-1	584 (600-1)	840-2 $\frac{1}{4}$ 784 (800-2 $\frac{1}{4}$)	1180-3 1124 (1200-3)

REIL Rwy 20L

MIRL Rwy 2R-20L

HIRL Rwy 2L-20R

AS

20L

20R

0.3NM Up

0.4NM Up

2880-7.75

5000-1.50-20

2L

016°

TWR

STAR

FAF to MAP 3.9 NM

Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18