



WAAS CH 99502 W20A	APP CRS 196°	Rwy Ldg TDZE 54 Apt Elev 56
--	------------------------	---

RNAV (GPS) Y RWY 20R

JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS. RADAR required.		MALSR 	MISSED APPROACH: Climb to 3000 direct MINOE.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Circling Rwy 20L NA at night. For inop ALS increase LNAV/VNAV visibility to 1 3/8 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.			

D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 0 343.625	GND CON 120.8	UNICOM 122.95
------------------------	-------------------------------------	---	-------------------------	-------------------------

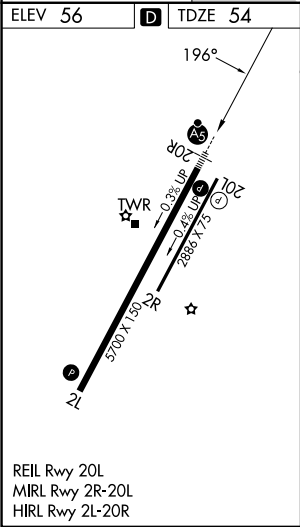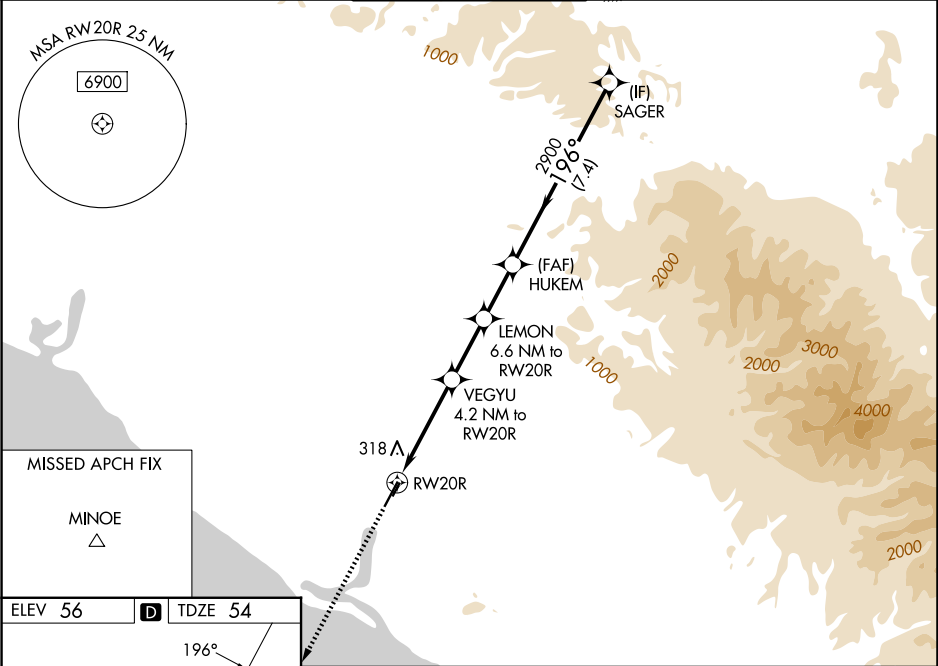

3000 MINOE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).		HUKEM	SAGER
1.5 NM to RW20R		VEGYU 4.2 NM to RW20R	LEMON 6.6 NM to RW20R	2900	3500
RW20R		1420	2200	2900	GP 3.00° TCH 51
1.5 NM		2.7 NM	2.5 NM	2.2 NM	7.4 NM
CATEGORY	A	B	C	D	
LPV DA*	255/24		201 (200-1/2)		
LNAV/VNAV DA	516/50		462 (500-1)		
LNAV MDA	580/24	526 (600-1/2)	580/55 526 (600-1)		
CIRCLING	640-1	584 (600-1)	840-2 7/4 784 (800-2 1/4)	1180-3 1124 (1200-3)	