


APP CRS	Rwy Ldg	10526
079°	TDZE	2157
	Apt Elev	2181

RNAV (RNP) RWY 8R
HARRY REID INTL (LAS)

RNP AR APCH. RF required.			MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to VMPRE and hold, continue climb-in-hold to 7000.		
▼ For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C.					
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0	

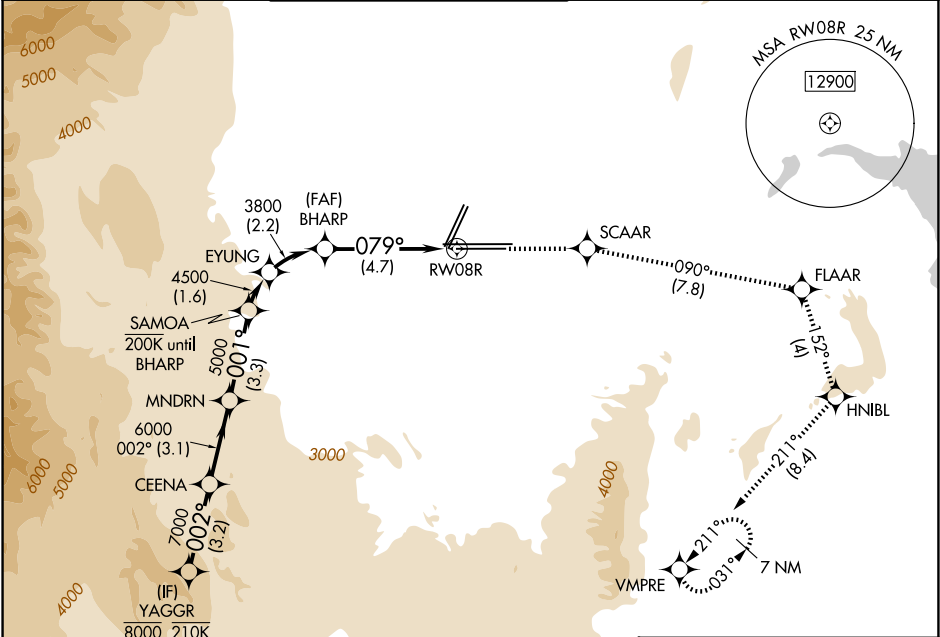

(RNP 0.30)		ELEV 2181		D		TDZE 2157			
YAGGR		7000	SCAAR	tr 090°	FLAAR	tr 152°	HNIBL	tr 211°	VMPRE
CEENA		MNDRN	SAMOA	EYUNG	BHARP	RW08R			
8000	002°	7000	001°	6000	5000	4500	3800	079°	
GP 3.15°	TCH 60	3.2 NM		3.1 NM	3.3 NM	1.6 NM	2.2 NM	4.7 NM	
CATEGORY	A		B		C		D		
RNP 0.10 DA	2544-1 1/8		387 (400-1 1/8)						
RNP 0.30 DA	2613-1 3/8		456 (500-1 3/8)						
AUTHORIZATION REQUIRED									

Diagram illustrating the missed approach procedure with climb gradients and altitudes:

- Initial climb: 1.1% DOWN, 1.1% UP, 1.