


LOC I-RAL <u>110.9</u>	APP CRS 089°	Rwy Ldg TDZE Apt Elev	5401 795 819
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 9
RIVERSIDE (RAL)

	Circling NA north of Rwy 9-27 for Cat D. When local altimeter setting not received, use Chino altimeter setting and increase all DA 46 feet and all MDA 60 feet, increase S-ILS 9 visibility $\frac{1}{8}$ mile all Cats, S-LOC 9 Cat C/D visibility $\frac{1}{8}$ mile. Autopilot coupled approach NA below 1192. *Missed approach requires minimum climb of 270 feet per NM to 2500.	MISSED APPROACH: Climb to 2000 then climbing right turn to 4200 on PDZ VORTAC R-098 to PDZ VORTAC then on PDZ VORTAC R-256 to WISUP INT/PDZ VORTAC 9.4 DME and hold.
--	--	---

ATIS 128.8	SOCAL APP CON 135.4 377.125	RIVERSIDE TOWER ★ 121.0 (CTAF) 0 257.8	GND CON 124.125	UNICOM 122.95
---------------	--------------------------------	---	--------------------	------------------

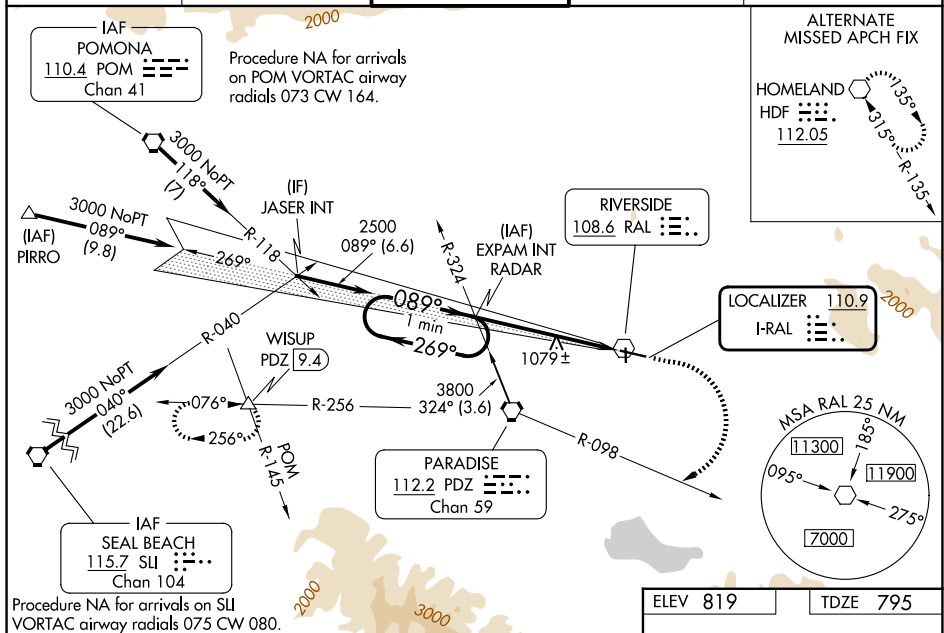

One Minute Holding Pattern

EXPAN INT RADAR

2500

2800

269°

089°

2500

089°

5.3 NM

G5 3.00° TCH 41


2000

4200

PDZ R-098

PDZ R-256

WISUP

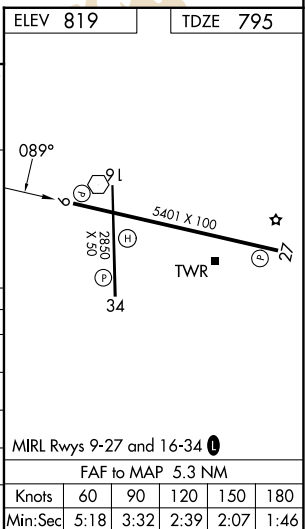

SW-3, 01 OCT 2026 to 29 OCT 2026