

ILS or LOC RWY 3

LOC/DME I-NTD 109.3 Chan 30	APCH CRS 032°	Rwy Idg 11,102 TDZE 10 Arpt Elev 13
---	-------------------------	--

[USN]

POINT MUGU NAS (NAVAL BASE VENTURA CO) (KNTD)

DME or RADAR required.

T * When ALS inop, increase vis to 1 mile.
 ** Circling not authorized SE of Rwy 3-21.
 CAT A remain within 1.3 NM, CAT B remain within 1.5 NM,
 CAT C remain within 1.7 NM, CAT D remain within 2.3 NM.


SALSF



MISSED APPROACH: Climb to 500, then climbing left turn to 2600 on heading 181° and NTD TACAN R-211 to HALTU and hold.

ATIS ★	APP CON	TOWER ★	GND CON	ASR/ PAR
125.55 363.05	128.65 307.275	124.85 290.375	121.6 360.2	

ILS glideslope not useable beyond 8 NM.

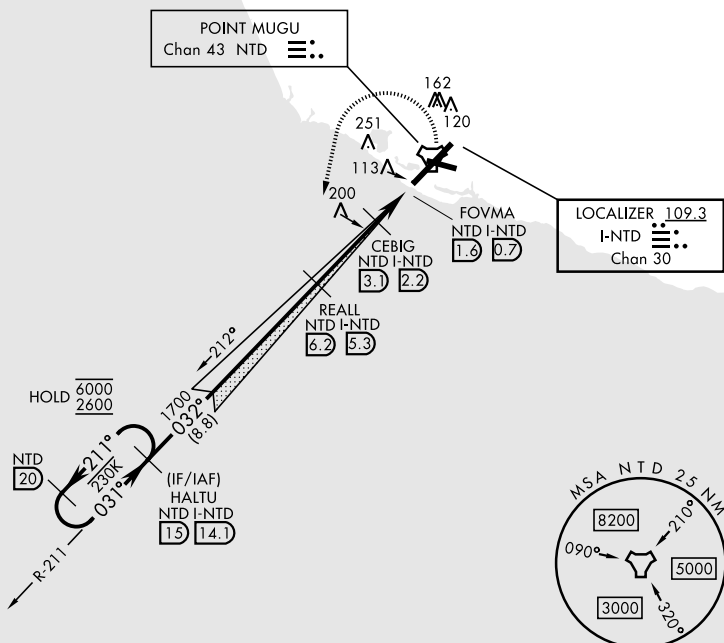

EMERG SAFE ALT 100 NM 12,300

500
↑

2600
hdg 181°

NTD R-211

HALTU
NTD 15

NTD 20
211°
031°

HALTU
NTD 15
I-NTD 14.1

REALL
NTD 6.2
I-NTD 5.3

CEBIG
NTDI-NTD 3.1
NTDI-NTD 2.2

FOVMA
NTDI-NTD 1.6
NTDI-NTD 0.7

6000
2600

1700
3.00°
TCH 46

032°

680

3.2 NM
1.5 NM
0.5 NM

CATEGORY	A	B	C	D	E
S-ILS 3	210-¾		200	(200-¾)	
S-LOC 3*	380-¾		370	(400-¾)	
CIRCLING**	420-1 407 (500-1)	520-1 507 (600-1)	520-1½ 507 (600-1½)	580-2 567 (600-2)	NOT AUTHORIZED

ELEV 13 TDZE

11.192 x 200

5502 x 200

TWR

032°

HIRL all rwy

OXNARD, CALIFORNIA

34° 07' N - 119° 07' W

POINT MUGU NAS (NAVAL BASE VENTURA CO) KNTD

Orig 27NOV25

PANS-OPS

ILS or LOC RWY 3