ILS or LOC RWY 27L

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

LOC/DME I-FSQ	APP CRS		27L	27R
108.5	275°	Rwy Ldg	8865	11890
Chan 22		TDZE	999	985
		Apt Elev	1026	1026

DME or RADAR required.
RADAR required for procedure entry.

Simultaneous approach authorized.
Inop table does not apply to Sidestep Rwy 27R.


Rwy 27L ALSF-2 (A)

Rwy 27R MALS (A4)

MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 265° and RMG VORTAC R-165 to DUTIE/RMG 31.3 DME/RADAR and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS
119.65	134.725 379.9	119.1	125.325	123.85	119.3	119.5	254.4

GND CON			ALL
(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS
121.9	121.75	121.65	254.4

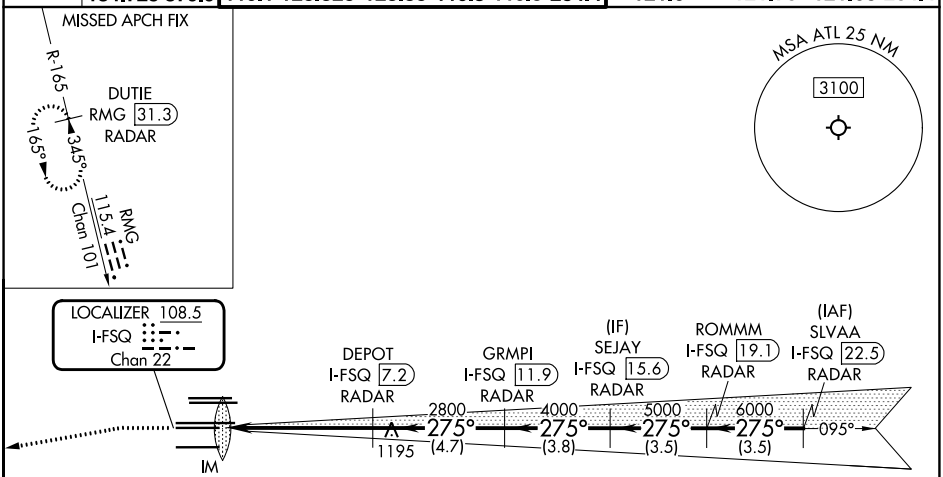


SE-4, 29 OCT 2026 to 26 NOV 2026

SE-4, 29 OCT 2026 to 26 NOV 2026

ELEV 1026 D


TDZE 27L 999
TDZE 27R 985



HIRL all Rwys
TDZ/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

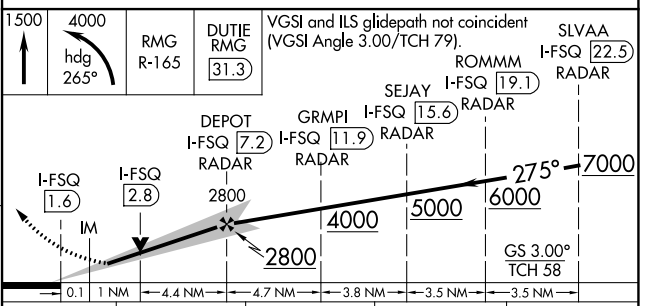

CATEGORY	A	B	C	D
S-ILS 27L	1199/18 200 (200-½)			
S-LOC 27L	1420/24 421 (400-½)		1420/40 421 (400-¾)	
SIDESTEP 27R	1420-1⅝ 435 (400-1⅝)		1420-2¼ 435 (400-2¼)	1420-2¾ 435 (400-2¾)