RNAV (GPS) RWY 8R

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

WAAS	APP CRS	Rwy Ldg	9999
CH 48800	095°	TDZE	1024
W08D		Apt Elev	1026


RNP APCH - GPS.


RADAR required.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. Simultaneous approach authorized with Rwy 9L or 9R or 10. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MISSED APPROACH: Climb to 1500 then climbing left turn to 3500 direct TROYS and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER						GND CON			
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
119.65	134.725 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4






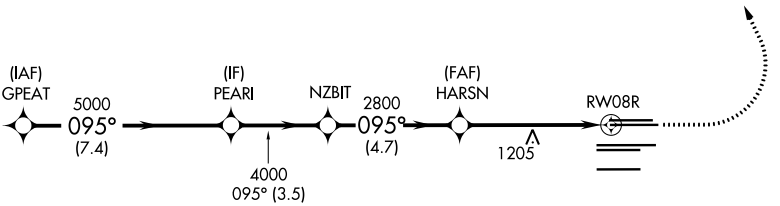

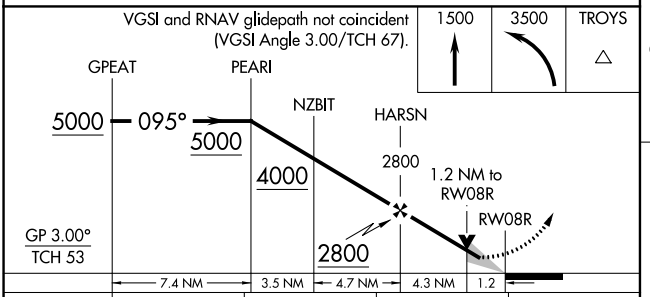

CATEGORY	A	B	C	D
LPV DA	1282/40 258 (300-¾)			
LNAV/VNAV DA	1440/60 416 (500-1¼)			
LNAV MDA	1460/55 436 (500-1)		1460-1¼ 436 (500-1¼)	

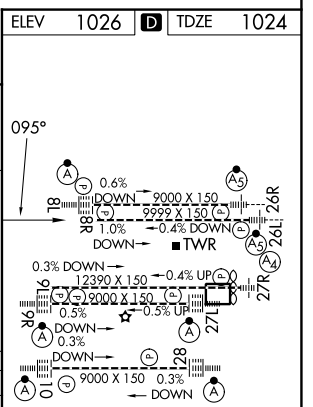

HIRL all Rwys
TDZL/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026