WAAS CH 61000 W26B	APP CRS 275°	Rwy Ldg 8500 TDZE 990 Apt Elev 1026

RNAV (GPS) Y RWY 26R


HARTSFIELD/JACKSON ATLANTA INTL (ATL)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 27R or 27L or 28, or Rwys 27R and 28. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 3500 direct TROYS and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER					ALL	GND CON			ALL
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	RWYS
119.65	134.725 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4





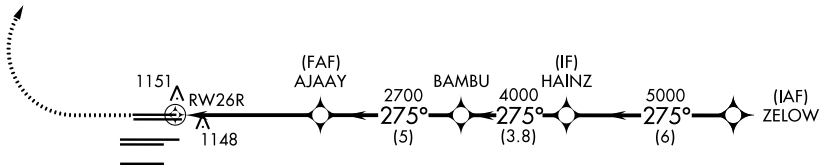


SE-4, 29 OCT 2026 to 26 NOV 2026


SE-4, 29 OCT 2026 to 26 NOV 2026

ELEV 1026 D TDZE 990

RADAR REQUIRED



HIRL all Rwys
TDZL/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

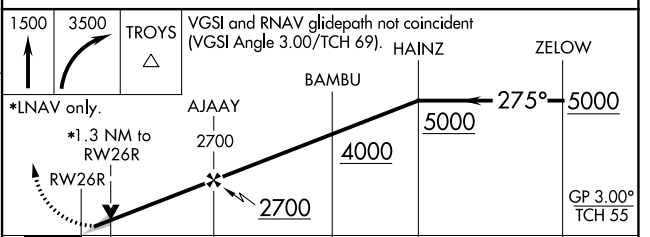

CATEGORY	A	B	C	D
LPV DA	1190/18 200 (200-½)			
LNAV/VNAV DA	1426/50 436 (500-1)			
LNAV MDA	1460/24 470 (500-½)		1460/50 470 (500-1)	