WAAS CH 61299 W28A	APP CRS 275°	Rwy Ldg 9000 TDZE 998 Apt Elev 1026

RNAV (GPS) Y RWY 28


HARTSFIELD/JACKSON ATLANTA INTL (ATL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 26R or 26L or 27R, or Rwys 26R and 27R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2


MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER						GND CON				
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	ALL RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28	ALL RWYS
119.65	134.725 379.9	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65	254.4

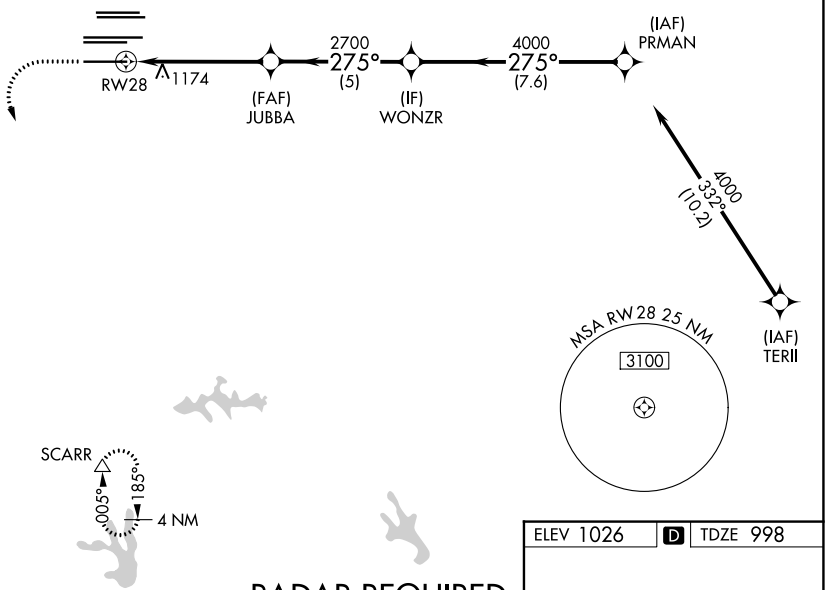


RADAR REQUIRED

ELEV 1026	D	TDZE 998

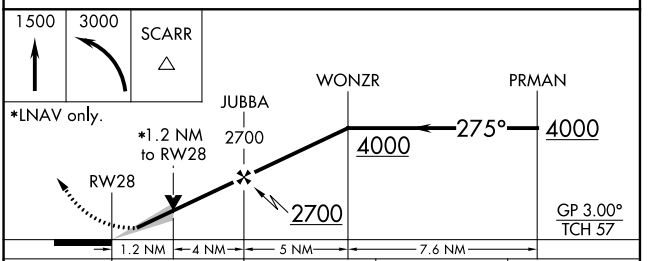

CATEGORY	A	B	C	D
LPV DA	1198/18	200 (200-½)		
LNAV/VNAV DA	1250/24	252 (300-½)		
LNAV MDA	1440/24	442 (500-½)	1440/45	442 (500-⅞)



HIRL all Rwys
TDZL/RCLS Rwys 8L, 9R, 10, 26R, 27L and 28

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026