ILS or LOC RWY 19R

CHARLOTTE/DOUGLAS INTL (CLT)

LOC/DME I-RGS	APP CRS	Rwy Ldg	9000
110.15	183°	TDZE	744
Chan 38(Y)		Apt Elev	748


DME or RADAR required. RADAR required for procedure entry.


Simultaneous approach authorized. CILOV Minimums: For inop ALS, increase S-LOC 19R Cats C/D visibility to RVR 4500.


ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on heading 280° and on BZM VOR/DME R-183 to STULL/BZM 46.2 DME/RADAR and hold, continue climb-in-hold to 4000.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON	
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (18-36)	121.8	348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (1R-19L)	121.9	348.6 (E)
	134.75 (296°-360°)		133.35	257.8 (1L-19R)		

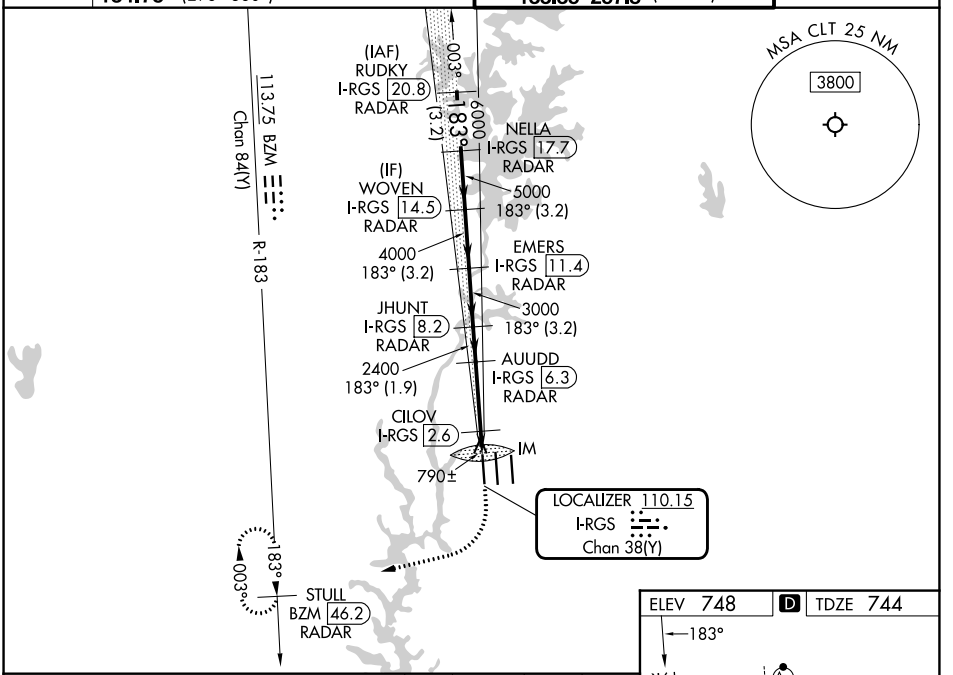

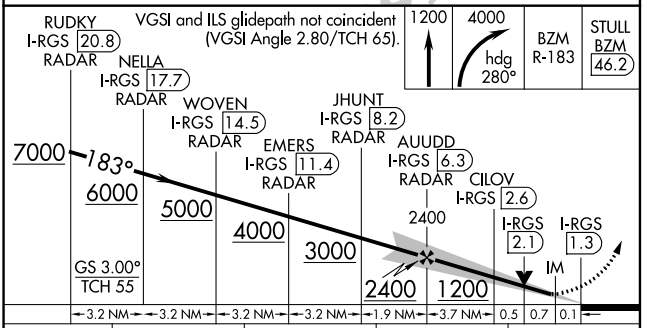

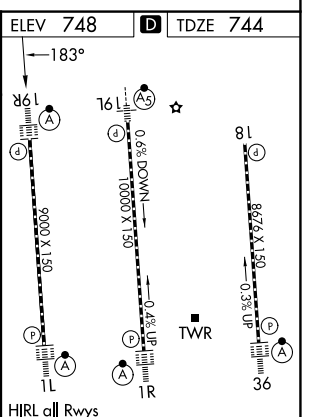

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, and 36

CATEGORY	A	B	C	D
S-ILS 19R		944/18 200 (200-½)		
S-LOC 19R	1200/24 456 (500-½)		1200/45 456 (500-⅞)	
CILOV FIX MINIMUMS (DME REQUIRED)				
S-LOC 19R	1040/24 296 (300-½)			

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026