RNAV (GPS) Y RWY 18

CHARLOTTE/DOUGLAS INTL (CLT)


WAAS	APP CRS	Rwy Ldg	8676
CH 81849	183°	TDZE	748
W18A		Apt Elev	748


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Rwy 18 helicopter visibility reduction below RVR 4000 NA. Simultaneous approach authorized. Circling NA at night. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.


MISSED APPROACH: Climb to 1400 then climbing left turn to 4000 direct LOCAS and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (18-36)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (1R-19L)	121.9 348.6 (E)
	134.75 (296°-360°)		133.35	257.8 (1L-19R)	

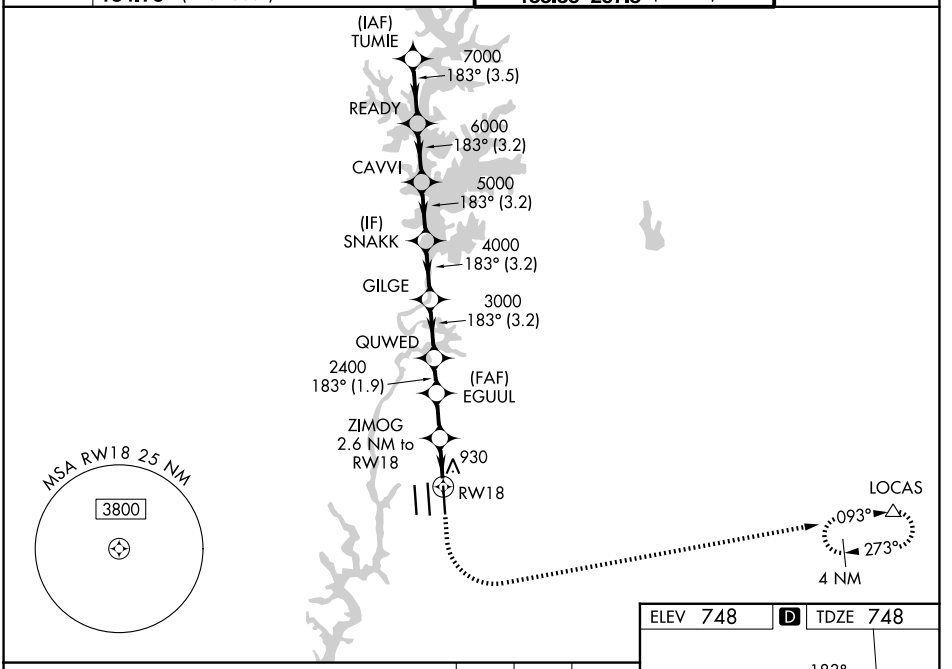

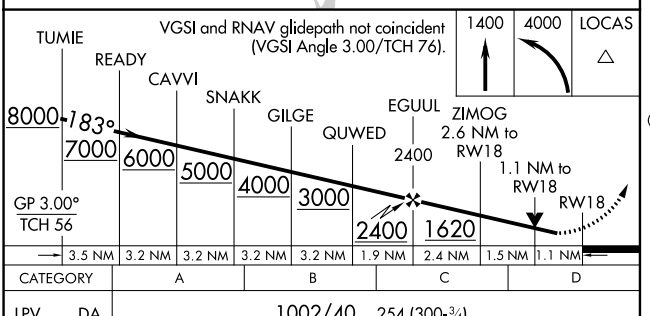

CATEGORY	A	B	C	D
LPV DA	1002/40 254 (300-¾)			
LNAV/VNAV DA	1179-1¼ 431 (500-1¼)			
LNAV MDA	1180/55 432 (500-1)		1180-1¼ 432 (500-1¼)	
CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

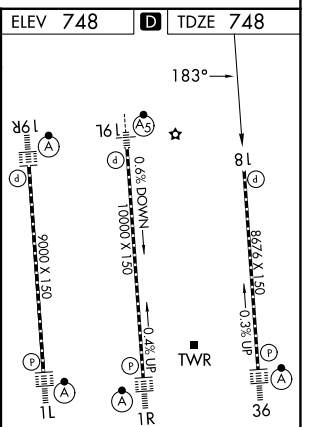

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, and 36

SE-2, 29 OCT 2026 to 26 NOV 2026