RNAV (GPS) Y RWY 19L

CHARLOTTE/DOUGLAS INTL (CLT)

WAAS	APP CRS	Rwy Ldg 10000
CH 49247	183°	TDZE 742
W19B		Apt Elev 748


RNP APCH - GPS.


Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and increase LNAV Cats C/D visibility to 1⅜ SM.
*RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 3000 direct DENNE and hold.

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (18-36)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (1R-19L)	121.9 348.6 (E)
	134.75 (296°-360°)		133.35	257.8 (1L-19R)	

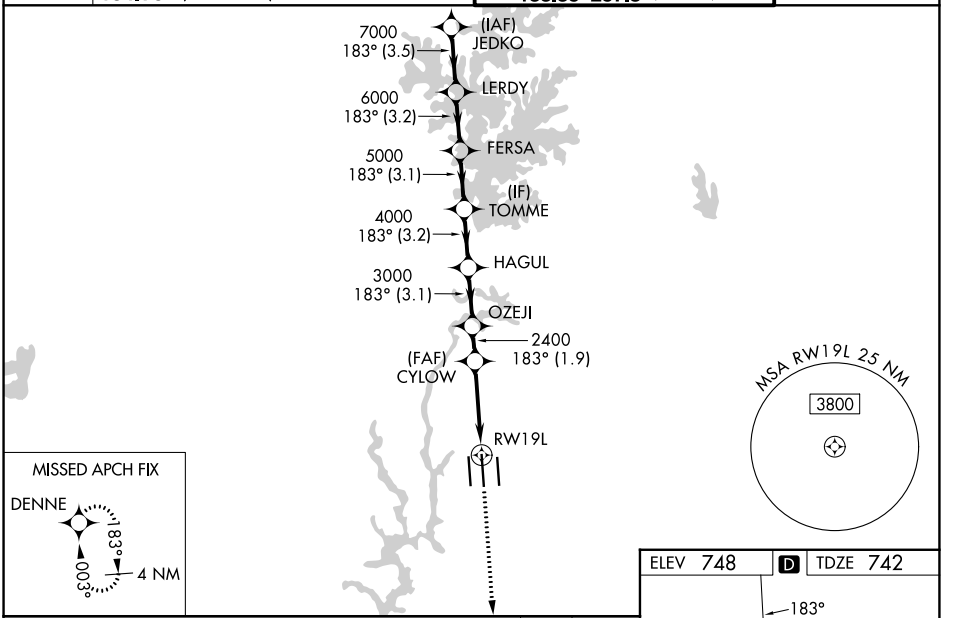

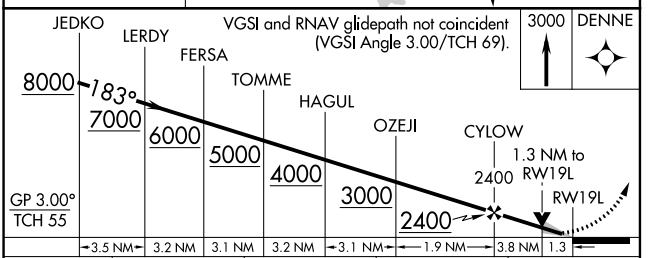

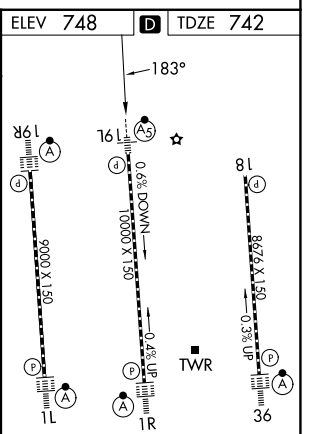

CATEGORY	A	B	C	D
LPV DA*	942/24 200 (200-½)			
LNAV/VNAV DA	1144/40 402 (400-¾)			
LNAV MDA	1220/24 478 (500-½)		1220/50 478 (500-1)	
CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, 36

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026