WAAS CH 56515 W01A	APP CRS 003°	Rwy Ldg 9000 TDZE 744 Apt Elev 748

RNAV (GPS) Y RWY 1L

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.


ALSF-2


MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct BUDKE and hold.

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 257.2 (180°-359°) 120.05 (120°-295°) 307.8 (360°-179°) 134.75 (296°-360°)	118.1 257.8 (18-36) 126.4 257.8 (1R-19L) 133.35 257.8 (1L-19R)	121.8 348.6 (W) 121.9 348.6 (E)

MISSED APCH FIX




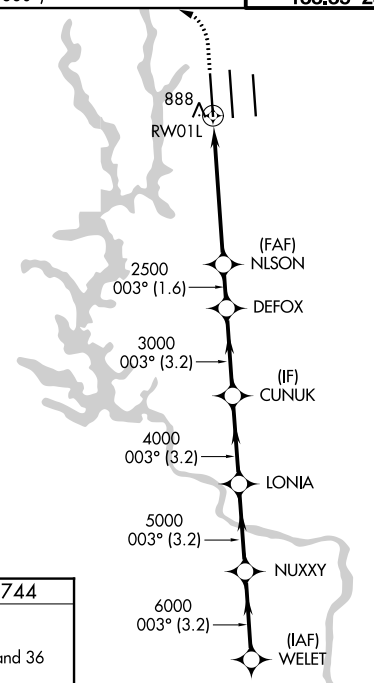




ELEV 748 D TDZE 744

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, and 36

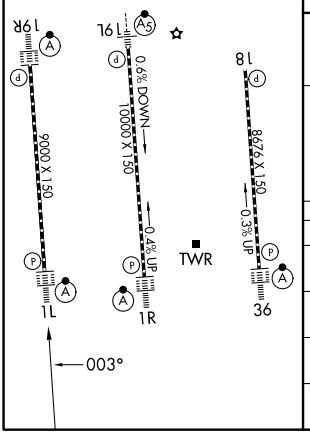

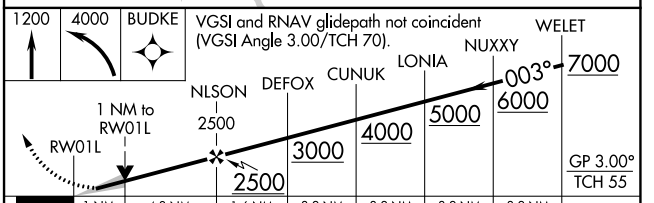

CATEGORY	A	B	C	D
LPV DA	944/18 200 (200-½)			
LNAV/VNAV DA	1049/24 305 (400-½)			
LNAV MDA	1140/24 396 (400-½)		1140/35 396 (400-⅝)	
CIRCLING	1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026