RNAV (GPS) Y RWY 36

CHARLOTTE/DOUGLAS INTL (CLT)

WAAS CH 42548 W36A	APP CRS 003°	Rwy Ldg 8390 TDZE 727 Apt Elev 748


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Simultaneous approach authorized. Circling NA at night. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 1320 then climbing right turn to 4000 direct LOCAS and hold.


D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (18-36)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (1R-19L)	121.9 348.6 (E)
	134.75 (296°-360°)		133.35	257.8 (1L-19R)	

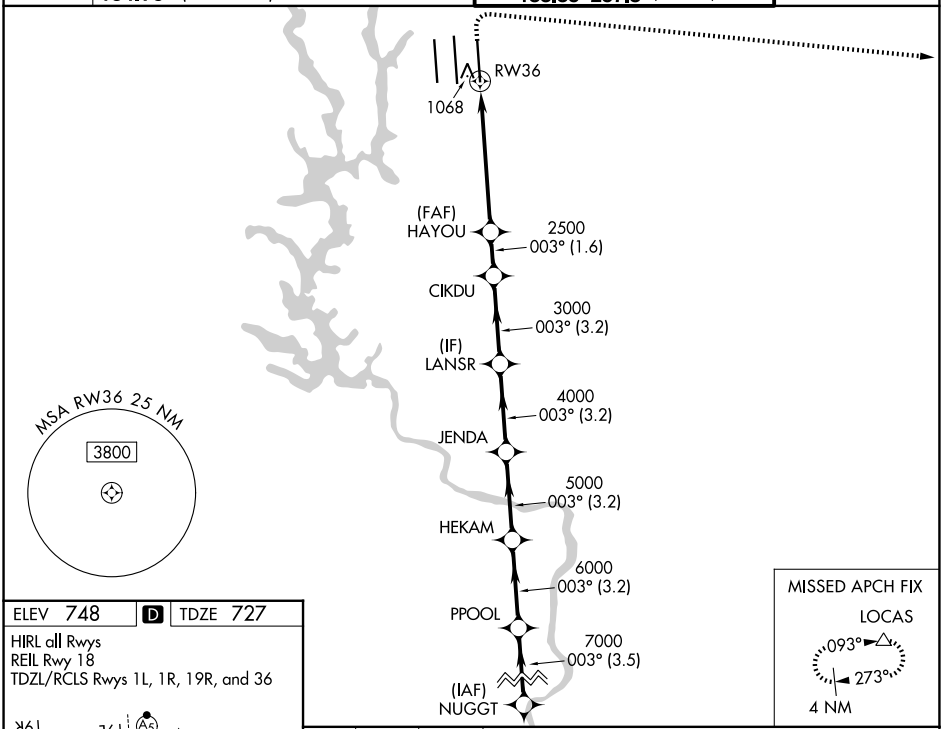

ELEV 748 D TDZE 727

HIRL all Rwys
REIL Rwy 18
TDZL/RCLS Rwys 1L, 1R, 19R, and 36

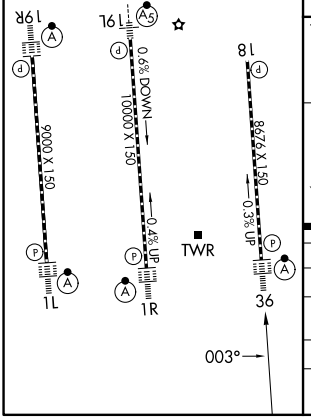

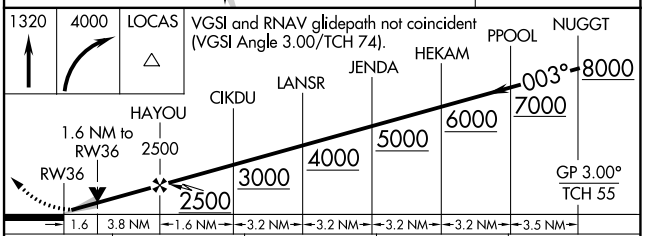

CATEGORY		A	B	C	D
LPV	DA	927/18 200 (200-½)			
LNAV/VNAV	DA	1229/55 502 (500-1)			
LNAV MDA		1320/24 593 (600-½)		1320-1¼ 593 (600-1¼)	
CIRCLING		1380-1 632 (700-1)		1500-2¼ 752 (800-2¼)	1500-2½ 752 (800-2½)

SE-2, 29 OCT 2026 to 26 NOV 2026