RNAV (GPS) RWY 5L

MC GHEE TYSON (TYS)

WAAS CH 48802 W05A	APP CRS 051°	Rwy Ldg 9508 TDZE 953 Apt Elev 986


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 1500 then climb to 4000 direct VXV VORTAC and hold, continue climb-in-hold to 4000.

ATIS	KNOXVILLE APP CON	KNOXVILLE TOWER	GND CON
128.35	123.9 360.8	121.2 257.8	121.9 348.6

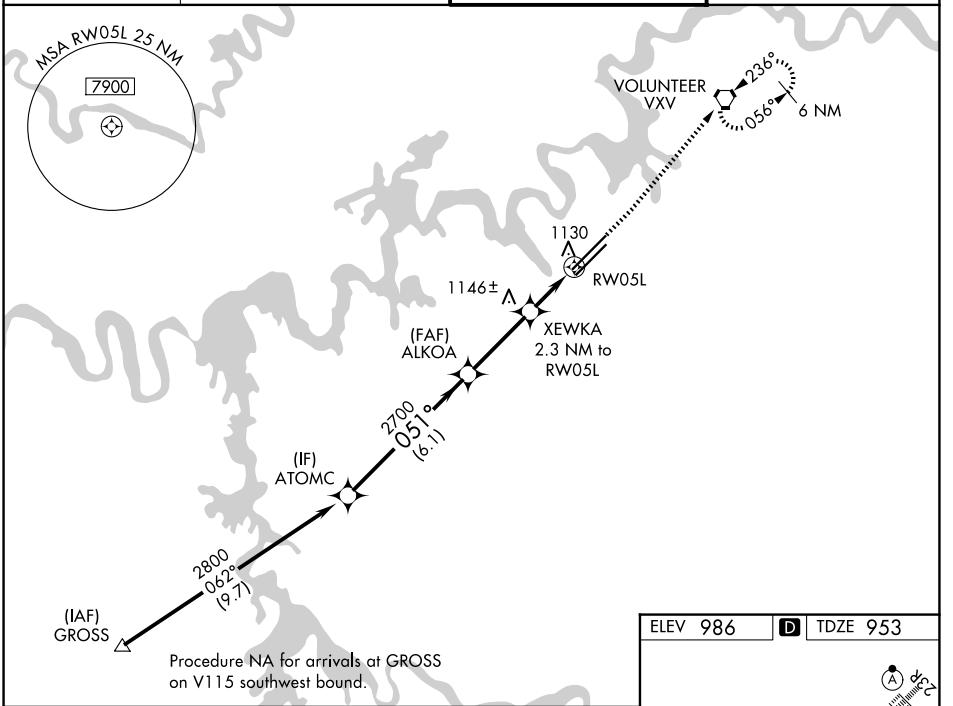

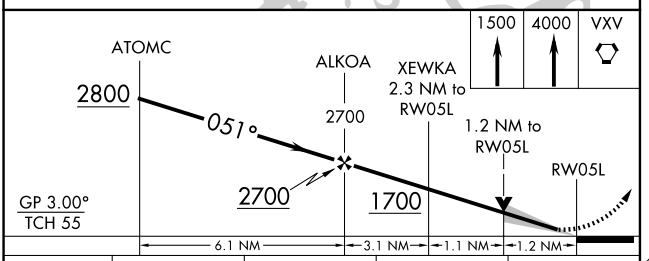

CATEGORY	A	B	C	D
LPV DA*	1153/24 200 (200-½)			
LNAV/VNAV DA	1291/26 338 (400-½)			
LNAV MDA	1380/24 427 (400-½)		1380/40 427 (400-¾)	
CIRCLING	1500-1 514 (600-1)	1560-1 574 (600-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)

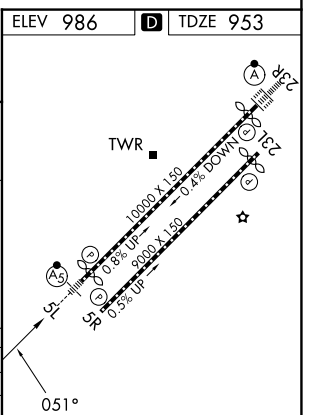

HIRL Rwys 5L-23R and 5R-23L
REIL Rwys 5R and 23L
TDZL/RCLS Rwy 23R

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026