RNAV (GPS) Y RWY 7R

LOS ANGELES INTL (LAX)


WAAS	APP CRS	Rwy Ldg	11095
CH 69603	071°	TDZE	128
W07B		Apt Elev	128


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C (41°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct ESINE and on track 071° to DOWNE and hold.


D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON
133.8	124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	133.9 239.3 (N) 120.95 379.1 (S)	121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)

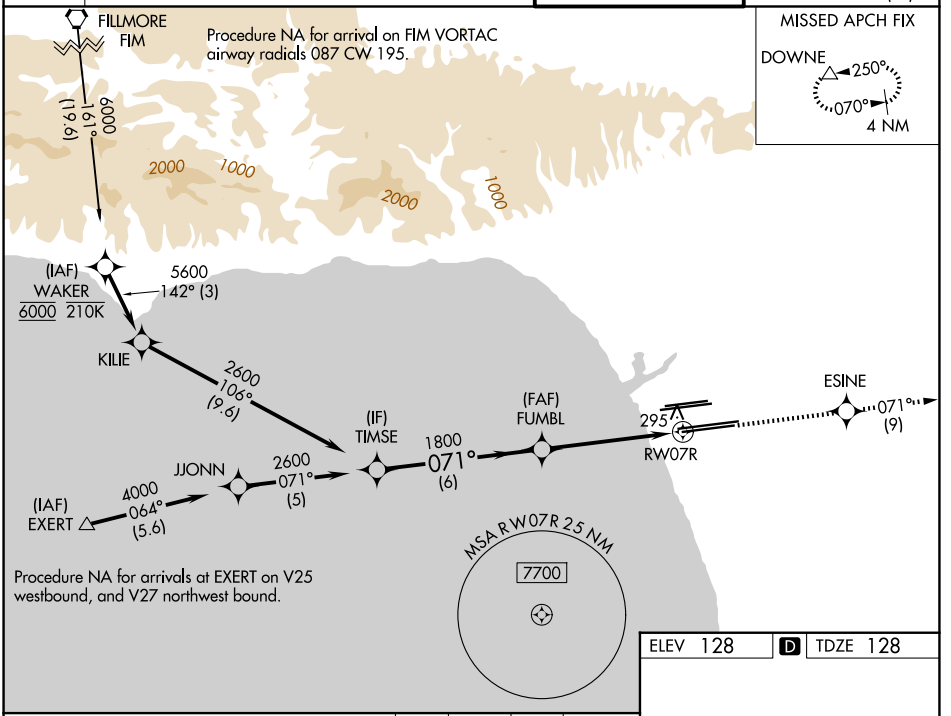

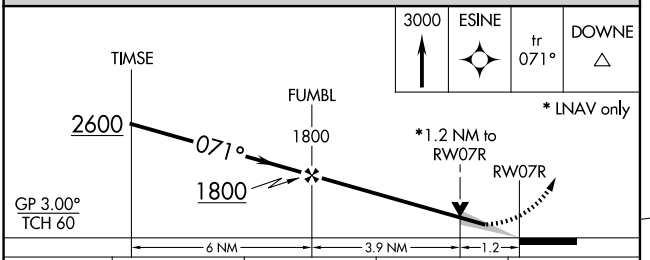

CATEGORY	A	B	C	D
LPV DA#	328/24 200 (200-½)			
LNAV/VNAV DA	462/30 334 (400-⅝)			
LNAV MDA	560/24 432 (500-½)		560/40 432 (500-¾)	

ELEV 128 D TDZE 128



TDZ/CL Rwys 6R, 7L, 24R, and 25L
HIRL all Rwys

SW-3, 29 OCT 2026 to 26 NOV 2026
SW-3, 29 OCT 2026 to 26 NOV 2026