TACAN RWY 28L

PORTLAND INTL (PDX)

TACAN	APP CRS	Rwy Ldg	TDZE	Apt Elev
CBU Chan 29 (109.2)	280°	11000	23	31


RADAR required for procedure entry.


For inop ALS, increase S-28L Cat C/D/E visibility to 1¾ SM.

MALSR


MISSED APPROACH: Climbing left turn to 4000 on CBU TACAN R-260 to BEAST INT/CBU 10 DME and hold, continue climb-in-hold to 4000.

D-ATIS	PORTLAND APP CON	PORTLAND TOWER	GND CON
128.35 269.9	124.35 299.2	118.7 257.8 (10L-28R) 123.775 251.125 (3-21, 10R-28L)	121.9 348.6

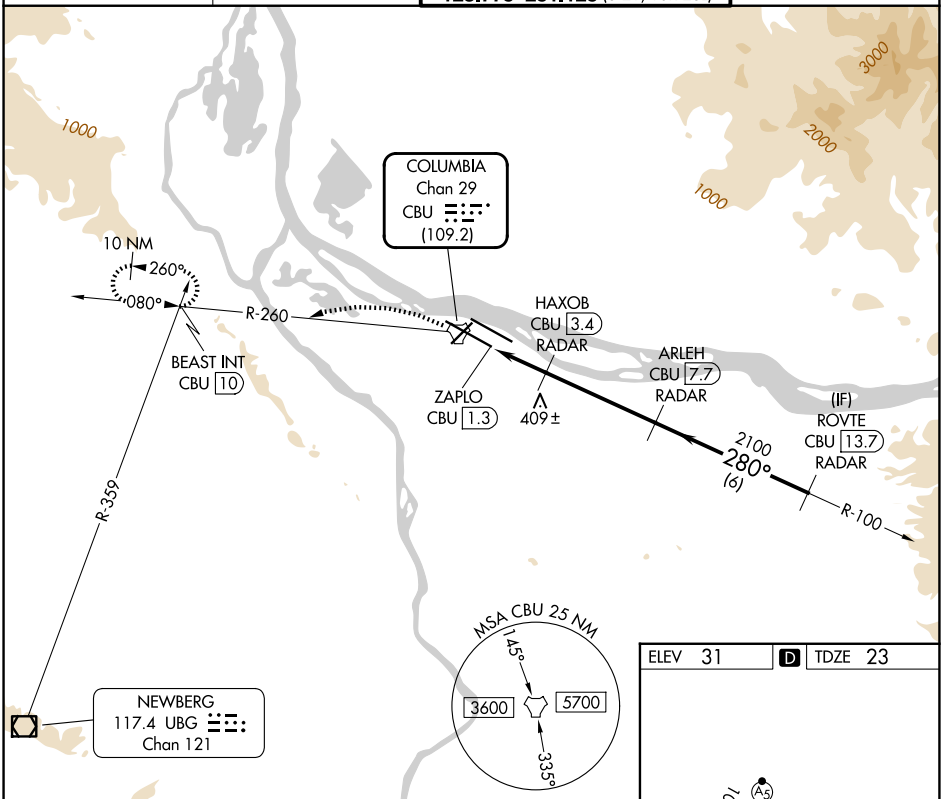

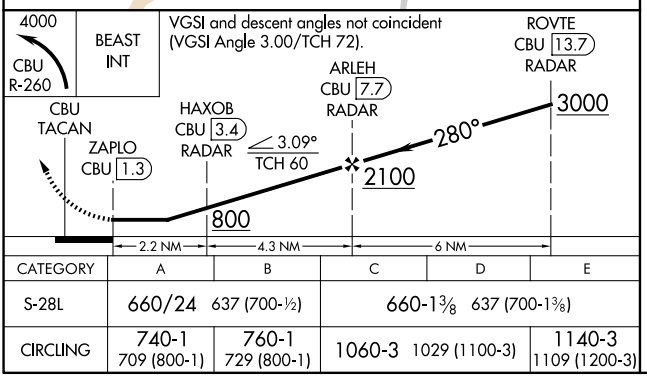

CATEGORY	A	B	C	D	E
S-28L	660/24 637 (700-½)		660-1⅜ 637 (700-1⅜)		
CIRCLING	740-1 709 (800-1)	760-1 729 (800-1)	1060-3 1029 (1100-3)		1140-3 1109 (1200-3)

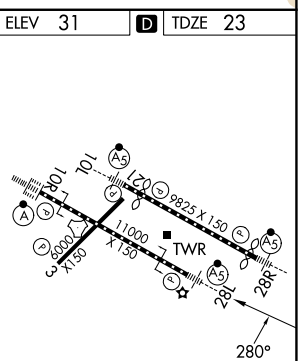

REIL Rwys 3 and 21
TDZL/RCLS Rwy 10R
MIRL Rwy 3-21
HIRL Rwys 10L-28R and 10R-28L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026