

WAAS CH 78306 W07A	APP CRS 074°	Rwy Ldg TDZE Apt Elev	6052 13 14
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 7

SANTA BARBARA MUNI (SBA)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. Circling Rwy 15L/R and 33L/R NA at night. Circling NA for Cats C and D north of Rwy 7-25. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cats C and D increase visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 700 then climbing right turn to 4000 direct GOLET and hold, continue climb-in-hold to 4000.

ATIS 132.65	SANTA BARBARA APP CON★ 120.55 319.15 (151°-329°) 125.4 291.1 (330°-150°)	SANTA BARBARA TOWER★ 119.7 (CTAF) 0 254.35	GND CON 121.7	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

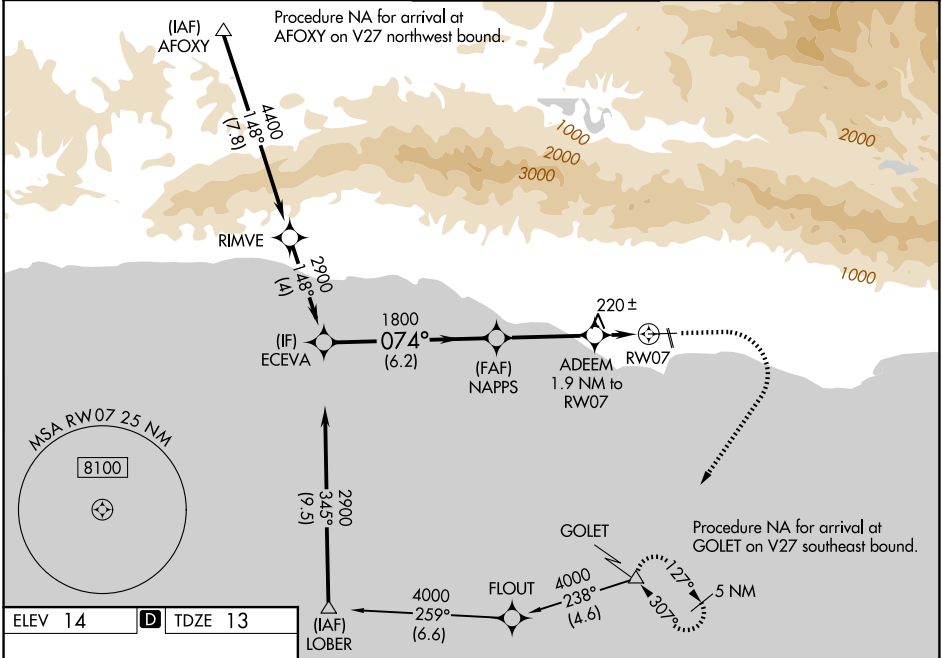

ELEV 14 TDZE 13

HIRL Rwy 7-25

MIRL Rwy 15R-33L

REIL Rwy 15R and 25L

ECEVA		NAPPS		ADEEM		RWY 7	
2900		1800		1.9 NM to RWY 7		1.3 NM to RWY 7	
074°		1800		680		RWY 7	
GP 3.00°		TCH 52		6.2 NM		3.5 NM	
CATEGORY		A		B		C	
LPV DA		263/24		250 (300-½)			
LNAV/VNAV DA		480/50		467 (500-1)			
LNAV MDA		480/24		467 (500-½)		480/50 467 (500-1)	
CIRCLING		700-1 686 (700-1)		760-1 746 (800-1)		760-2¼ 746 (800-2¼)	
						900-3 886 (900-3)	