
NRVNA ONE DEPARTURE (RNAV)

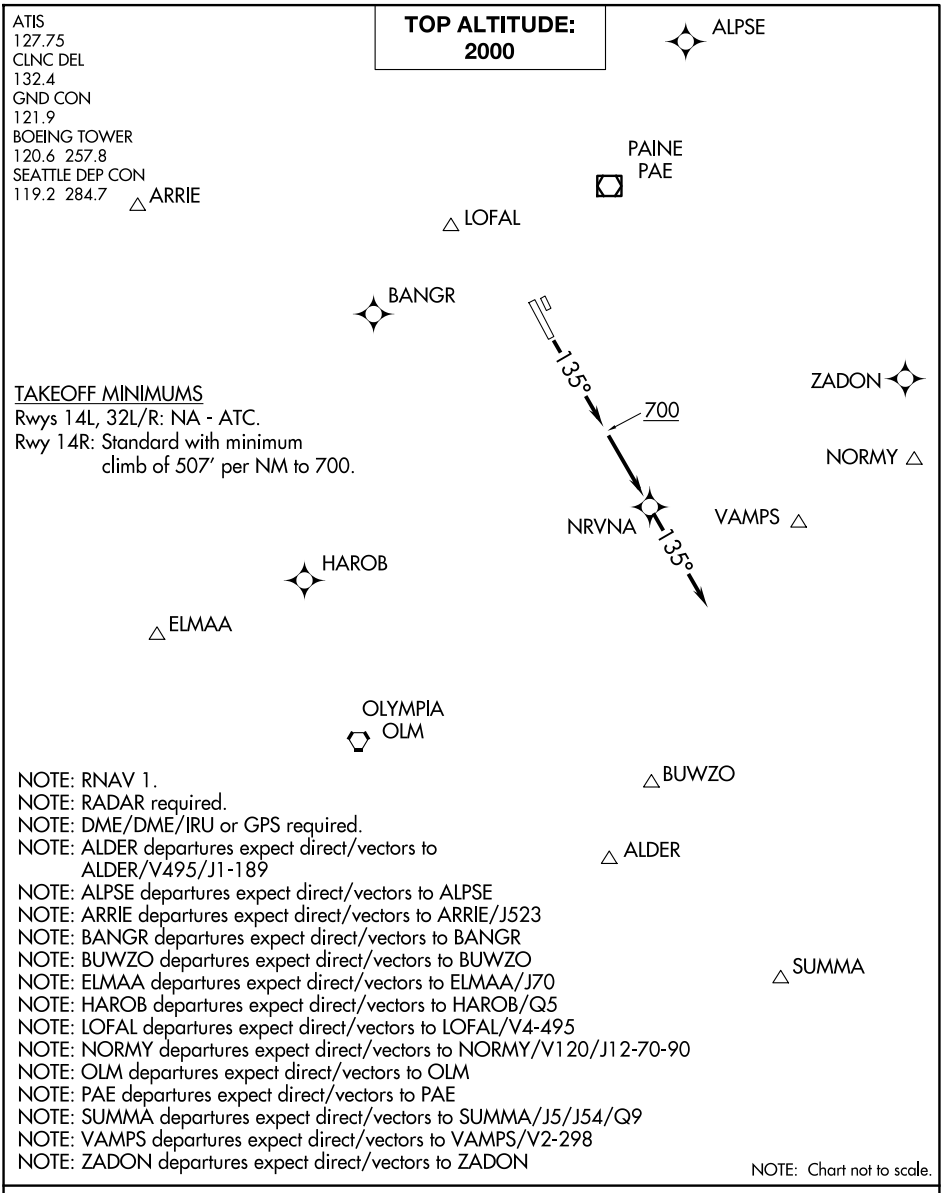

TAKEOFF MINIMUMS
Rwys 14L, 32L/R: NA - ATC.
Rwy 14R: Standard with minimum climb of 507' per NM to 700.

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: ALDER departures expect direct/vectors to ALDER/V495/J1-189
NOTE: ALPSE departures expect direct/vectors to ALPSE
NOTE: ARRIE departures expect direct/vectors to ARRIE/J523
NOTE: BANGR departures expect direct/vectors to BANGR
NOTE: BUWZO departures expect direct/vectors to BUWZO
NOTE: ELMAA departures expect direct/vectors to ELMAA/J70
NOTE: HAROB departures expect direct/vectors to HAROB/Q5
NOTE: LOFAL departures expect direct/vectors to LOFAL/V4-495
NOTE: NORMY departures expect direct/vectors to NORMY/V120/J12-70-90
NOTE: OLM departures expect direct/vectors to OLM
NOTE: PAE departures expect direct/vectors to PAE
NOTE: SUMMA departures expect direct/vectors to SUMMA/J5/J54/Q9
NOTE: VAMPS departures expect direct/vectors to VAMPS/V2-298
NOTE: ZADON departures expect direct/vectors to ZADON

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 14R: Climb heading 135° to 700, then direct NRVNA, then on track 135° for RADAR vectors to assigned route/fix, maintain 2000 or as assigned by ATC.
Expect clearance to filed altitude/flight level within three minutes after departure.

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026